


The FLANGE friction overrunning clutch is set apart in that it mounts the overrunning feature to the flywheel instead of the driveshaft. This allows for a larger diameter, thinner clutch which greatly improves heat flow from the friction surfaces to atmosphere. The clutch uses the same patented technology to manage heat as the rest of the TorQmaster family of friction clutches. Convective cooling is increased to allow the clutch to cool up to four times faster than competitive clutches. Because the friction discs are larger in diameter, the number of friction faces can be reduced while improving durability and sensitivity to wear and adjustment. Assembly and service is also more ergonomic, being modular the maximum lifted weight is 13 kg.

PERFORMANCE BENEFITS

- IMPLEMENT OVERLOAD PROTECTION
- ISOLATES AND DISSIPATES HEAT MINIMIZING DOWNTIME FOR HIGHER PRODUCTIVITY
- CORROSION RESISTANT FRICTION DISCS
- SIMPLE DESIGN AFFORDS MORE RELIABLE TORQUE SETTING
- MINIMAL MAINTENANCE
- EASILY ADJUSTABLE TO OPTIMIZE THE CAPACITY OF THE IMPLEMENT
- MODULAR DESIGN WITH OVERRUNNING FOR HIGH INERTIA LOADS
- SMOOTH OPERATION, NO DAMAGING TORQUE SPIKES
- TORQUE TRANSMISSION WHILE SLIPPING AIDS IN DISLODGING PLUGS FOR INCREASED PRODUCTIVITY

TORQMASTER F-TYPE FRICTION CLUTCH

Weasler®

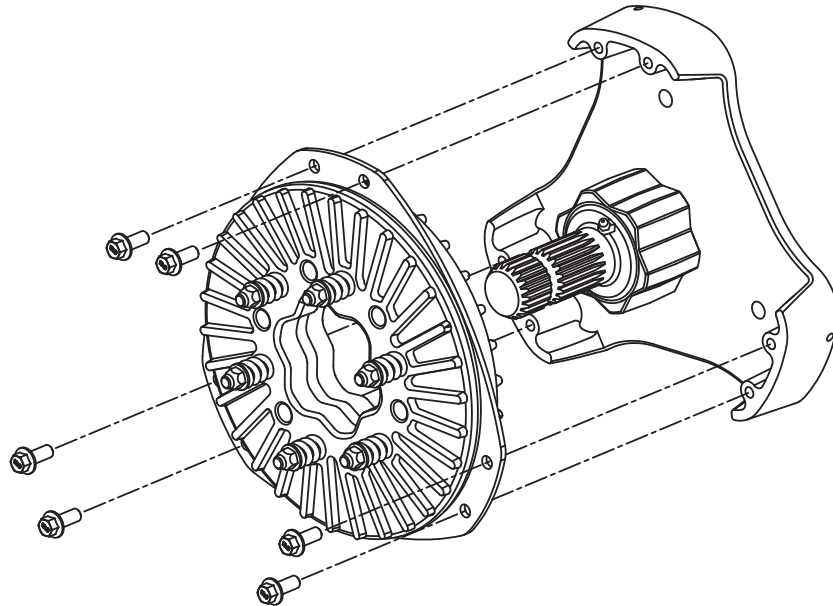

DESIGN FEATURES

- MODULAR CLUTCH, OFFERING A WIDE VARIETY OF FLYWHEEL AND DRIVESHAFT CONNECTIONS
 - UNIQUE OVERRUNNING FLANGE MOUNTS TO FLYWHEEL WITH CUSTOM BOLT PATTERNS
 - FRICTION CLUTCH PACK BOLTS TO OVERRUNNING FLANGE FOR EASY SERVICE AND THERMAL ISOLATION
 - FRICTION CLUTCH PACK HAS WIDE TORQUE CAPACITY RANGE TO FIT MOST APPLICATIONS
 - GRAY IRON CLUTCH PLATES
 - SLIP SURFACES ARE CONTROLLED TO BE AGAINST IRON FOR EFFICIENT HEAT DISSIPATION AND RELIABLE FRICTION COEFFICIENT (PATENTED)
 - FINS ARE INCORPORATED TO QUICKLY DISSIPATE HEAT AND ISOLATE IT FROM OTHER COMPONENTS
 - LARGE FRICTION SURFACE AREA AND LOW FACE PRESSURE INCREASES WEAR LIFE
 - ADJUSTABLE COIL SPRINGS
 - DESIGN ALLOWS THE CLUTCH FRICTION DISCS TO WEAR UNIFORMLY FOR EXTENDED LIFE
 - TORQUE PROTECTION LEVEL IS DETERMINED BY SPRING QUANTITY AND HEIGHT SELECTION
- TORQUE SETTINGS AVAILABLE FROM 6000 TO 24000 in•lb (680 TO 2700 Nm)