




Weasler®

CV JOINT

50° CONSTANT VELOCITY

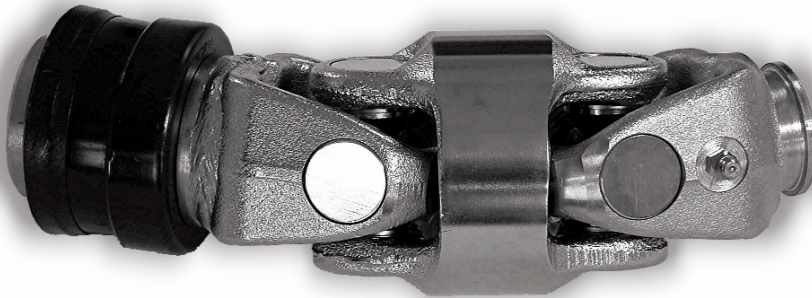

The constant velocity universal joint (CV) allows smooth machine operation through a broad range of motion. These joints allow the machine to be designed with the input shaft in the best operating position and yet allow the operator to maneuver as needed. The CV delivers constant power by self-canceling torque and speed fluctuations typically found in single cardan-type universal joints.

PERFORMANCE BENEFITS

- SIZES AVAILABLE FROM 15 HP (12 kW) AT 540 RPM UP TO 232 HP (173 kW) AT 1000 RPM FOR 1000 HOURS OF LIFE AT 10° TOTAL ANGLE
- MINIMAL VIBRATION AT HIGH TURN ANGLES
- LIGHTWEIGHT COMPACT DESIGN FOR HANDLING EASE
- HARDENED BALL AND SOCKET PROVIDES LONG LIFE
- NUMEROUS TELESCOPING MEMBERS TO MEET APPLICATION REQUIREMENTS
- AUTO-LOK YOKES AVAILABLE FOR EASE OF ATTACHMENT
- ARTICULATED GUARD SYSTEM (OPTIONAL) PROVIDES FULL COVERAGE AT MAXIMUM ANGLE
- CAN BE LUBRICATED WITH THE GUARD SYSTEM IN POSITION
- GUARD SYSTEMS MEET ALL INTERNATIONAL STANDARDS
- "E" CROSS AND BEARING KIT AVAILABLE FOR INCREASED DYNAMIC CAPACITY
- GREATER OPERATING ANGLES THAN TRADITIONAL BALL-STYLE CV'S
- CAN BE USED FOR HIGH SPEED APPLICATIONS UP TO 3600 RPM


Quality fits. Every time.



Weasler®

CV JOINT

50° CONSTANT VELOCITY

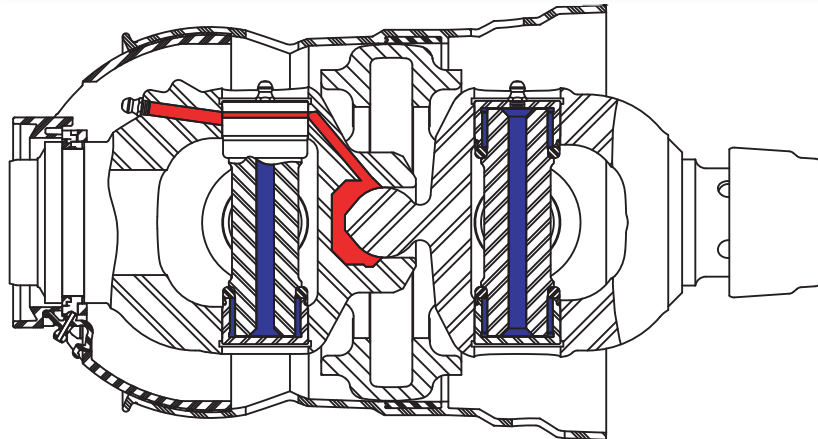

DESIGN FEATURES

- 50° MAXIMUM SHORT DURATION OR STANDSTILL OPERATION

WARNING: OPERATING BEYOND 50° WILL RESULT IN JOINT DAMAGE

- 40° MAXIMUM CONTINUOUS OPERATION

NOTE: OPERATING CONDITIONS MUST BE REVIEWED BY WEASLER APPLICATIONS ENGINEERING.

- PRESSURIZED BALL & SOCKET LUBRICATION SYSTEM (PATENTED)
- HARDENED BALL AND SOCKET (PATENTED)
- COMPACT SIZE
- INTEGRAL BRIDGE YOKES
- TELESOPING MEMBERS
 - HARDENED SPLINE OR RECTANGULAR SHAFTING
 - STANDARD COATED PROFILE TUBE SIZES
- AUTO-LOK ATTACHMENT AVAILABLE (PATENTED)
- CE CERTIFIED AND ISO COMPLIANT GUARD SYSTEMS
- OPERATING TORQUE UP TO 30,000 in•lb (3400 Nm)
- "E" CROSS AND BEARING KIT AVAILABLE FOR INCREASED DYNAMIC CAPACITY

Weasler Engineering, Inc.
P.O. Box 558, West Bend, WI 53095 USA
Tel: +1-262.338.2161, Fax: +1-262.338.3709
E-mail: oemsales@weasler.com
web site: www.weasler.com

Weasler Engineering BV
P.O. Box 266, 6600 AG, Wijchen, The Netherlands
Tel: +31 (0)24 64 89 100, Fax: +31 (0)24 64 89 109
E-mail: sales@weasler.nl
web site: www.weasler.com

Weasler Engineering Kft
P.O. Box 262, H6001, Kecskemet, Hungary
Tel: +36 (0)76 500 410, Fax: +36 (0)76 500 415
E-mail: sales@weasler.nl
web site: www.weasler.com