




Weasler®

# SPARE PARTS CATALOGUE

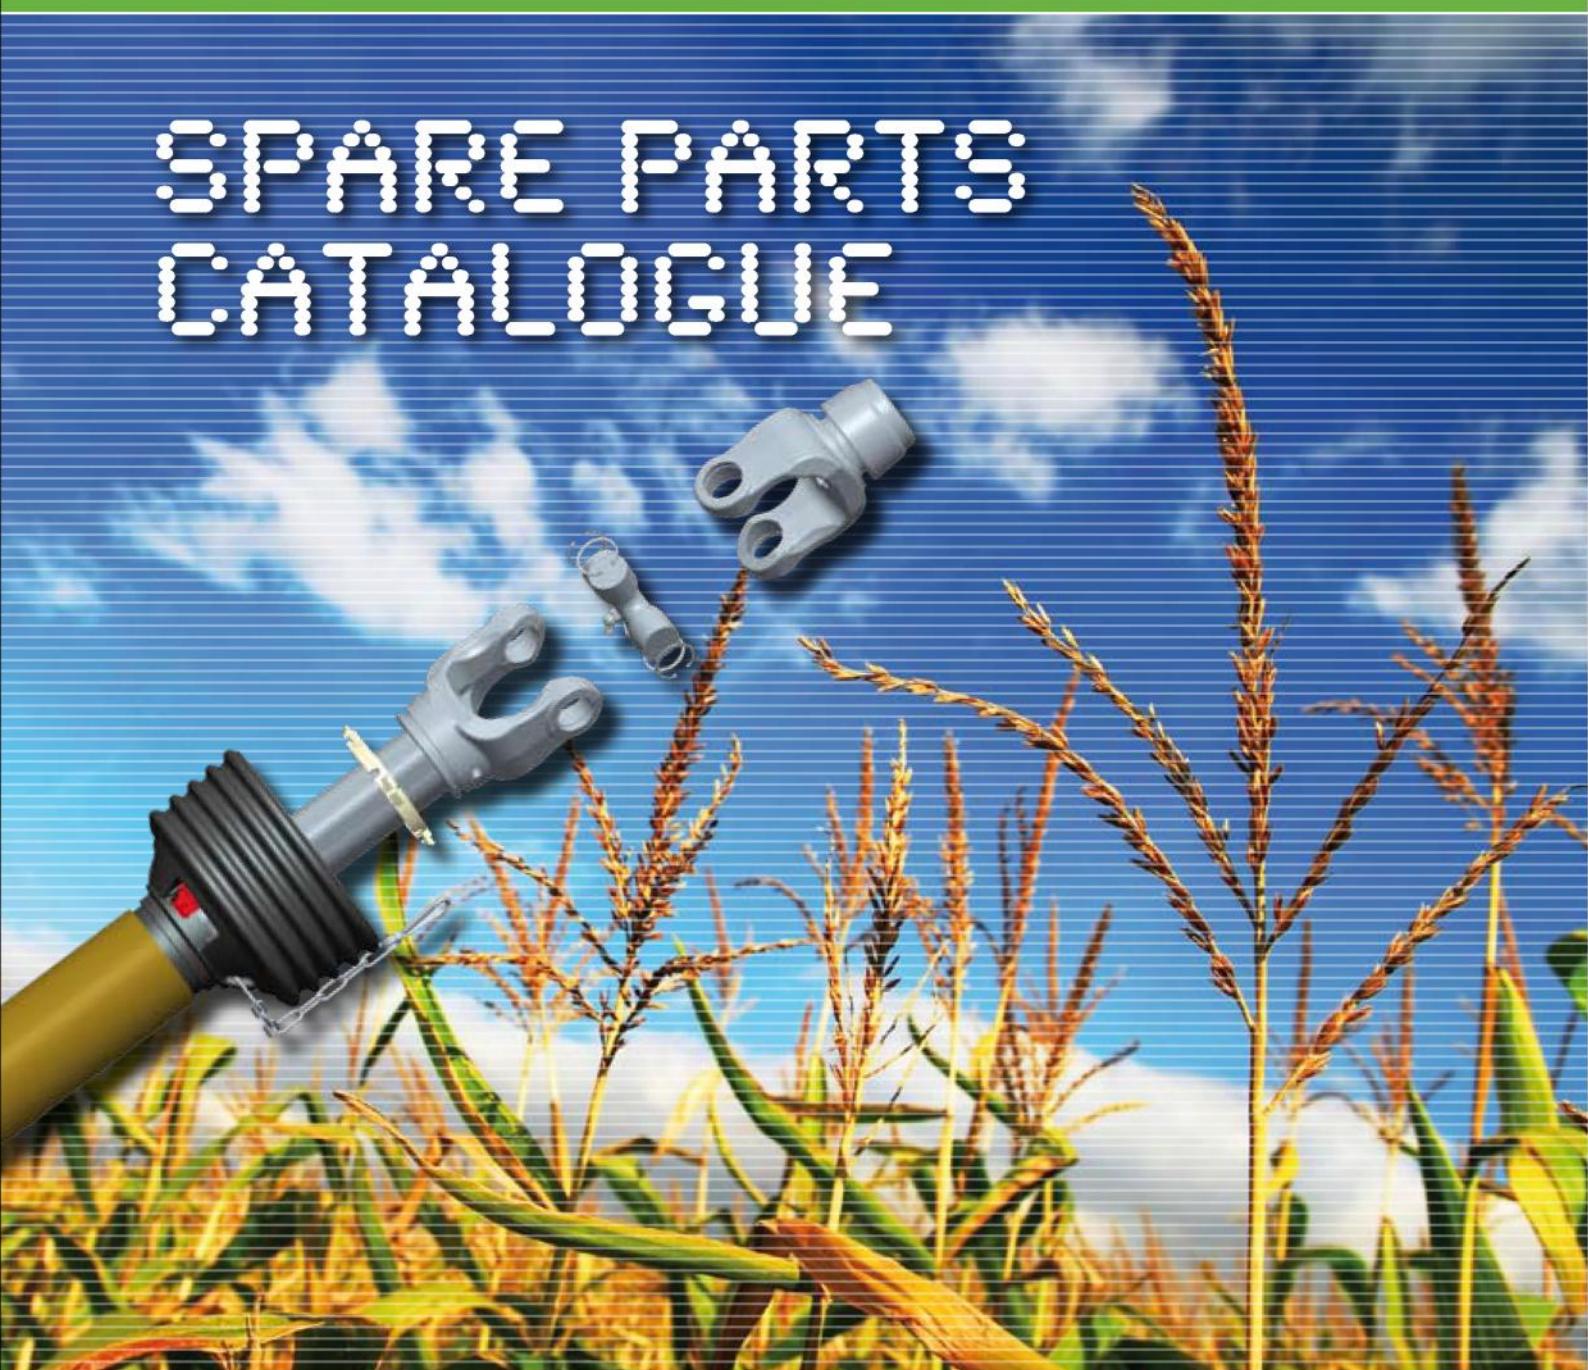

PTO drive shafts &  
components





Weasler®

Safety  
Instructions

Greasing

Merchandisers

AB-Series

AW-Series

CV-Series

Safety  
Clutches

Splines &  
Dimensions

# CONTENT

Safety Instructions	3
Greasing Recommendations	9
Merchandisers	15
AB-Series PTO Drive Shafts & Components	19
AW-Series PTO Drive Shafts & Components	63
80° Constant Velocity PTO Drive Shafts & Components	97
Safety Clutches	121
PTO Splines, Dimensions & Power Rating	127

## Introduction

---

2011

The Weasler Engineering group is one of the world's leading manufacturers of PTO drive shafts and components for Agricultural and Lawn & Turf machinery. Weasler Engineering BV, based in Wijchen, The Netherlands, is a subsidiary of Weasler Engineering Inc. in West Bend, Wisconsin, USA.

Weasler Engineering's wide range of products feature the German-style shafts (lemon and star profile tubing); the Italian-style shafts (triangular profile tubing) and the North American-style (rectangular, square and splined shafting). Weasler offers the widest range of spare parts in the market with drive shafts ranging from 3 kW/4 HP up to 197 kW/264 HP. Weasler also offers high speed drive shafts (up to 3.600 rpm) as well as a broad range of high end gearboxes. Weasler supplies quality products to all major Original Equipment Manufacturers (OEMs) worldwide and is a market leader in North America for both production drive shafts and spare parts.

Years of experience, with a commitment to research and development, has allowed Weasler Engineering to develop the patented EASY LOCK safety guard as well as the patented fully enclosed wide angle guard and integral safety guard. With this product offering Weasler has proven itself as a manufacturer of user-friendly safety guards for PTO drive shafts. These safety guards have been tested and are CE approved to EN ISO 5674.

This catalogue does not include other Weasler innovations such as the 50° and 80° Wide Angle Constant Velocity PTO drive shafts with extended lubrication intervals up to 250 hours (application specific) and cam-type cut-out clutches. It does however include Auto-Lok yokes for easy hook-up of the driveline; friction clutches; "E" (Extended Lubrication) cross and bearing kits with lubrication intervals from 50 to 250 hours (application specific); and our 77 Series heavy duty PTO drive shafts.

Weasler Engineering offers a full range of aftermarket products to a worldwide network of distributors and agents. A wide range of products and marketing services are available to help increase effectiveness of repairs such as a user-friendly catalogue and marketing tools [including our unique Transparency Identification System (T.I.S.)].

All facilities in the Weasler Engineering group have an ISO 9001:2008 Registered Quality Management System. Weasler maintains a continuous focus on quality, safety and innovation and the Weasler brand stands for high quality, reliable and flexible service.

Please contact us if you would like further information about our products and the benefits Weasler Engineering can bring to your company.

This catalogue replaces all previously published information.

*Quality fits. Every time.*



**Weasler®**

### Weasler Engineering BV

P.O. Box 266, 6600 AG, Wijchen, The Netherlands  
Tel: +31-24-64 89 100, Fax: +31-24-64 89 109  
E-mail: sales@weasler.nl  
web site: www.weasler.com



Weasler®

Safety  
Instructions

# SAFETY INSTRUCTIONS

# Safety Instructions

## General:

It is not allowed to use the PTO drive shaft without guard, with a damaged guard or without using the restraining members correctly attached. A drive shaft guard restraining system is required in the European Union (EU) countries. Worn or damaged parts have to be replaced with compatible parts. Do not expose guarded parts of the shaft by cutting or enlarging the grease access holes. Do not step on or over a PTO drive shaft.

PTO drive shafts and (safety) clutches have to match the power take off and the machine type. See the instructions with your machine for recommended type and size of shaft and clutches. Overload can cause damage. Do not operate above recommended speeds.

It is not allowed to connect clutches to the tractor PTO shaft in the European Union (EU) countries. No device (e.g. adaptors) shall be installed between the tractor PTO shaft and the PTO drive shaft. No changes except the length adjustment may be made to the PTO drive shaft and its guard.

## Symbols on guard:

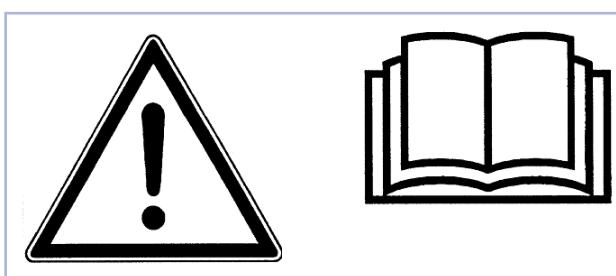


Figure A: Always read the operator's manual!

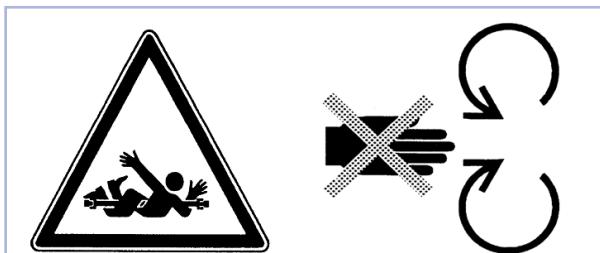


Figure B: Do not open or remove safety guard while machine or PTO shaft is running!

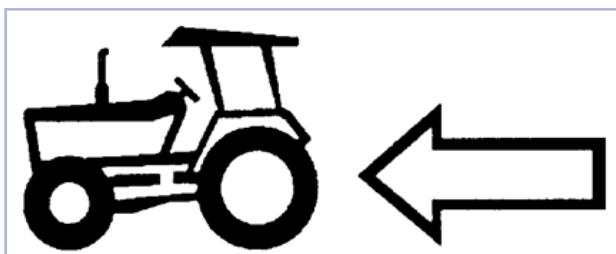


Figure C: Assemble the PTO drive shaft with arrow if marked on the guard) pointed to the tractor.

## Coupling the PTO drive shaft:

Clean and grease the tractor PTO shaft and machine implement shaft (Figure D).

- A) QD-Pin: Press quick-disconnect pin and simultaneously slide the PTO drive shaft on the PTO shaft until the pin engages.
- B) Safety Slide Lok: Slide the tractor yoke partially on the tractor PTO shaft and then slide and hold the Safety Slide Lok collar rearward. Then slide the yoke on the tractor PTO shaft until the collar can be moved forward into the locked position.
- C) Auto-Lok: Slide the collar rearward until the collar locks in the rear position. Then slide the yoke on the tractor PTO shaft until the collar clicks into the locked position.

To avoid damage to the PTO drive shaft guard it may be necessary to remove the tractor drawbar for mounted and semi-mounted implements and the lower links secured in a suitable position for trailed machines.

Always check if the locks are securely engaged after coupling!

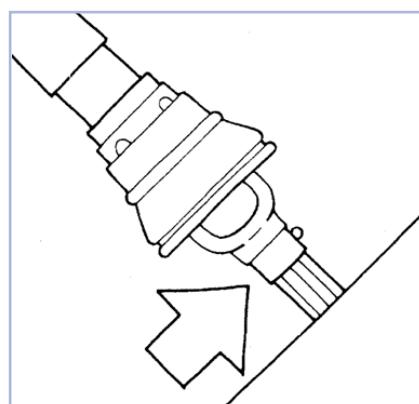


Figure D: Clean and grease

# Safety Instructions

## Restraining members:

A drive shaft guard restraining system is required in the European Union (EU) countries. If a chain is the method of restraining the drive shaft guard, the following must be taken into account: Chains must be securely attached to the master shield or the implement, in order to prevent the guard from rotating. Be careful to allow sufficient movement of the shaft in all working and transport positions (Figure E). Damaged chains need to be replaced immediately! Never use the chain to support the PTO drive shaft. If the PTO drive shaft is uncoupled from the tractor PTO shaft, or self-propelled machine, always connect the shaft to the support of the implement.

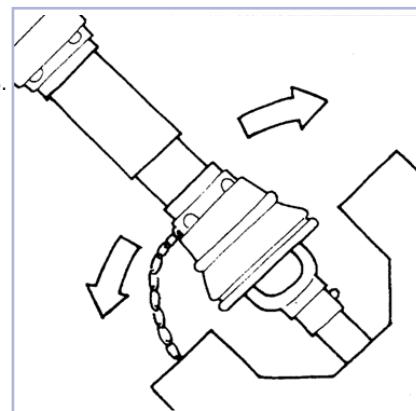


Figure E: Sufficient movement

## Maintenance:

Before putting into operation, after any prolonged period of not using or after seasonal storage, inspect the shaft carefully. Lubricate the PTO shaft with high quality multi-purpose grease (see Chapter 'Greasing Recommendations'). Inspect the whole safety guard of the shaft, as well as the tractor master shield and the implement guard. If the PTO drive shaft guard does not rotate free from the PTO drive shaft, is damaged, or the safety signs are missing or illegible, parts must be repaired or replaced. Replacing or repairing has to be done by your dealer. Make sure the PTO drive shaft is stored in a manner which will not damage the drive line guard.

Check if the safety guard is complete and that there are no damaged parts.

## Guarding:

After connecting the PTO drive shaft to the implement, always check for sufficient minimum overlap of 50 mm between the shield on the implement and the PTO drive shaft guard (see Figure F). Do not operate if the overlap is less than 50 mm!

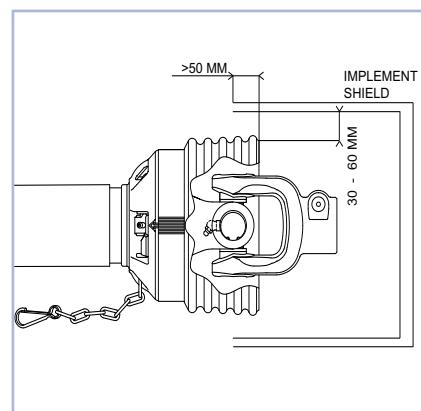


Figure F: Overlap

## Maximum working angles:

### Standard joints:

- 25° at continuous operation.
- 45° at short duration.
- 90° at standstill.

Always ensure equal joint angles (Figure G). Disengage the PTO drive shaft if joint angles are too large or unequal. Check that the guard of the PTO drive shaft does not interfere with parts of the tractor or implement (e.g. drawbarmaster shield, tires). Decrease the maximum working angles in those conditions.

### 50° constant velocity joints\*:

- 40° at continuous operation.
- 50° at short duration.
- 50° at standstill.

### 80° constant velocity joints\*:

- 25° at continuous operation.
- 80° at short duration.
- 80° at standstill.


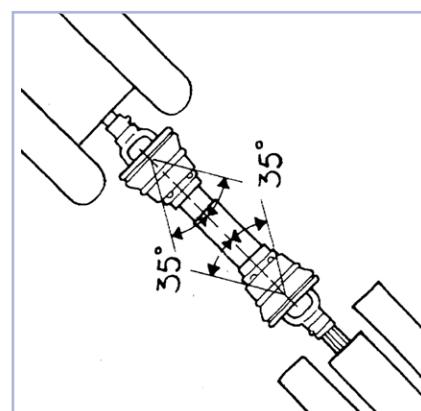


Figure G: Equal joint angles

\* operating conditions must be reviewed by Weasler applications engineering


# Safety Instructions

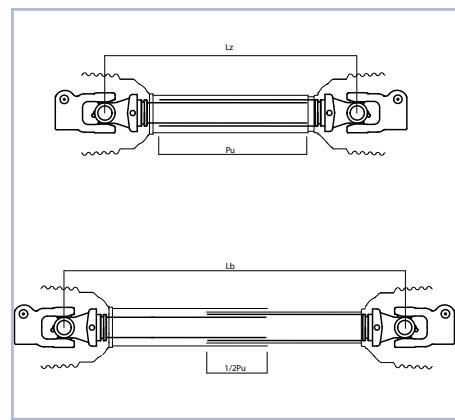

**Figure H:** Pu, Lz

**Minimum and maximum length (profile tubes):**


Try to obtain the greatest possible overlap on the profile tubes. In its working position, the PTO drive shaft must not be extended by more than half of the profile overlap (Pu) available when fully compressed Lz (Figure H). The minimum overlap should be at least 3 times the diameter of the inner profile tube.

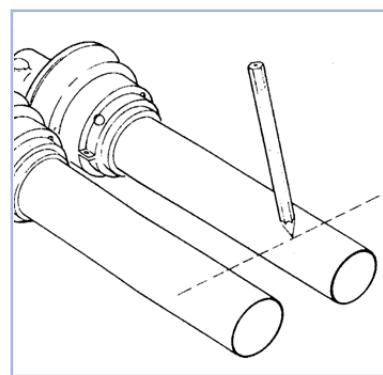


**Figure I:** Mark guard tube

**Minimum and maximum length (profile tubes):**


To adjust the length on the profile tubes, place the half shaft next to each other in the shortest working position and mark them (Figure I). Shorten inner guard tube as marked, shorten outer guard tube 40 mm shorter than inner guard tube. Shorten inner and outer sliding profiles by the same length as the inner guard tube (Figure J). Round off all sharp edges and remove burrs (Figure K). Grease sliding profiles (Figure L).

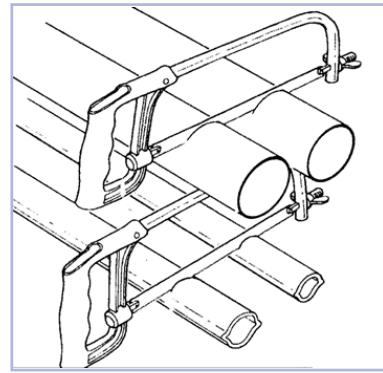

**Figure J:** Shorten

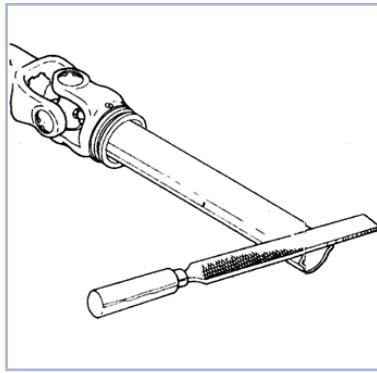

**Figure K:** Round off

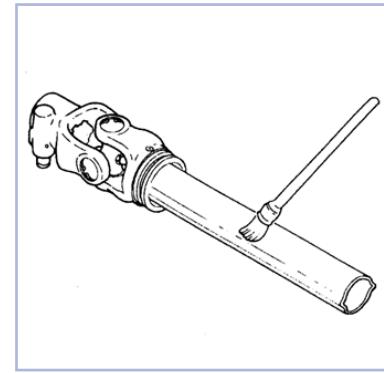


**Figure L:** Grease

**Explanation connections:**


- QD: Quick Disconnect
- SSL: Safety Slide Lock
- QDSL: Quick Disconnect Spring Lock
- AL: Auto Lok
- CBI: Clampbolt Interfering
- CBN: Clampbolt Non-Interfering

# Safety Instructions


## Instructions for assembling and disassembling of Easy Lock guards:

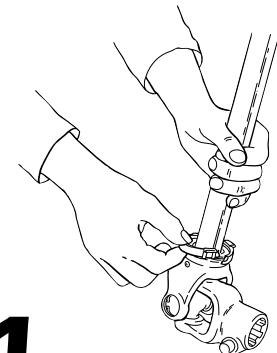**1**


Clean and grease bearing raceway before the bearing is placed in the groove.

**2**

Slide guard half over PTO drive shaft  
insert bearing tabs into the openings

**3**


Turn the bearing until it engages into the guard.

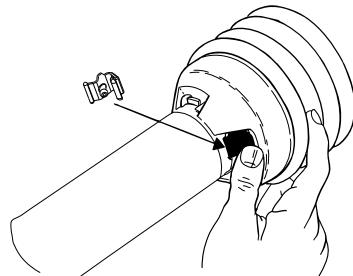**4**

Push the Easy Lock clip into position.  
The bearing and guard are now secu  
GUARD MUST ROTATE  
FREELY ON YOKES.

**5**

TO REMOVE GUARD - Use screw-  
driver to release Easy Lock clip. Turn  
the bearings to disengage from the  
guard and remove guard.

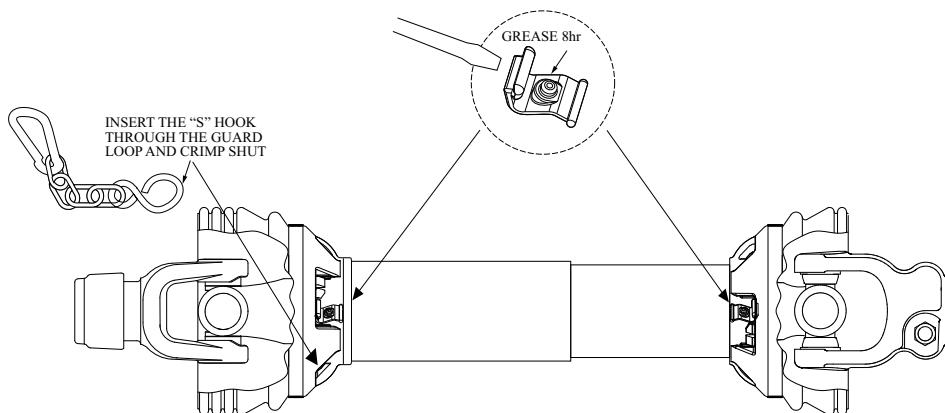

## **N O T E S**



Weasler®

# GREASING RECOMMENDATIONS

Greasing

# Greasing Recommendations

Be certain to follow greasing instructions as identified below\* \*\*:

Grease the PTO drive shaft with high quality multi-purpose grease every 8 shaft operating hours (unless otherwise specified on the guard). If access holes are available, grease the fittings through the access holes.

P-Kit: Standard Cross & Bearing Kit

E-Kit: Extended Lubrication Cross & Bearing Kit


Caution: replacement parts are not greased

**Replacement parts must be greased at time of assembly  
and during use per the greasing recommendations.**

\*Constant high angle applications may require a greasing interval of 4 hours

\*\*High speed applications may require a greasing interval of 8 hours


Greasing recommendations\* standard PTO drive shaft with P-Kits:

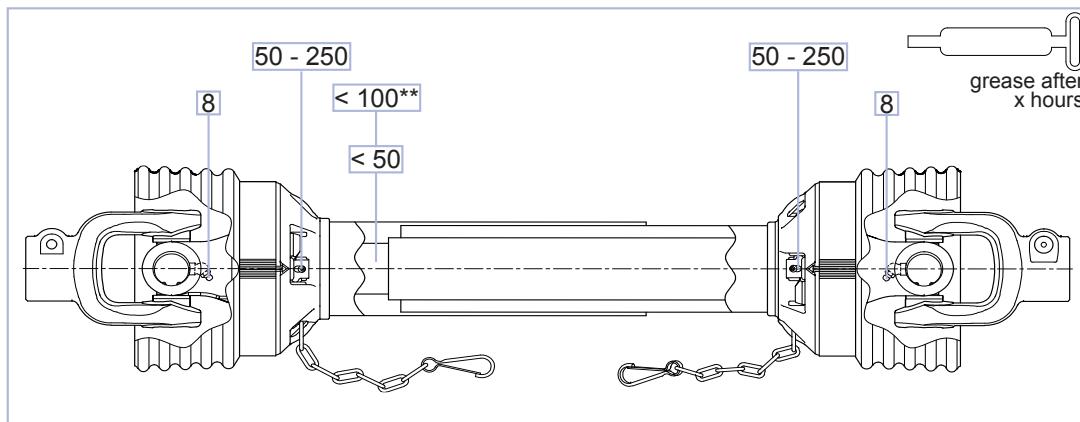

\* all greasing intervals are application dependent

\*\* with coated profile tubes

Greasing recommendations\* standard PTO drive shaft with E-kits:

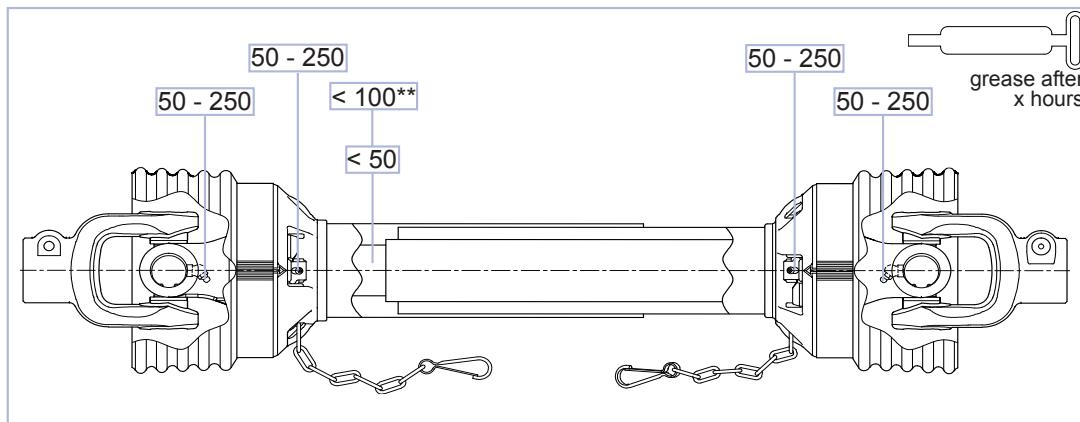


\* all greasing intervals are application dependent


\*\* with coated profile tubes

## Greasing Recommendations


Greasing recommendations\* 80° European Style constant velocity PTO drive shaft with P-Kits:

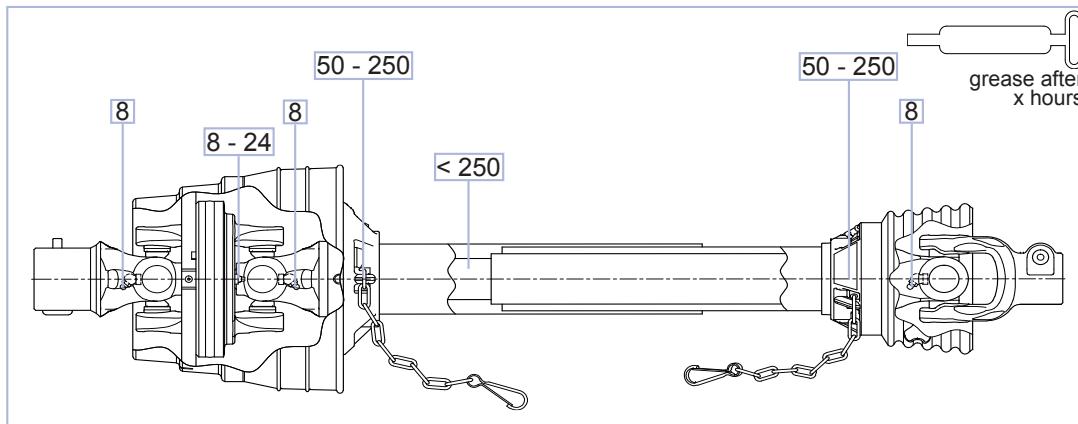

Greasing recommendations\* 80° European Style constant velocity PTO drive shaft with E-kits:

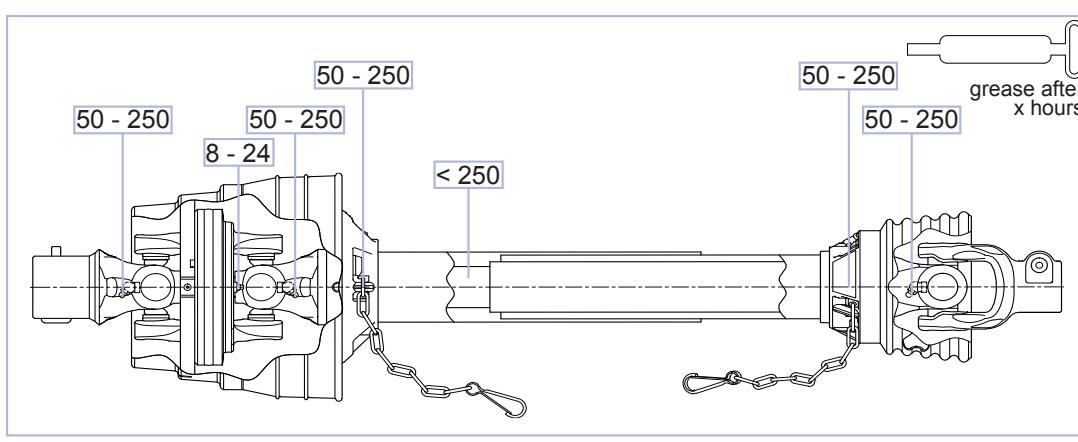


Greasing recommendations\* 80° World Wide constant velocity PTO drive shaft with P-Kits:

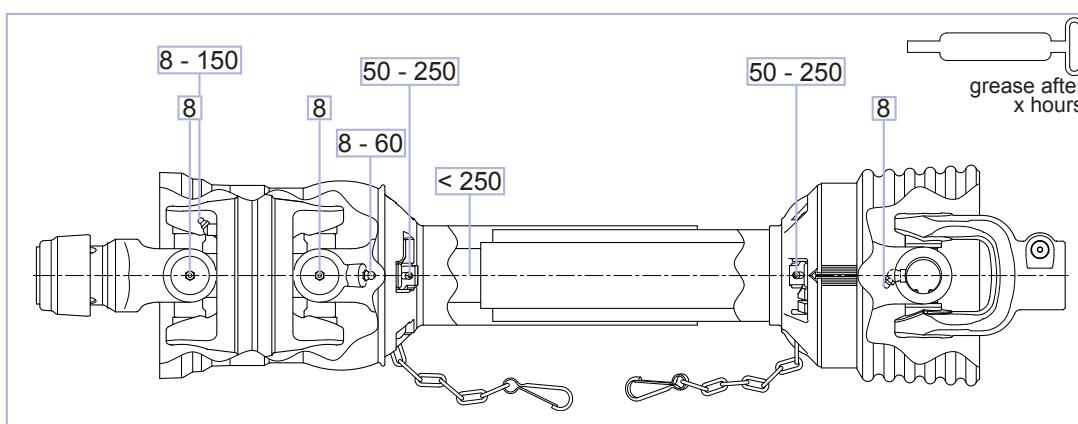


# Greasing Recommendations

Greasing recommendations\* 80° World Wide constant velocity PTO drive shaft with **E-Kits**:

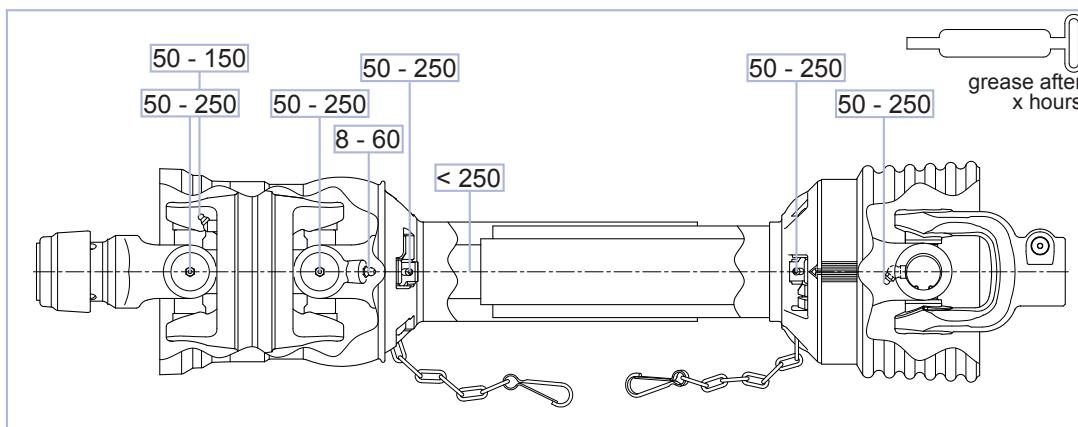

\* all greasing intervals are application dependent



Greasing recommendations\* 80° World Wide constant velocity PTO drive shaft with **Extended Lubrication**:

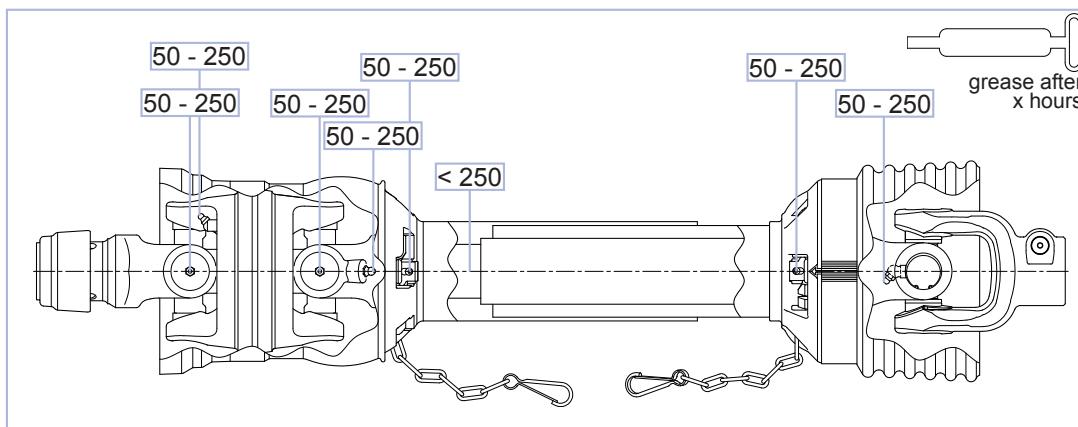


\* all greasing intervals are application dependent

Greasing recommendations\* cross & bearing kits:

P-Kits:

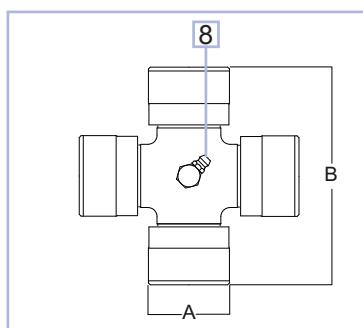

E-Kits:

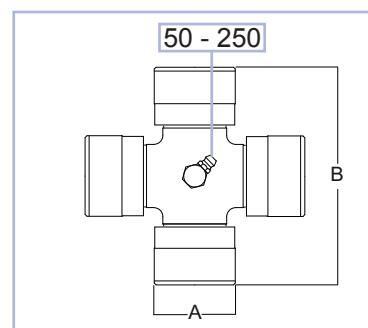


\* all greasing intervals are application dependent

## Greasing Recommendations


Greasing recommendations\* Safety Clutches:

Overrunning clutch:

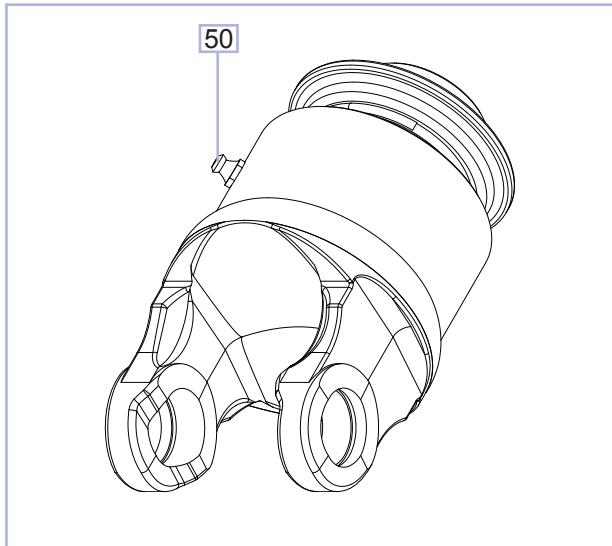


\* all greasing intervals are application dependent


Ratchet clutch:

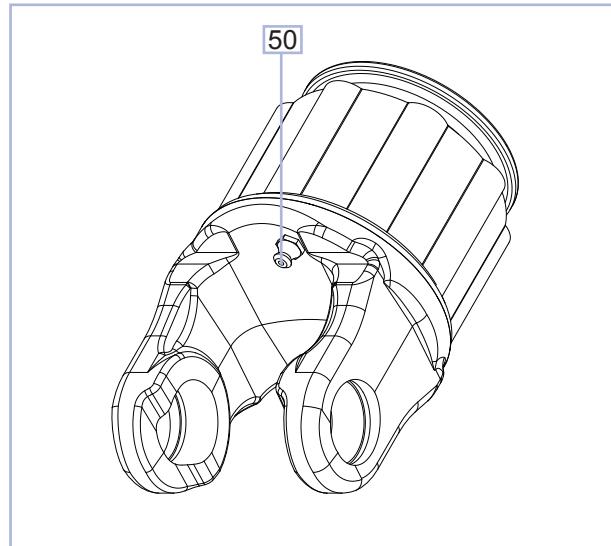

\* all greasing intervals are application dependent




Friction overrunning clutch:

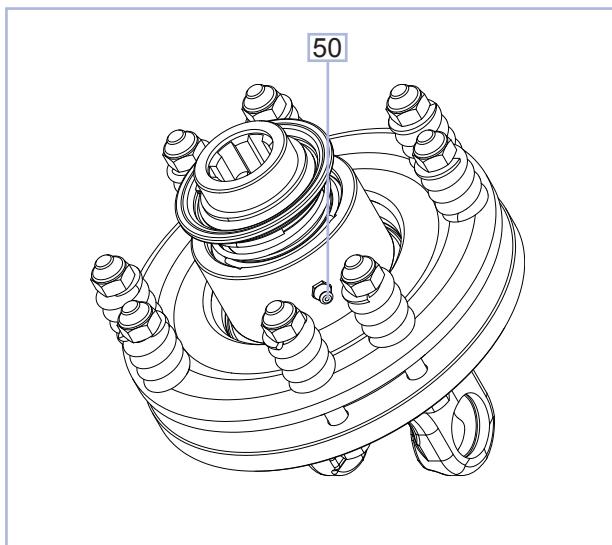

\* all greasing intervals are application dependent

Shear Bolt clutch:

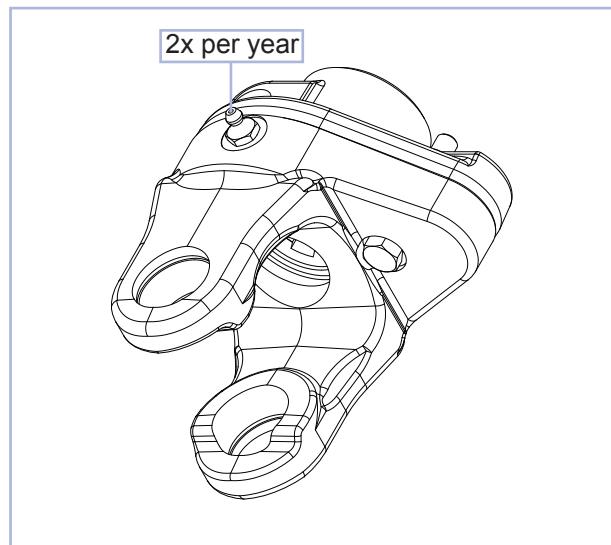

\* all greasing intervals are application dependent

Greasing

## **N O T E S**



Weasler®

# MERCHANDISERS

Merchandisers

# Merchandisers

## DISPLAY FOR PTO DRIVE SHAFTS

### *Display (excluding PTO drive shafts)*

Item Number	Description
12101027	Display for PTO drive shafts excluding PTO drive shafts



### *Display (including PTO drive shafts)*

Item Number	PTO drive shaft Number	Description
12101028		Display for PTO drive shafts including 8 PTO drive shafts (see below)
	1600-6100-086	PTO drive shaft, AB1-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1600-6400-086	PTO drive shaft, AB4-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1600-6600-101	PTO drive shaft, AB6-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 1010mm
	1600-7100-086	PTO drive shaft, AW10-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1600-7400-086	PTO drive shaft, AW21-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1600-7600-101	PTO drive shaft, AW35-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 1010mm
	1800-7601-101	80° World Wide Constant Velocity PTO drive shaft, AW35-series, 1 3/8-6 AL, 1 3/8-6 AL, Lz: 1010mm
	1811-7401-101	80° World Wide Constant Velocity PTO drive shaft, AW21-series, 1 3/8-6 AL, 1 3/8-6 AL, Lz: 1010mm, E-Kit

### *Display (including PTO drive shafts)*

Item Number	PTO drive shaft Number	Description
12101029		Display for PTO drive shafts including 8 PTO drive shafts (see below)
	1600-7100-086	PTO drive shaft, AW10-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1600-7400-086	PTO drive shaft, AW21-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1600-7600-101	PTO drive shaft, AW35-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 1010mm
	1610-7400-086 03	PTO drive shaft with friction clutch 900Nm, AW21-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 860mm
	1620-7400-101 03	PTO drive shaft with ratchet clutch 900Nm, AW21-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 1010mm
	1630-7400-101	PTO drive shaft with clockwise overrunning clutch, AW21-series, 1 3/8-6 QD, 1 3/8-6 QD, Lz: 1010mm
	1800-7601-101	80° World Wide Constant Velocity PTO drive shaft, AW35-series, 1 3/8-6 AL, 1 3/8-6 AL, Lz: 1010mm
	1811-7401-101	80° World Wide Constant Velocity PTO drive shaft, AW21-series, 1 3/8-6 AL, 1 3/8-6 AL, Lz: 1010mm, E-Kit

## TRANSPARENCY IDENTIFICATION SYSTEM



The individual transparency cards will allow the user to easily identify PTO drive shaft components. Cross and Bearing Kits may be identified by the bearing cap outside diameter and the width of the cross. Yokes may be identified by the hole in the ear and bore. Tubes and shafts may be identified by the end sections.

How to use the Transparency Identification System:

1. Match the part to be replaced with the corresponding transparency card for identification.
2. Select the proper stock number for the replacement part.

### *Transparency identification system*

Item Number	Description
12002500	Transparency identification system for PTO drive line components

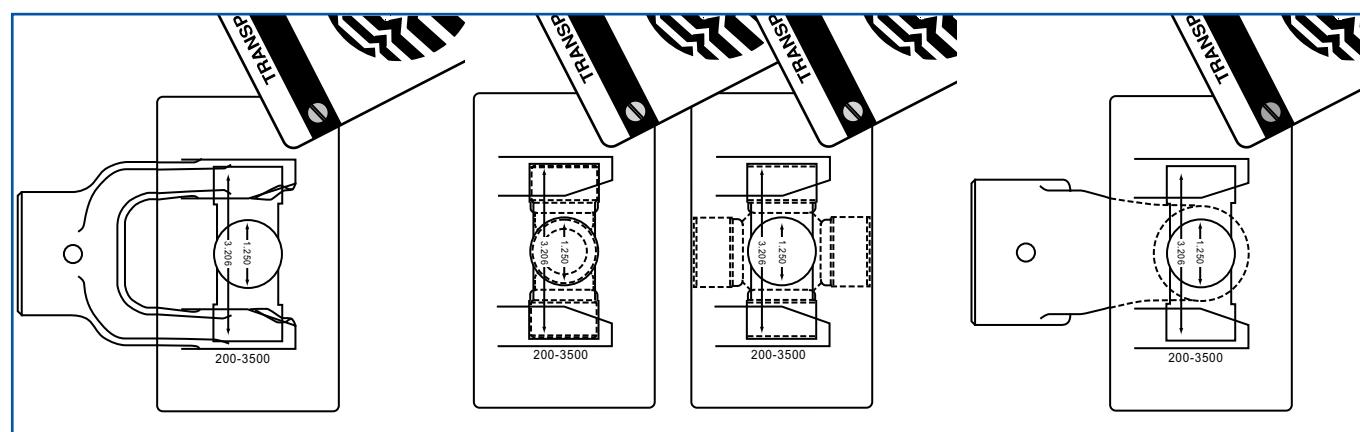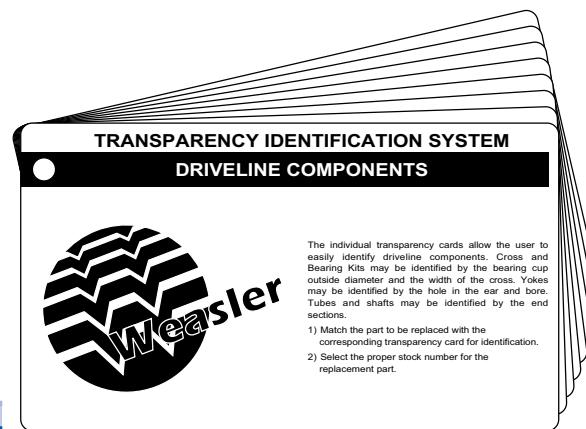

# Merchandisers


## PTO DRIVE SHAFT MARKING GAUGE

Tool for our customers to help identify Weasler PTO drive shaft series. By looking up the dimensions on the marking gauge, the customer will find the right Weasler series matching the dimensions of the part to be replaced. After that our customers can find the item numbers of the needed spare parts per series in the Weasler Aftermarket catalogue.


### *PTO drive shaft marking gauge*

Item Number	Description
12101040	PTO drive shaft marking gauge

#### Front:

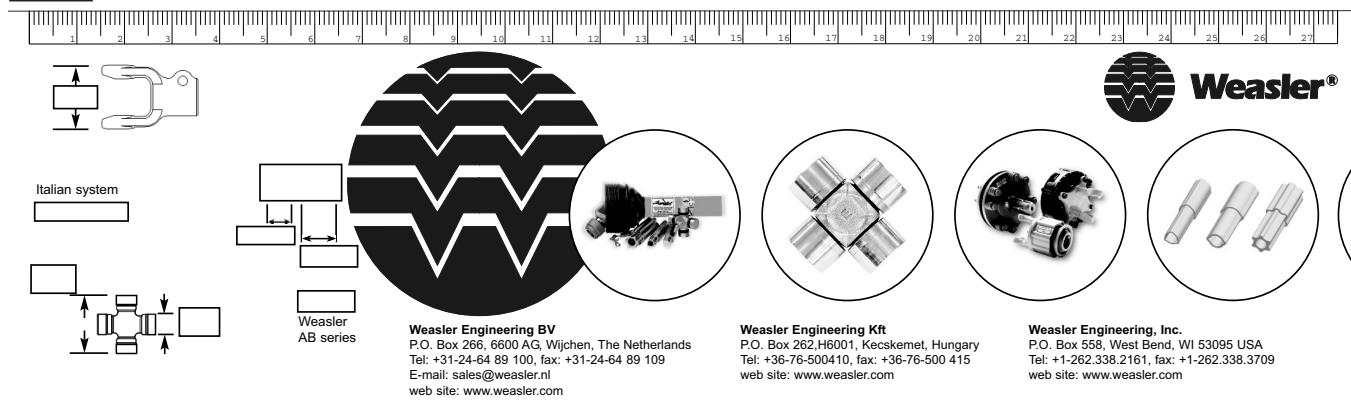

#### Back:

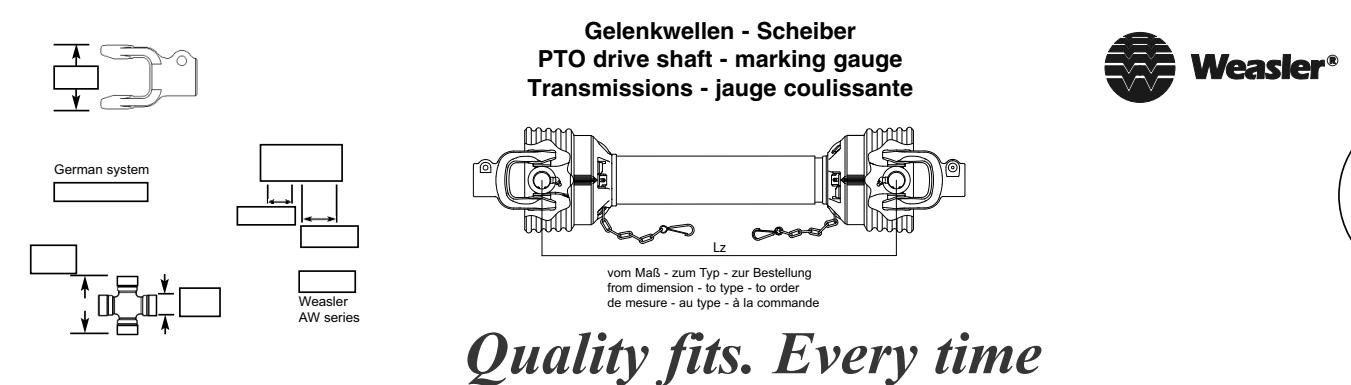




Weasler®

# AB-SERIES PTO DRIVE SHAFTS & COMPONENTS

AB-Series


## AB1 series

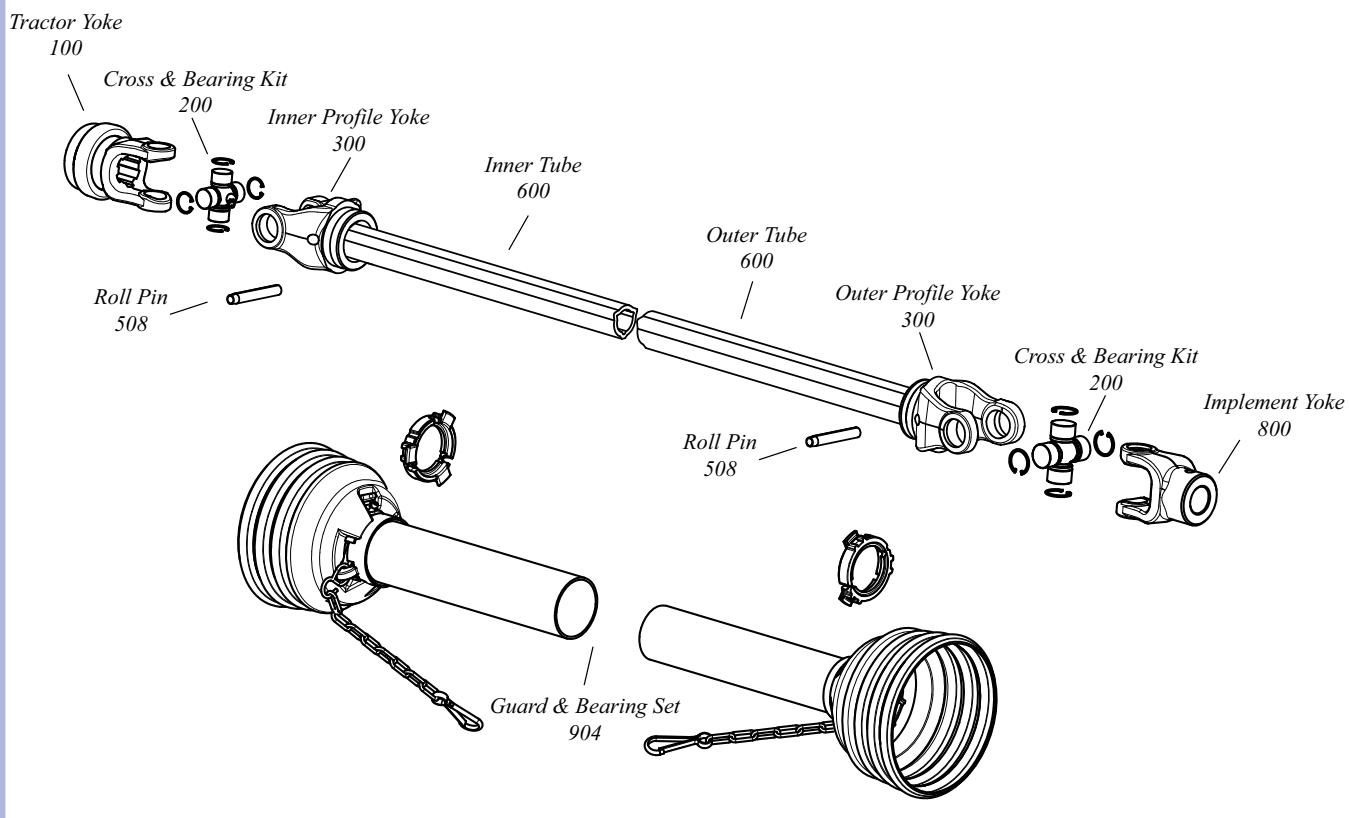

AB-Series


### Tractor Yoke

**Quick Disconnect Pin**

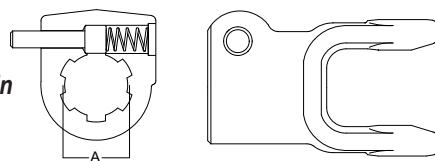


Item Number	Dim. "A" Bore
102-6106	1 3/8" x 6 Spl.
102-6118	1 1/8" x 6 Spl.
102-6121	1 3/8" x 21 Spl.
102-6125	21 x 25 x 6 Spl.

### Cross & Bearing Kit (P-Kit)




### Tractor Yoke

**Safety Slide Lock**


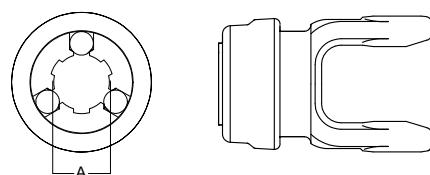


Item Number	Dim. "A" Bore
101-6106	1 3/8" x 6 Spl.

### Extended Lubrication Cross & Bearing Kit (E-Kit)





Item Number	Dim. "A"	Dim. "B"
	mm	mm
201-6154	22.0	54.0

**Inner Profile Yoke**

**Item  
Number**  
300-6126

**Dim. "A"  
mm**  
26


**Outer Profile Yoke**

**Item  
Number**  
300-6133

**Dim. "A"  
mm**  
33

**Inner Tube**

Dim. "A" 26.5mm  
Wall 3.4mm





**Item  
Number**  
610-2603-100  
610-2603-150  
610-2603-000

**Length  
m**  
1.0  
1.5  
3.0

**Implement Yoke**


**Round Bore**  
With Keyway & Set Screw



**Item  
Number**  
800-6120  
800-6125  
800-6130

**Dim. "A" Bore  
mm**  
20  
25  
30

**Standard Keyway  
mm**  
6  
8  
8

**Roll Pin**



**Item  
Number**  
508-0855

**Dim. "A"  
mm**  
8

**Dim. "B"  
mm**  
55

**Implement Yoke**

**Round Bore**  
With Pin Hole




**Item  
Number**  
830-6120  
830-6125

**Dim. "A" Bore  
mm**  
20  
25




**Outer Tube**

Dim. "A" 32.5mm  
Wall 2.5mm



**Item  
Number**  
610-3302-100  
610-3302-150  
610-3302-000

**Length  
m**  
1.0  
1.5  
3.0

**Universal Joint**


**Item  
Number**  
3001-6106-00  
3002-6106-00

**Quick Disconnect  
Dim. "A" Bore**  
1 3/8" x 6 Spl.  
1 3/8" x 6 Spl.

**Profile Yoke  
Dim. "B" mm**  
26 (inner)  
33 (outer)

## **AB1 series**

### **Guard (incl. Bearing Kit)**

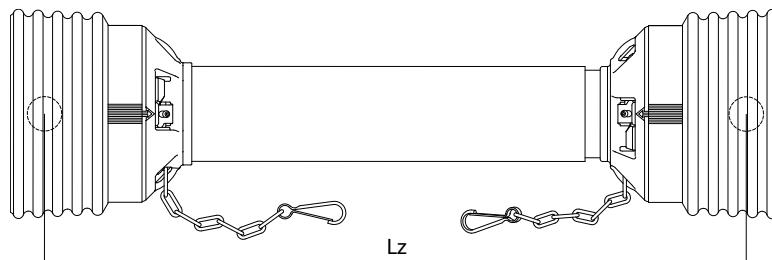

<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>
904-1000-046	460mm
904-1000-051	510mm
904-1000-056	560mm
904-1000-061	610mm
904-1000-071	710mm
904-1000-076	760mm
904-1000-081	810mm
904-1000-086	860mm
904-1000-101	1010mm
904-1000-121	1210mm


Assembly instructions guard, see page 7

### **Easy Lock Replacement Kit**




<b>Item Number</b>	<b>25-per Kit</b>
13021234	

### **PTO drive shaft**

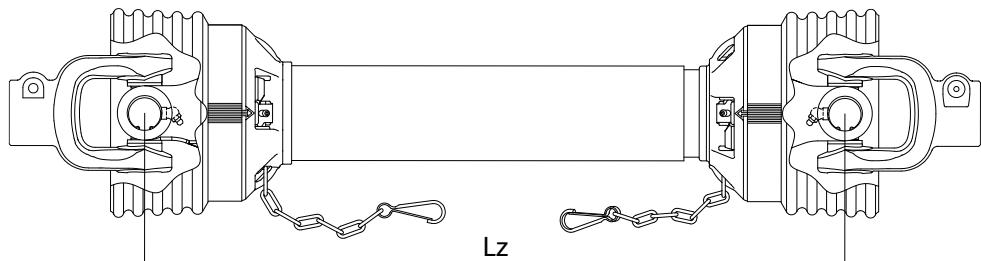


<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>	<b>Tractor Yoke</b>	<b>Implement Yoke</b>
1600-6100-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6100-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

**PTO drive shaft  
with Ratchet Clutch  
300Nm**

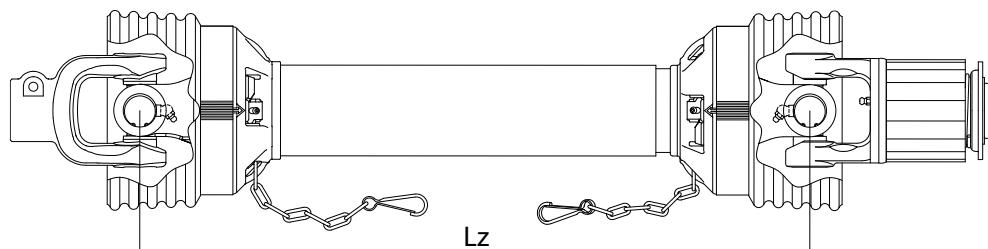


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6100-046 01	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-051 01	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-056 01	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-061 01	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-071 01	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-076 01	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-081 01	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-086 01	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-101 01	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6100-121 01	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300

**PTO drive shaft  
with Ratchet Clutch  
600Nm**

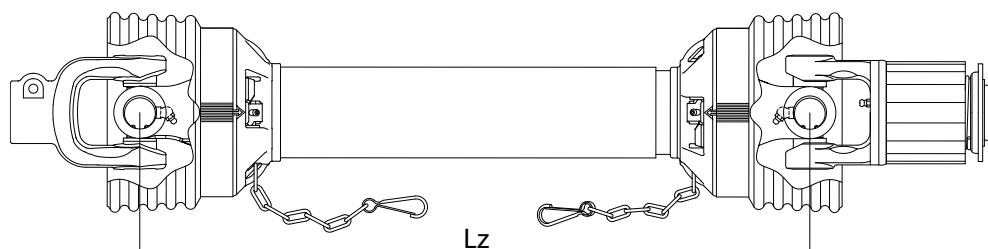

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6100-046 02	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-051 02	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-056 02	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-061 02	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-071 02	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-076 02	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-081 02	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-086 02	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-101 02	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6100-121 02	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600

## AB2 series

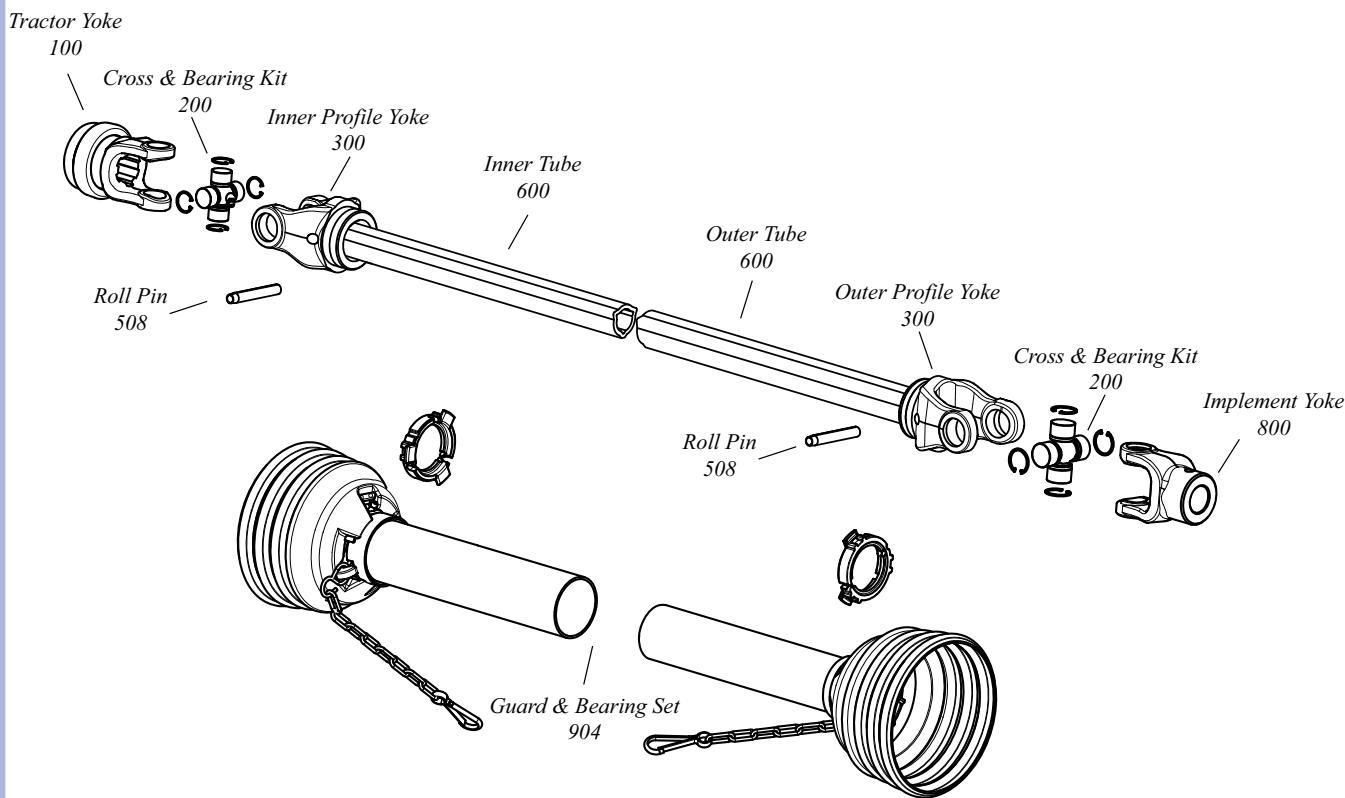


### Tractor Yoke




**Item  
Number**

	<b>Dim. "A" Bore</b>
102-8206	1 3/8" x 6 Spl.
102-8218	1 1/8" x 6 Spl.
102-8221	1 3/8" x 21 Spl.
102-8232	32 x 38 x 8 Spl.




### Cross & Bearing Kit (P-Kit)



**Item  
Number**


	<b>Dim. "A"</b> <b>mm</b>	<b>Dim. "B"</b> <b>mm</b>
200-8261	23.8	61.2

### Tractor Yoke

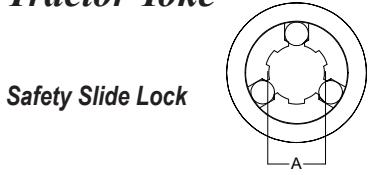


**Item  
Number**


	<b>Dim. "A" Bore</b>
101-8206	1 3/8" x 6 Spl.



### Extended Lubrication Cross & Bearing Kit (E-Kit)




### Tractor Yoke


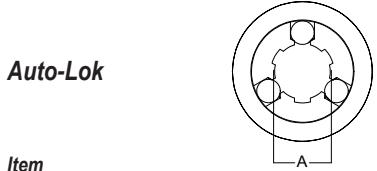


**Item  
Number**

	<b>Dim. "A" Bore</b>
110-8206	1 3/8" x 6 Spl.




<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>	<b>Dim. "B"</b> <b>mm</b>
201-8261	23.8	61.2

**AB2 series****Inner Profile Yoke**


Item Number	Dim. "A" mm
300-6229	29

**Inner Tube**

Dim. "A" 29.0mm  
Wall 4.1mm




Item Number	Length m
610-2904-100	1
610-2904-150	1.5
610-2904-000	3

**Roll Pin**



Item Number	Dim. "A" mm	Dim. "B" mm
508-0865	8	65

**Outer Tube**

Dim. "A" 36.0mm  
Wall 3.2mm





Item Number	Length m
610-3603-100	1
610-3603-150	1.5
610-3603-000	3

**Outer Profile Yoke**



Item Number	Dim. "A" mm
300-6236	36

**Implement Yoke****Round Bore**

With Keyway & Set Screw





Item Number	Dim. "A" Bore mm	Standard Keyway mm
800-8220	20	6
800-8225	25	8
800-8230	30	8

**Implement Yoke****Clamp Type interfering**

Item Number	Dim. "A" Bore
807-8206	1 3/8" x 6 Spl.

**Implement Yoke****Round Bore**



With Pin Hole



Item Number	Dim. "A" Bore mm
830-8225	25
830-8230	30

**Implement Yoke****Clamp Type**



non-interfering  
With Keyway & Set Screw



Item Number	Dim. "A" Bore mm	Standard Keyway mm
831-8225	25	8
831-8230	30	8

**Implement Yoke****interfering**


With Keyway & Set Screw



Item Number	Dim. "A" Bore mm	Standard Keyway mm
847-8225	25	8
847-8230	30	8


## AB2 series

### *Universal Joint*

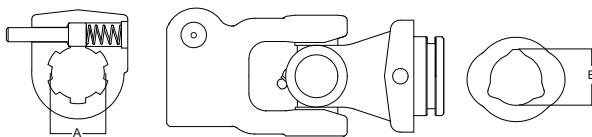

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-6206-00	1 3/8" x 6 Spl.	29 (inner)
3002-6206-00	1 3/8" x 6 Spl	36 (outer)

### *Guard (incl. Bearing Kit)*

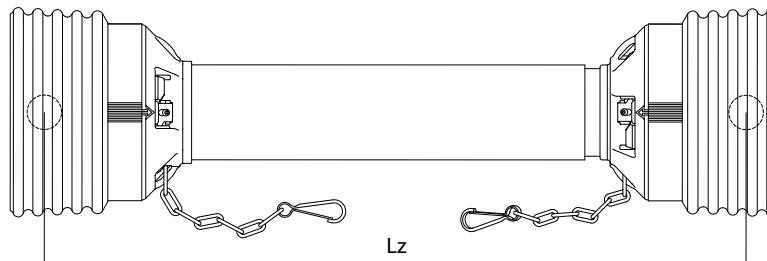

Item Number	Compressed Length (Lz) center cross - center cross
904-2500-046	460mm
904-2500-051	510mm
904-2500-056	560mm
904-2500-061	610mm
904-2500-071	710mm
904-2500-076	760mm
904-2500-081	810mm
904-2500-086	860mm
904-2500-101	1010mm
904-2500-121	1210mm
904-2500-136	1360mm


Assembly instructions guard, see page 7

### *Easy Lock Replacement Kit*



Item Number	25-per Kit
13001234	


### *PTO drive shaft*

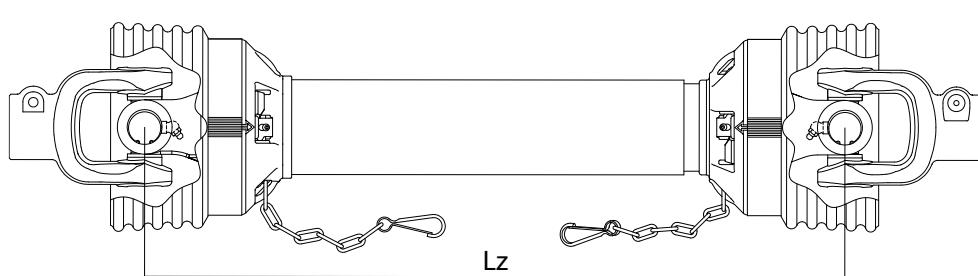

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-6200-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6200-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD


**AB2 series**

**PTO drive shaft  
with Overrunning Clutch  
Clockwise**

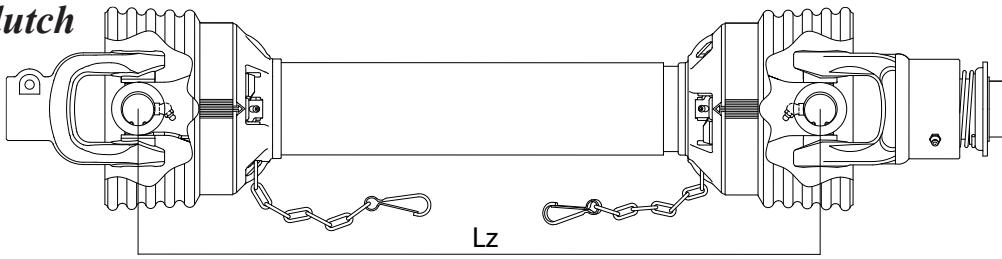


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-6200-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6200-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

**PTO drive shaft  
with Overrunning Clutch  
Counter Clockwise**

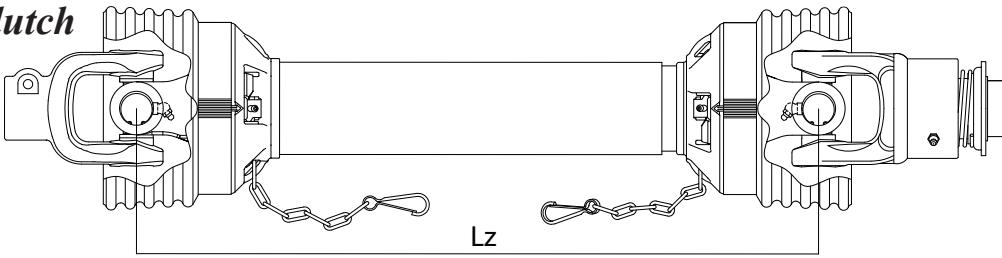

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1631-6200-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6200-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise


**PTO drive shaft  
with Ratchet Clutch  
300Nm**

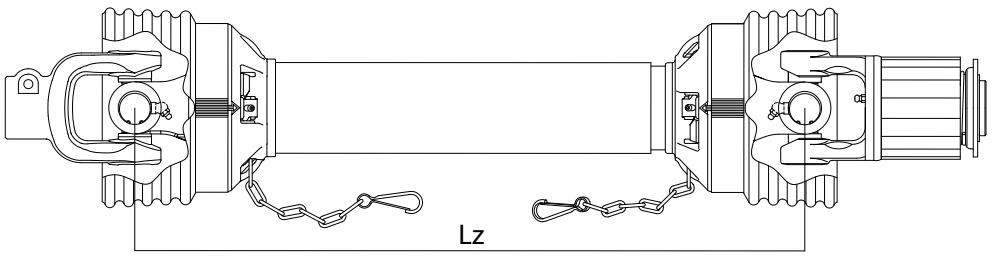

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6200-046 01	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-051 01	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-056 01	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-061 01	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-071 01	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-076 01	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-081 01	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-086 01	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-101 01	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-121 01	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-6200-136 01	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300


## AB2 series

**PTO drive shaft  
with Ratchet Clutch  
600Nm**

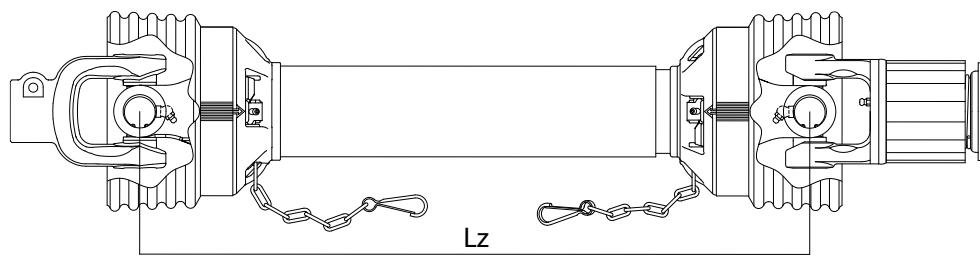


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6200-046 02	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-051 02	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-056 02	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-061 02	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-071 02	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-076 02	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-081 02	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-086 02	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-101 02	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-121 02	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6200-136 02	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600

**PTO drive shaft  
with Ratchet Clutch  
900Nm**


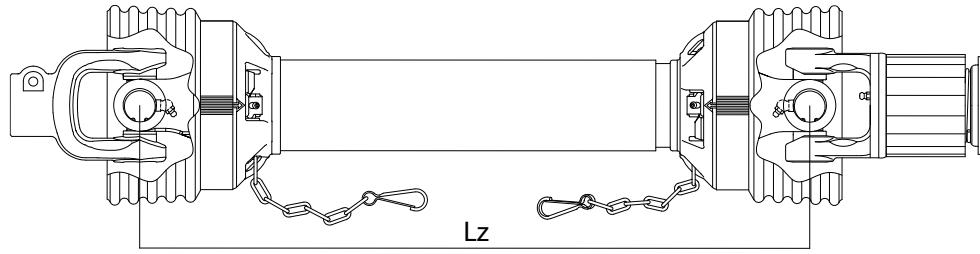


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6200-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6200-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900


**PTO drive shaft  
with Shear Bolt Clutch  
900Nm**

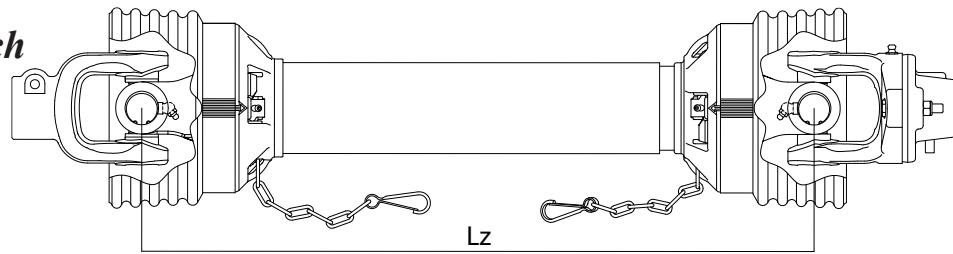


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-6200-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-6200-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900

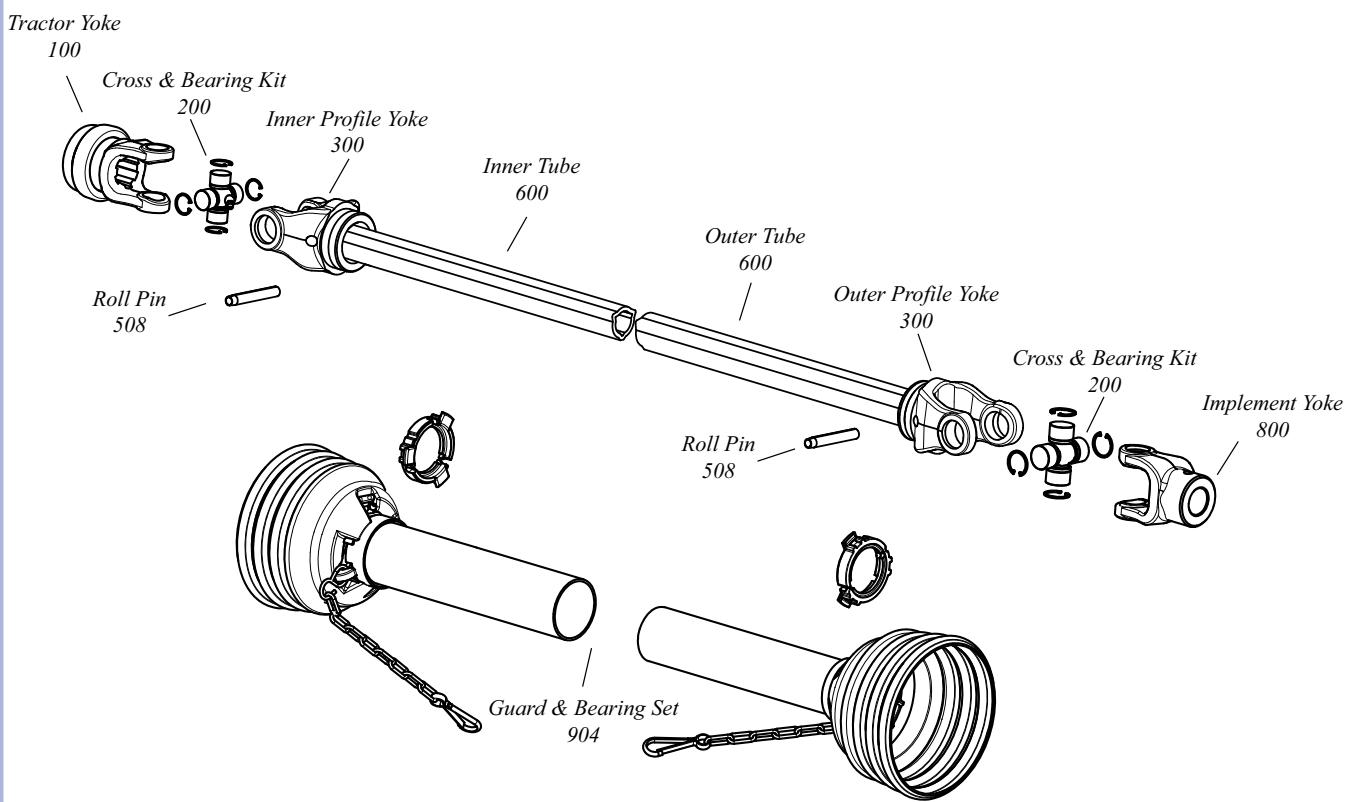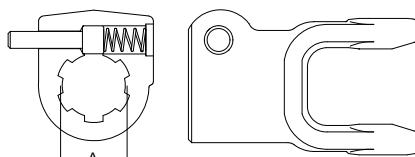**Tractor Yoke****Quick Disconnect Pin**


Item Number	Dim. "A" Bore
102-8306	1 3/8" x 6 Spl.
102-8321	1 3/8" x 21 Spl.

**Cross & Bearing Kit  
(P-Kit)**

Item Number	Dim. "A" mm	Dim. "B" mm
200-8370	27.0	70.0

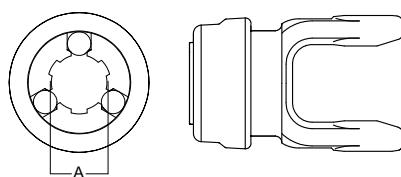**Tractor Yoke****Safety Slide Lock**


Item Number	Dim. "A" Bore
101-8306	1 3/8" x 6 Spl.

**Extended Lubrication  
Cross & Bearing Kit  
(E-Kit)**

Item Number	Dim. "A" mm	Dim. "B" mm
201-8370	27.0	70.0


## **AB3 series**

### **Inner Profile Yoke**



<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>
300-6336	36


### **Outer Profile Yoke**

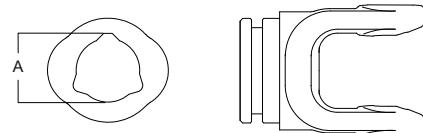

<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>
300-6343	43


### **Inner Tube**

Dim. "A" 36.0mm  
Wall 3.2mm



<b>Item Number</b>	<b>Length</b> <b>m</b>
610-3603-100	1
610-3603-150	1.5
610-3603-000	3


### **Implement Yoke**

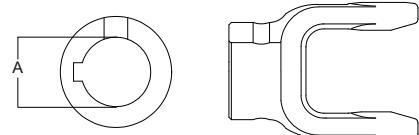

**Round Bore**  
With Keyway & Set Screw

<b>Item Number</b>	<b>Dim. "A" Bore</b> <b>mm</b>	<b>Standard Keyway</b> <b>mm</b>
800-8330	30	8
800-8335	35	10


### **Roll Pin**



<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>	<b>Dim. "B"</b> <b>mm</b>
508-0865	8	65


### **Outer Tube**

Dim. "A" 43.5mm  
Wall 3.4mm




<b>Item Number</b>	<b>Length</b> <b>m</b>
610-4303-100	1
610-4303-150	1.5
610-4303-000	3

### **Universal Joint**

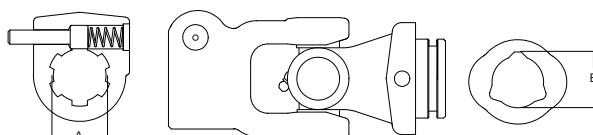

<b>Item Number</b>	<b>Quick Disconnect</b> <b>Dim. "A" Bore</b>	<b>Profile Yoke</b> <b>Dim. "B" mm</b>
3001-6306-00	1 3/8" x 6 Spl.	36 (inner)
3002-6306-00	1 3/8" x 6 Spl.	43 (outer)

## Guard (incl. Bearing Kit)

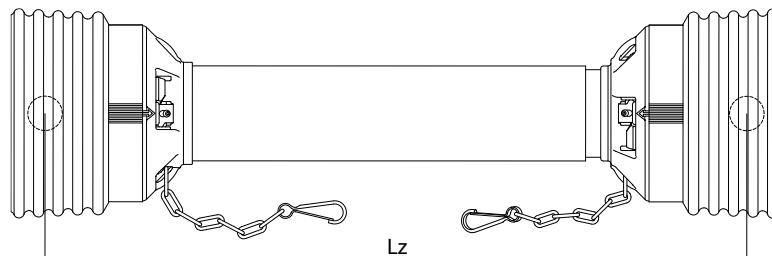
**Item  
Number**

	<b>Compressed Length (Lz) center cross - center cross</b>
904-2500-046	460mm
904-2500-051	510mm
904-2500-056	560mm
904-2500-061	610mm
904-2500-071	710mm
904-2500-076	760mm
904-2500-081	810mm
904-2500-086	860mm
904-2500-101	1010mm
904-2500-121	1210mm
904-2500-136	1360mm

Assembly instructions guard, see page 7


## Easy Lock Replacement Kit

**Item  
Number**

13001234	25-per Kit
----------	------------




## PTO drive shaft

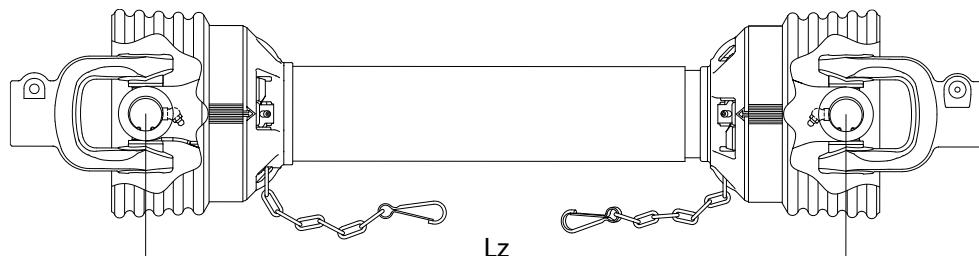

**Item  
Number**

	<b>Compressed Length (Lz) center cross - center cross</b>	<b>Tractor Yoke</b>	<b>Implement Yoke</b>
1600-6300-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6300-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

## AB4 series

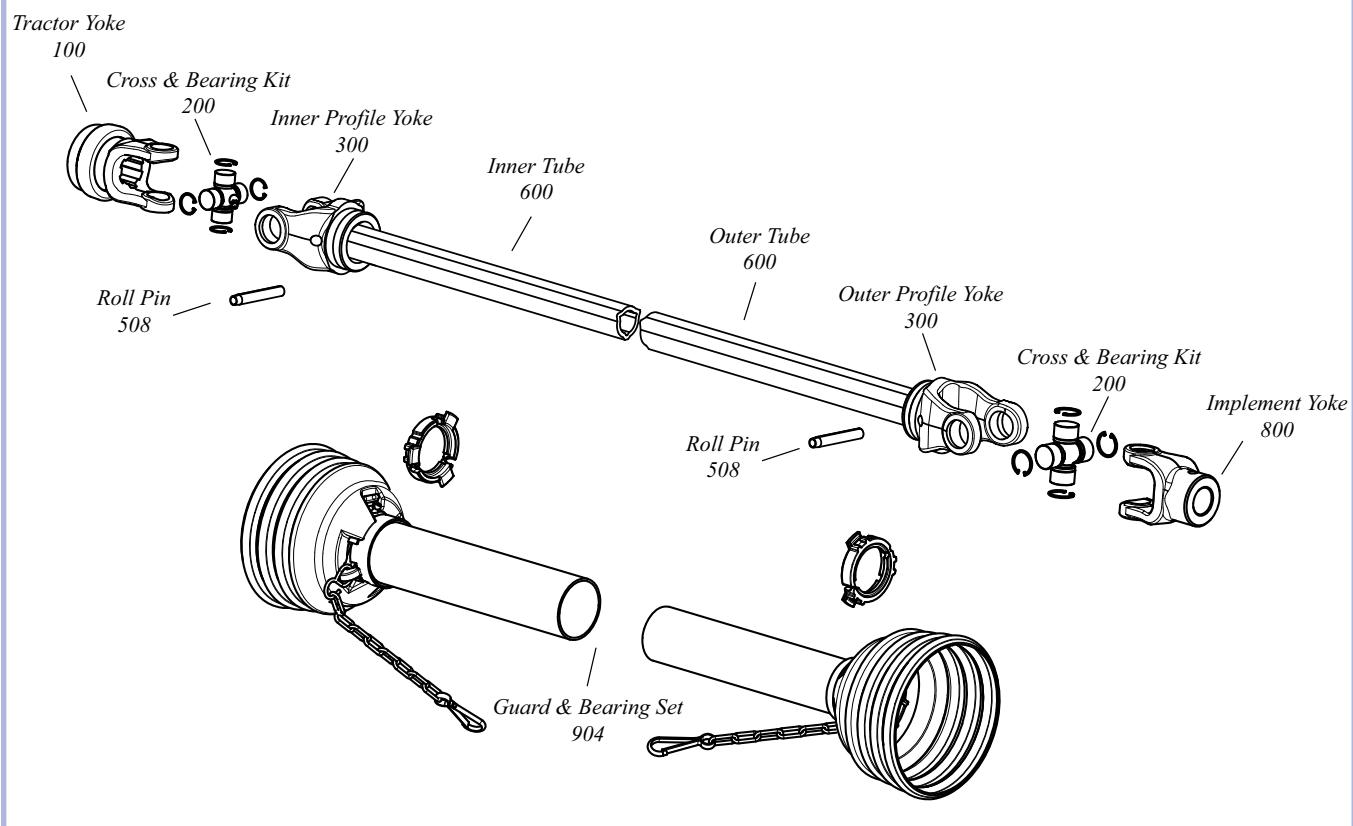


### Tractor Yoke

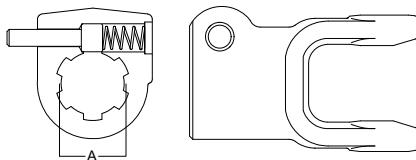

**Quick Disconnect Pin**

Item Number	Dim. "A" Bore
102-8406	1 3/8" x 6 Spl.
102-8418	1 1/8" x 6 Spl.
102-8421	1 3/8" x 21Spl.
102-8428	1 3/4" x 6 Spl.
102-8432	32 x 38 x 8 Spl.
102-8448	Hexagon 28


### Tractor Yoke

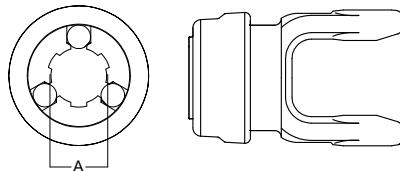

**Safety Slide Lock**

Item Number	Dim. "A" Bore
101-8406	1 3/8" x 6 Spl.
101-8421	1 3/8" x 21 Spl.


### Tractor Yoke

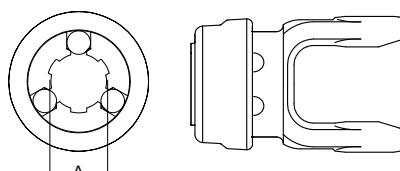

**Auto-Lok**


Item Number	Dim. "A" Bore
110-8406	1 3/8" x 6 Spl.
110-8421	1 3/8" x 21 Spl.

### Cross & Bearing Kit (P-Kit)





Item Number	Dim. "A" mm	Dim. "B" mm
200-8474	27.0	74.6

### Extended Lubrication Cross & Bearing Kit (E-Kit)



Item Number	Dim. "A" mm	Dim. "B" mm
201-8474	27.0	74.6



**AB4 series****Inner Profile Yoke**

**Item  
Number**  
300-6436

**Dim. "A"  
mm**  
36

**Inner Tube**

Dim. "A" 36.0mm  
Wall 4.0mm




**Item  
Number**  
610-3604-100  
610-3604-150  
610-3604-000

**Length  
m**  
1  
1.5  
3


**Outer Tube**

Dim. "A" 43.5mm  
Wall 3.4mm



**Item  
Number**  
610-4303-100  
610-4303-150  
610-4303-000



**Length  
m**  
1  
1.5  
3

**Roll Pin**

**Item  
Number**  
508-0865

**Dim. "A"  
mm**  
8

**Dim. "B"  
mm**  
65



**Outer Profile Yoke**

**Item  
Number**  
300-6443

**Dim. "A"  
mm**  
43

**Implement Yoke****Round Bore**



With Keyway & Set Screw



<b>Item Number</b>	<b>Dim. "A" Bore mm</b>	<b>Standard Keyway mm</b>
800-8425	25	8
800-8430	30	8
800-8435	35	10

**Implement Yoke****Clamp Type**



interfering



<b>Item Number</b>	<b>Dim. "A" Bore</b>
807-8406	1 3/8" x 6 Spl.

**Implement Yoke****Round Bore**



With Pin Hole



<b>Item Number</b>	<b>Dim. "A" Bore mm</b>
830-8425	25
830-8430	30
830-8435	35

**Implement Yoke****Clamp Type**

non-interfering





<b>Item Number</b>	<b>Dim. "A" Bore</b>
837-8406	1 3/8" x 6 Spl.

**Implement Yoke****Clamp Type**

non-interfering

With Keyway & Set Screw



<b>Item Number</b>	<b>Dim. "A" Bore mm</b>	<b>Standard Keyway mm</b>
831-8430	30	8
831-8435	35	10


# AB4 series

## Implement Yoke



**Clamp Type**

interfering


With Keyway & Set Screw

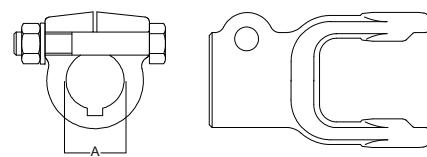

## Universal Joint

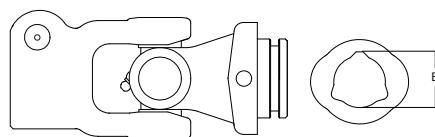

## Guard (incl. Bearing Kit)

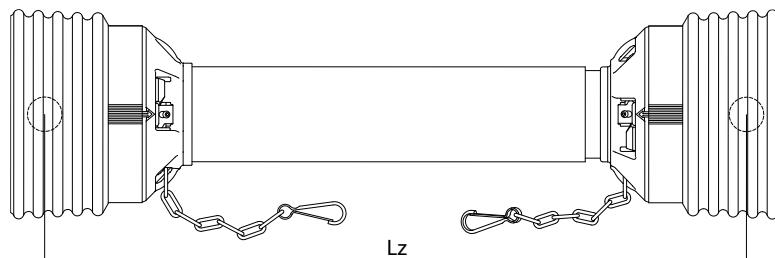

**Item  
Number**

904-2500-046	460mm
904-2500-051	510mm
904-2500-056	560mm
904-2500-061	610mm
904-2500-071	710mm
904-2500-076	760mm
904-2500-081	810mm
904-2500-086	860mm
904-2500-101	1010mm
904-2500-121	1210mm
904-2500-136	1360mm

**Compressed Length (Lz)  
center cross - center cross**

Assembly instructions guard, see page 7


## Easy Lock Replacement Kit

**Item  
Number**

13001234	25-per Kit
----------	------------



## PTO drive shaft

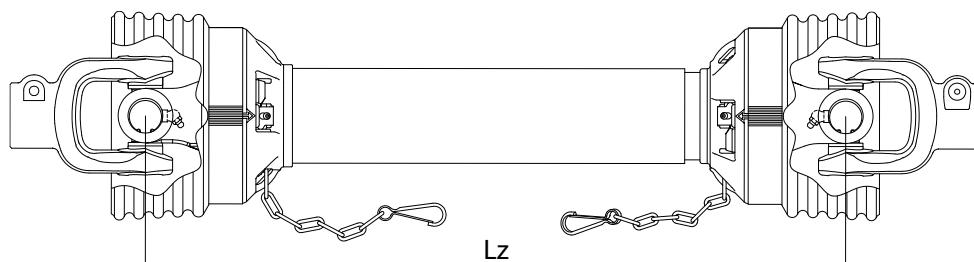

**Item  
Number**


1600-6400-046	460mm
1600-6400-051	510mm
1600-6400-056	560mm
1600-6400-061	610mm
1600-6400-071	710mm
1600-6400-076	760mm
1600-6400-081	810mm
1600-6400-086	860mm
1600-6400-101	1010mm
1600-6400-121	1210mm
1600-6400-136	1360mm

**Compressed Length (Lz)  
center cross - center cross**


**Tractor Yoke**

**Implement Yoke**

1600-6400-046	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-051	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-056	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-061	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-071	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-076	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-081	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-086	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-101	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-121	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6400-136	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

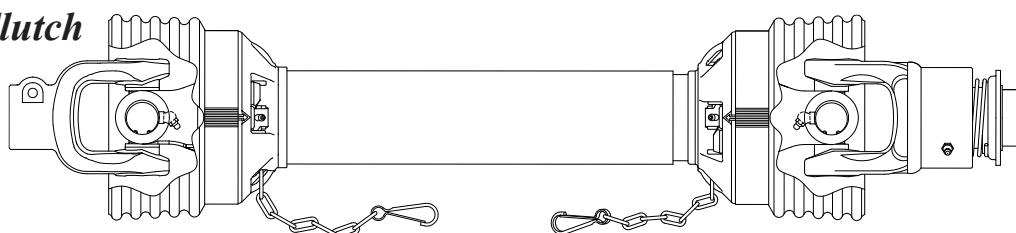**PTO drive shaft****with Overrunning Clutch****Clockwise**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-6400-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6400-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

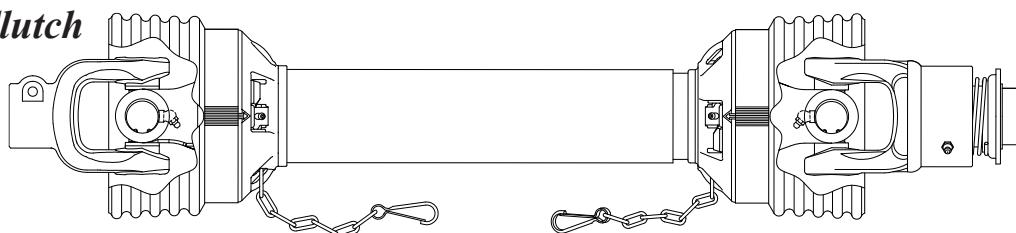**PTO drive shaft****with Overrunning Clutch****Counter Clockwise**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1631-6400-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6400-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise


## AB4 series

**PTO drive shaft  
with Ratchet Clutch  
600Nm**

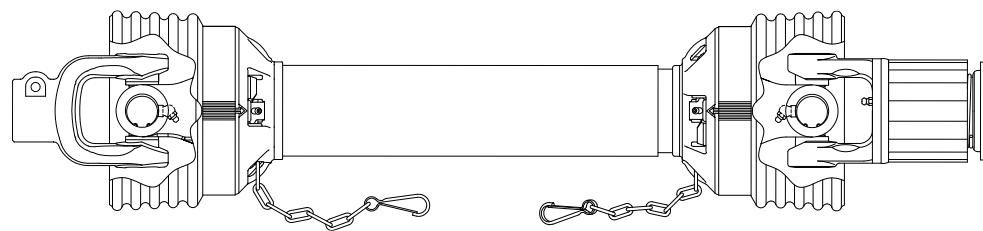


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6400-046 02	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-051 02	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-056 02	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-061 02	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-071 02	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-076 02	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-081 02	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-086 02	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-101 02	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-121 02	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-6400-136 02	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600

**PTO drive shaft  
with Ratchet Clutch  
900Nm**

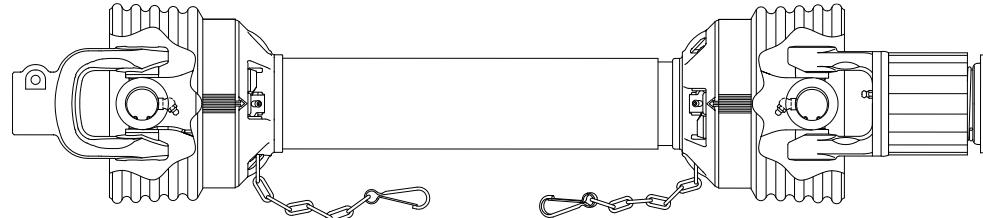


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6400-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6400-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900

**PTO drive shaft  
with Ratchet Clutch  
1200Nm**

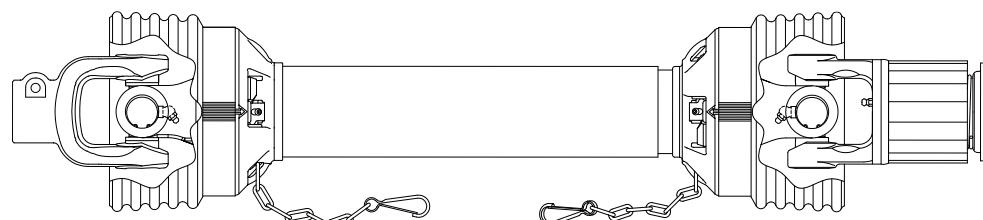


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6400-046 04	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-051 04	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-056 04	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-061 04	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-071 04	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-076 04	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-081 04	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-086 04	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-101 04	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-121 04	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6400-136 04	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200

**PTO drive shaft  
with Shear Bolt Clutch  
1600Nm**

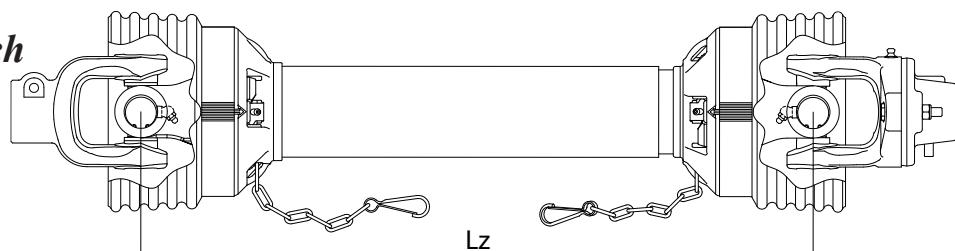

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-6400-046 18	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-051 18	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-056 18	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-061 18	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-071 18	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-076 18	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-081 18	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-086 18	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-101 18	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-121 18	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-6400-136 18	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600


**PTO drive shaft  
with Shear Bolt Clutch  
1860Nm**

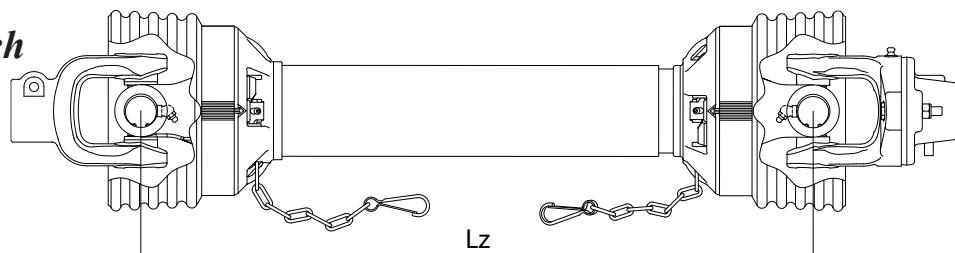

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-6400-046 19	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-051 19	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-056 19	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-061 19	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-071 19	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-076 19	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-081 19	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-086 19	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-101 19	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-121 19	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-6400-136 19	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860


## AB4 series

**PTO drive shaft  
with Friction Clutch  
900Nm**

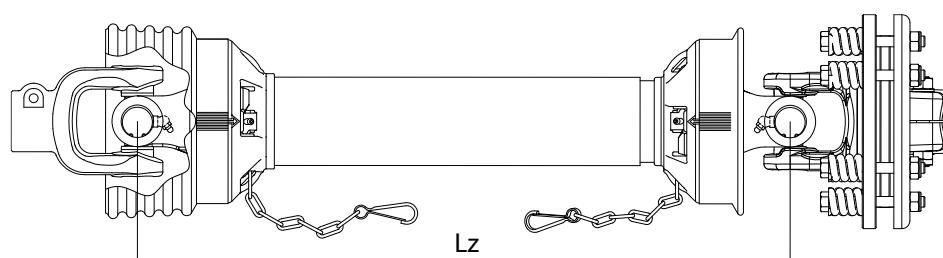


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-6400-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-6400-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900

**PTO drive shaft  
with Overrunning  
Friction Clutch  
750Nm**


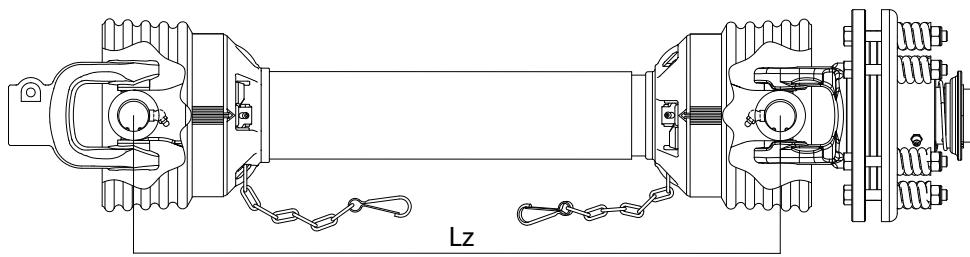


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-6400-046 06	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-051 06	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-056 06	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-061 06	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-071 06	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-076 06	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-081 06	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-086 06	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-101 06	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-121 06	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-6400-136 06	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750


**PTO drive shaft  
with Overrunning  
Friction Clutch  
1250Nm**

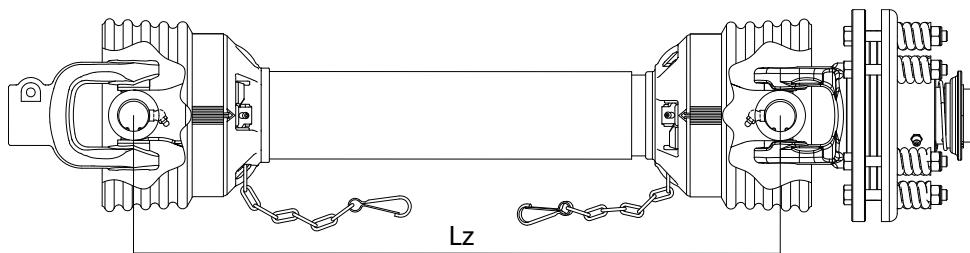


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-6400-046 07	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-051 07	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-056 07	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-061 07	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-071 07	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-076 07	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-081 07	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-086 07	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-101 07	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-121 07	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6400-136 07	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250

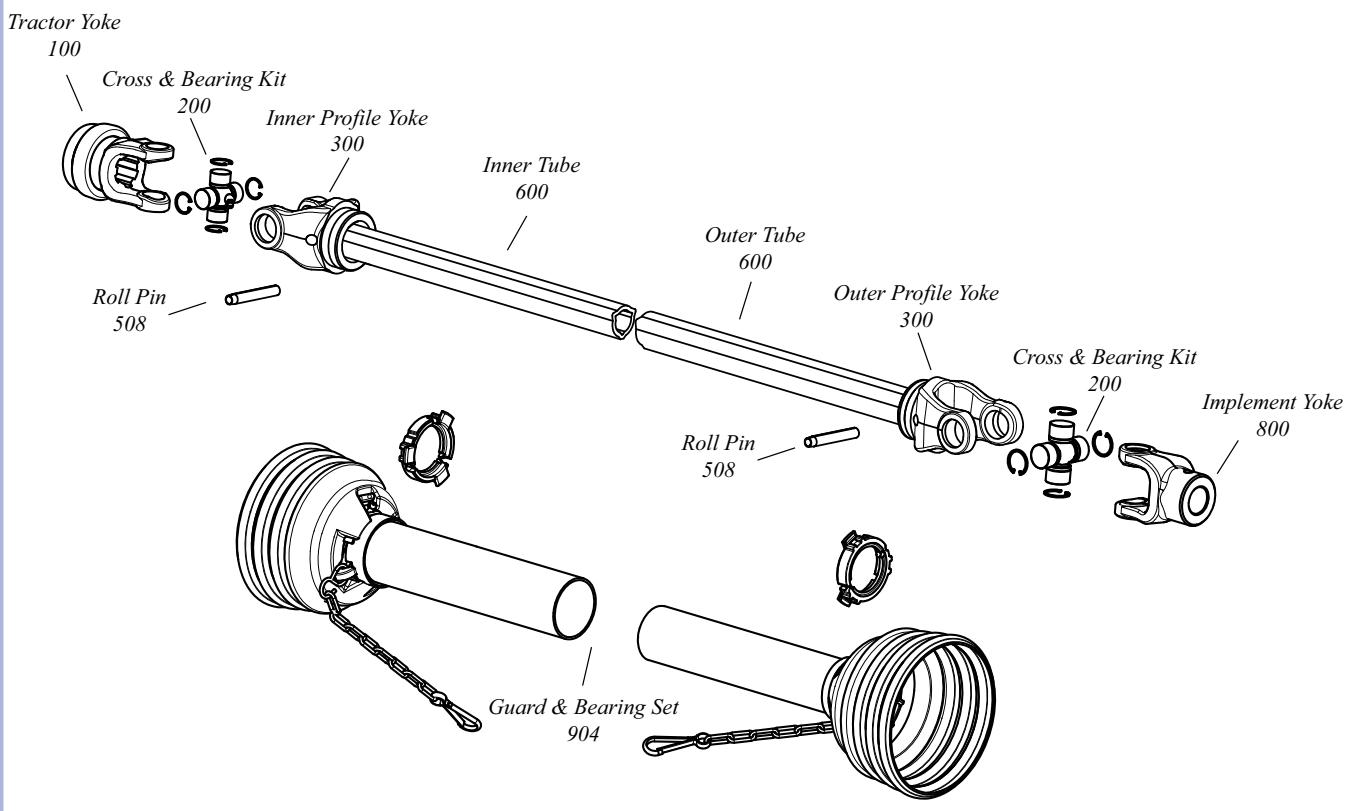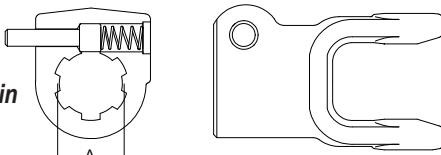**Tractor Yoke****Quick Disconnect Pin**


Item Number	Dim. "A" Bore
102-6506	1 3/8" x 6 Spl.
102-6520	1 3/4" x 20 Spl.
102-6521	1 3/8" x 21Spl.
102-6528	1 3/4" x 6 Spl.

**Cross & Bearing Kit  
(P-Kit)**


Item Number	Dim. "A"	Dim. "B"
200-6580	mm 30.2	mm 79.4

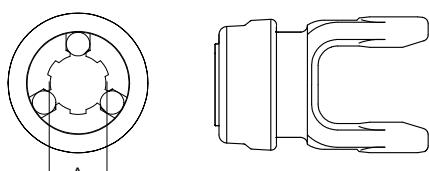**Tractor Yoke****Safety Slide Lock**

Item Number	Dim. "A" Bore
101-6506	1 3/8" x 6 Spl.
101-6521	1 3/8" x 21 Spl.

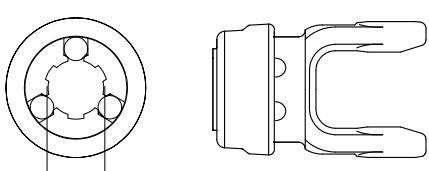**Tractor Yoke****Auto-Lok**


Item Number	Dim. "A" Bore
110-6506	1 3/8" x 6 Spl.

**Extended Lubrication  
Cross & Bearing Kit  
(E-Kit)**

Item Number	Dim. "A"	Dim. "B"
201-6580	mm 30.2	mm 79.4


# AB5 series

## Inner Profile Yoke



Item Number	Dim. "A" mm
300-6545	45

## Outer Profile Yoke

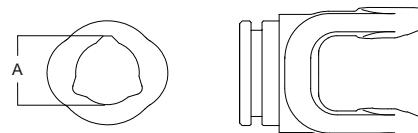

Item Number	Dim. "A" mm
300-6552	52

## Inner Tube

Dim. "A" 45.0mm Wall 4.0mm	
Item Number	Length m
610-4504-100	1.0
610-4504-150	1.5
610-4504-000	3.0

## Implement Yoke

Round Bore With Keyway & Set Screw	Item Number	Dim. "A" Bore mm	Standard Keyway mm
	800-6535	35	10

## Roll Pin

Item Number	Dim. "A" mm	Dim. "B" mm
508-1085	10	85

## Implement Yoke

Clamp Type	Item Number	Dim. "A" Bore
interfering	807-6506	1 3/8" x 6 Spl.


## Outer Tube

Dim. "A" 51.5mm Wall 3.0mm	
Item Number	Length m
610-5203-100	1.0
610-5203-150	1.5
610-5203-000	3.0

## Universal Joint

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-6506-00	1 3/8" x 6 Spl.	45 (inner)
3002-6506-00	1 3/8" x 6 Spl.	52 (outer)

## Guard (incl. Bearing Kit)

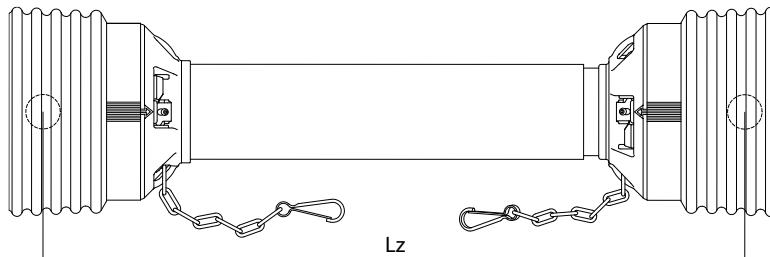

Item Number	Compressed Length (Lz) center cross - center cross
904-3500-046	460mm
904-3500-051	510mm
904-3500-056	560mm
904-3500-061	610mm
904-3500-071	710mm
904-3500-076	760mm
904-3500-081	810mm
904-3500-086	860mm
904-3500-101	1010mm
904-3500-121	1210mm
904-3500-136	1360mm


Assembly instructions guard, see page 7

## Easy Lock Replacement Kit




Item Number	
13001234	25-per Kit

## PTO drive shaft

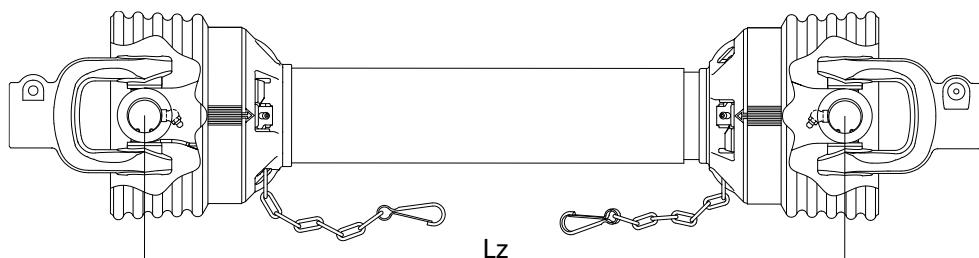


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-6500-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6500-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

## AB6 series

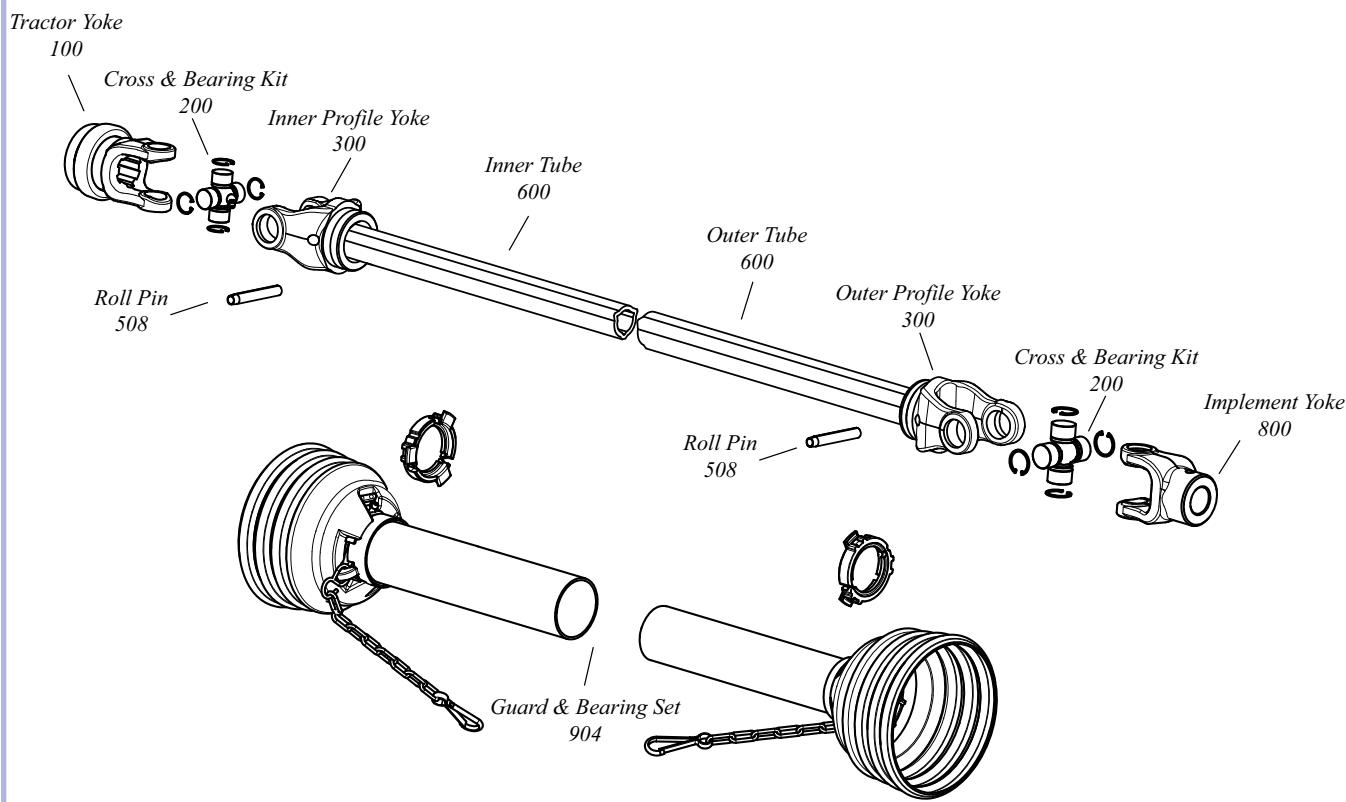

### Tractor Yoke


**Quick Disconnect Pin**

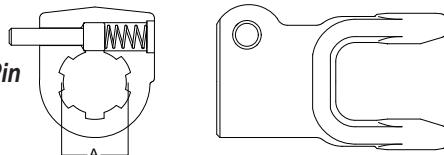

**Item  
Number**

	<b>Dim. "A" Bore</b>
102-8606	1 3/8" x 6 Spl.
102-8620	1 3/4" x 20 Spl.
102-8621	1 3/8" x 21 Spl.
102-8628	1 3/4" x 6 Spl.
102-8632	32 x 38 x 8 Spl.

### Cross & Bearing Kit (P-Kit)




**Item  
Number**

<b>Dim. "A"</b>	<b>Dim. "B"</b>
<b>mm</b>	<b>mm</b>
200-8692	30.2
	92.0

### Tractor Yoke

**Safety Slide Lock**

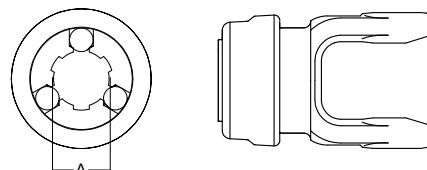


**Item  
Number**

	<b>Dim. "A" Bore</b>
101-8606	1 3/8" x 6 Spl.
101-8620	1 3/4" x 20 Spl.
101-8621	1 3/8" x 21 Spl.

### Tractor Yoke


**Auto-Lok**

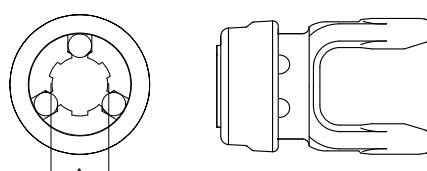

**Item  
Number**


	<b>Dim. "A" Bore</b>
110-8606	1 3/8" x 6 Spl.
110-8620	1 3/4" x 20 Spl.
110-8628	1 3/4" x 6 Spl.

### Extended Lubrication Cross & Bearing Kit (E-Kit)




**Item  
Number**


<b>Dim. "A"</b>	<b>Dim. "B"</b>
<b>mm</b>	<b>mm</b>
201-8692	30.2
	92.0

**Inner Profile Yoke**


<b>Item Number</b>	<b>Dim. "A" mm</b>
300-6645	45

**Outer Profile Yoke**

<b>Item Number</b>	<b>Dim. "A" mm</b>
300-6654	54

**Inner Tube**


<b>Item Number</b>	<b>Length m</b>
610-4504-100	1.0
610-4504-150	1.5
610-4504-000	3.0

**Implement Yoke**


<b>Item Number</b>	<b>Dim. "A" Bore mm</b>	<b>Standard Keyway mm</b>
800-8635	35	10

**Roll Pin**


<b>Item Number</b>	<b>Dim. "A" mm</b>	<b>Dim. "B" mm</b>
508-1080	10	80

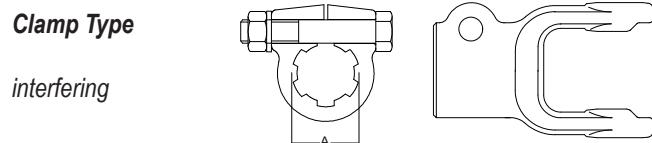**Implement Yoke**

<b>Item Number</b>	<b>Dim. "A" Bore</b>
807-8606	1 3/8" x 6 Spl.
807-8620	1 3/4" x 20 Spl.

**Outer Tube**

<b>Item Number</b>	<b>Length m</b>
610-5404-100	1.0
610-5404-150	1.5
610-5404-000	3.0

**Implement Yoke**

<b>Item Number</b>	<b>Dim. "A" Bore mm</b>
830-8635	35

# AB6 series



## Implement Yoke

## Universal Joint

### Clamp Type

interfering


With Keyway & Set Screw

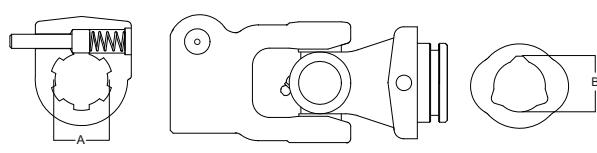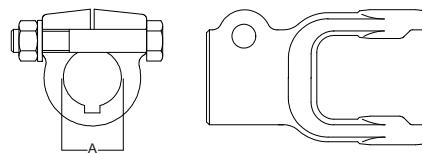

Item Number	Dim. "A" Bore mm	Standard Keyway mm
847-8635	35	10
847-8640	40	12

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-6606-00	1 3/8" x 6 Spl.	45 (inner)
3002-6606-00	1 3/8" x 6 Spl	54 (outer)

## Guard (incl. Bearing Kit)

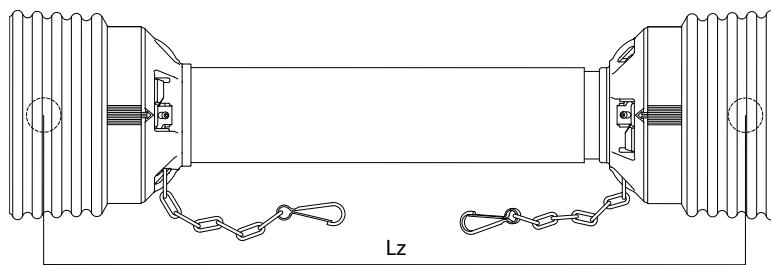

Item Number	Compressed Length (Lz) center cross - center cross
904-3500-046	460mm
904-3500-051	510mm
904-3500-056	560mm
904-3500-061	610mm
904-3500-071	710mm
904-3500-076	760mm
904-3500-081	810mm
904-3500-086	860mm
904-3500-101	1010mm
904-3500-121	1210mm
904-3500-136	1360mm


Assembly instructions guard, see page 7

## Easy Lock Replacement Kit




Item Number	25-per Kit
13001234	


## PTO drive shaft

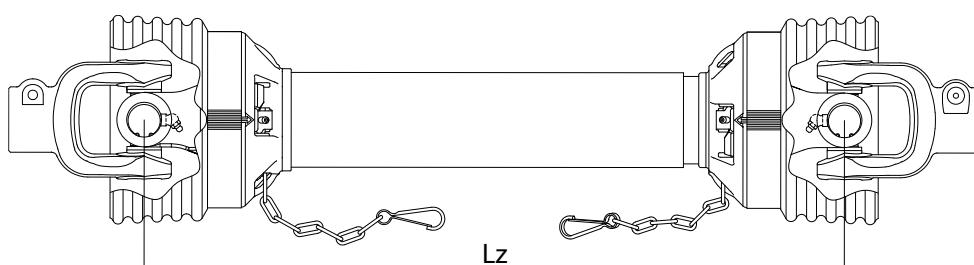

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-6600-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6600-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

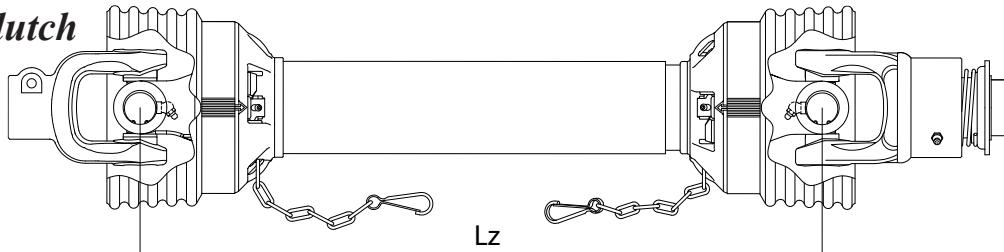**PTO drive shaft****with Overrunning Clutch  
Clockwise**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-6600-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6600-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

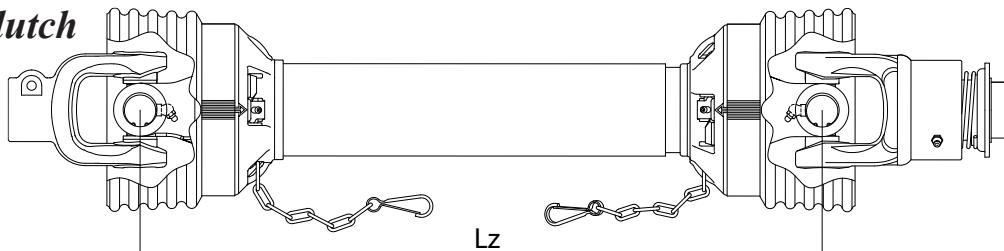**PTO drive shaft****with Overrunning Clutch  
Counter Clockwise**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1631-6600-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-6600-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise


## AB6 series

**PTO drive shaft  
with Ratchet Clutch  
900Nm**

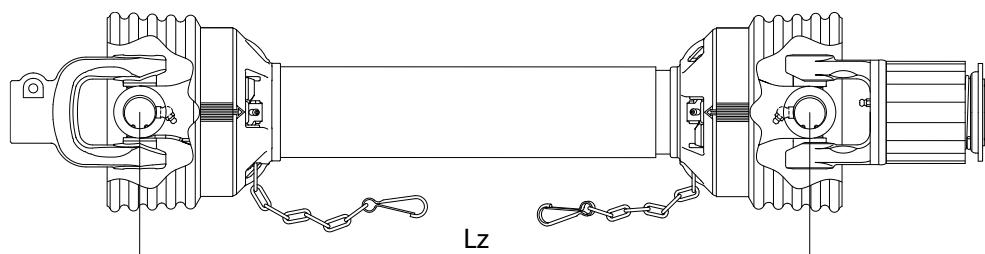


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6600-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-6600-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900

**PTO drive shaft  
with Ratchet Clutch  
1200Nm**

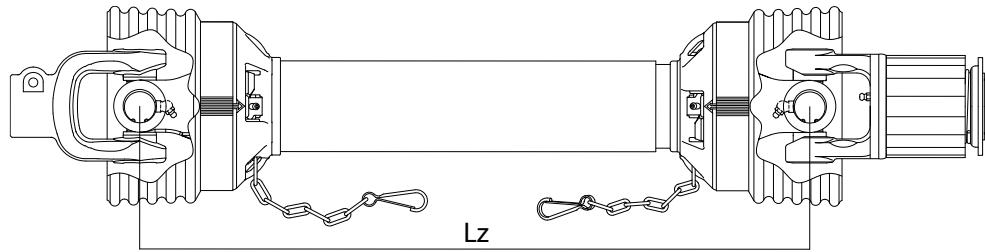


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6600-046 04	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-051 04	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-056 04	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-061 04	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-071 04	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-076 04	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-081 04	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-086 04	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-101 04	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-121 04	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-6600-136 04	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200

**PTO drive shaft  
with Ratchet Clutch  
1500Nm**

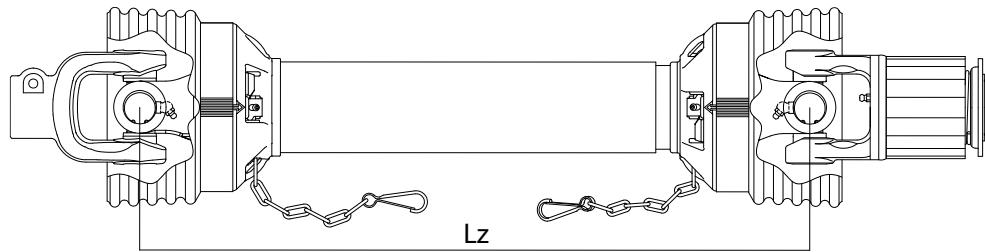


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-6600-046 05	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-051 05	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-056 05	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-061 05	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-071 05	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-076 05	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-081 05	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-086 05	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-101 05	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-121 05	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-6600-136 05	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500

**PTO drive shaft  
with Shear Bolt Clutch  
2920Nm**

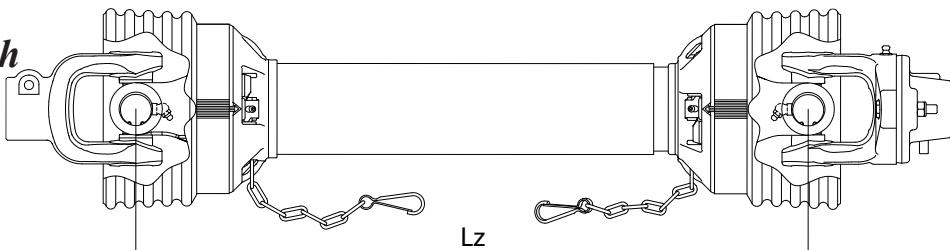

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-6600-046 22	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-051 22	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-056 22	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-061 22	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-071 22	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-076 22	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-081 22	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-086 22	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-101 22	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-121 22	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-6600-136 22	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920


**PTO drive shaft  
with Friction Clutch  
1250Nm**

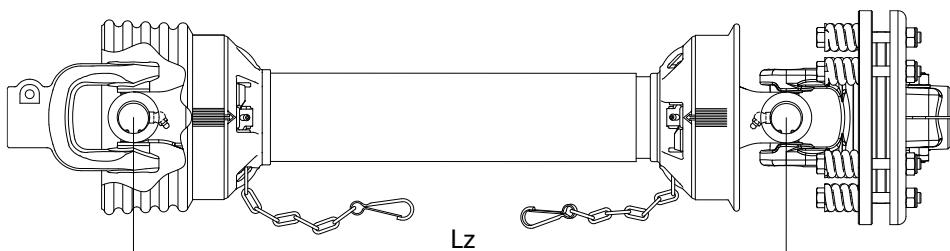

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-6653-046 07	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-051 07	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-056 07	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-061 07	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-071 07	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-076 07	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-081 07	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-086 07	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-101 07	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-121 07	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-6653-136 07	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250


## AB6 series

**PTO drive shaft  
with Friction Clutch  
1500Nm**

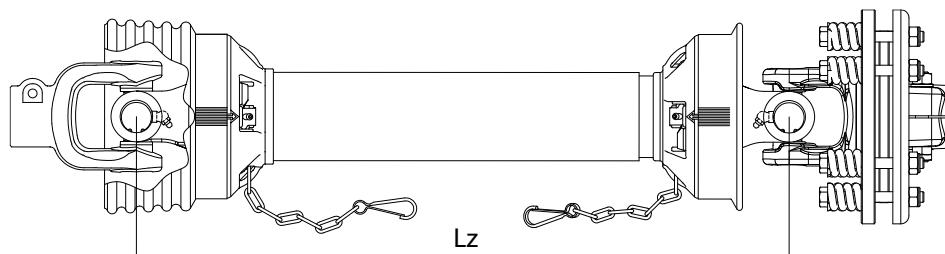




Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-6653-046 05	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-051 05	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-056 05	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-061 05	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-071 05	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-076 05	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-081 05	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-086 05	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-101 05	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-121 05	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-6653-136 05	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500

**PTO drive shaft  
with Friction  
Overrunning Clutch  
1250Nm**

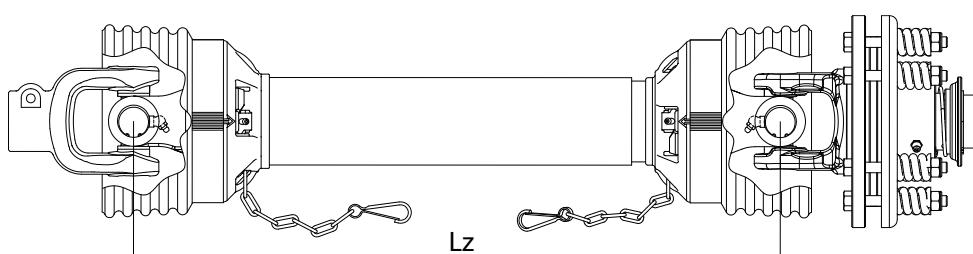




Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-6600-046 07	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-051 07	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-056 07	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-061 07	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-071 07	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-076 07	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-081 07	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-086 07	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-101 07	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-121 07	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-6600-136 07	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250

## AB7N series

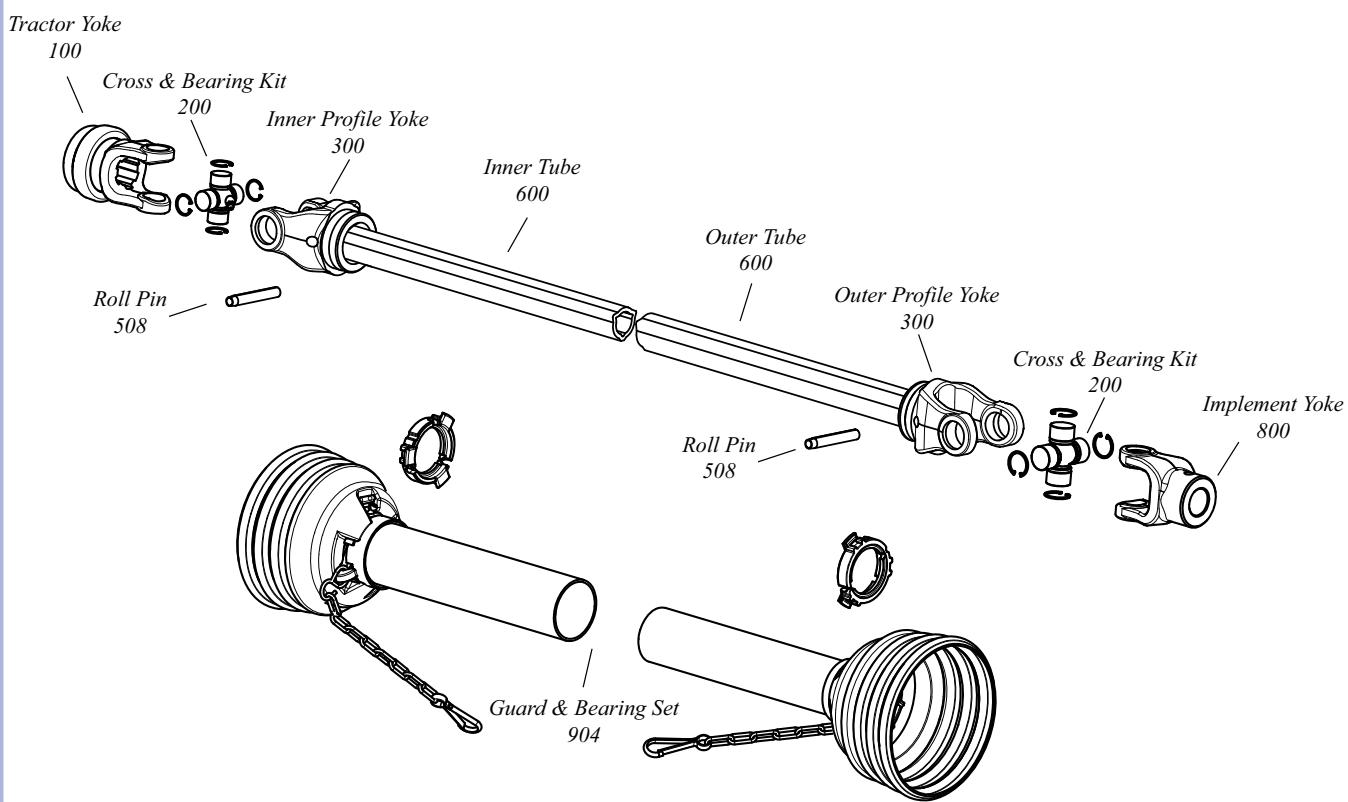**Tractor Yoke****Quick Disconnect Pin**



Item Number	Dim. "A" Bore
102-6706	1 3/8" x 6 Spl.
102-6720	1 3/4" x 20 Spl.
102-6721	1 3/8" x 21 Spl.
102-6728	1 3/4" x 6 Spl.

Item Number	Dim. "A"	Dim. "B"
200-6794	34.9	94.0


**Cross & Bearing Kit (P-Kit)****Tractor Yoke****Safety Slide Lock**

Item Number	Dim. "A" Bore
101-6706	1 3/8" x 6 Spl.
101-6720	1 3/4" x 20 Spl.
101-6721	1 3/8" x 21 Spl.

Item Number	Dim. "A"	Dim. "B"
201-6794	34.9	94.0

**Tractor Yoke****Auto-Lok**


Item Number	Dim. "A" Bore
110-6706	1 3/8" x 6 Spl.
110-6728	1 3/4" x 6 Spl.

**Extended Lubrication Cross & Bearing Kit (E-Kit)**

Item Number	Dim. "A"	Dim. "B"
201-6794	34.9	94.0


## AB7N series

### Inner Profile Yoke

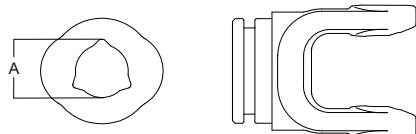


Item Number	Dim. "A" mm
300-6745	45

### Outer Profile Yoke

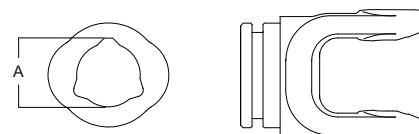


Item Number	Dim. "A" mm
300-6754	54

### Inner Tube



Item Number	Length m
610-4505-100	1.0
610-4505-150	1.5
610-4505-000	3.0

### Implement Yoke

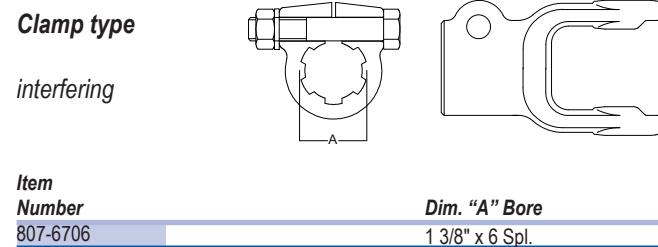


### Roll Pin




Item Number	Dim. "A" mm	Dim. "B" mm
508-1085	10	85

### Universal Joint

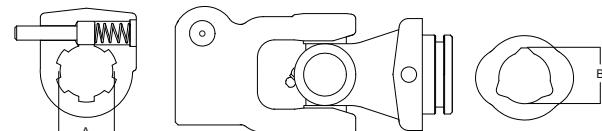


Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-6706-00	1 3/8" x 6 Spl.	45 (inner)
3002-6706-00	1 3/8" x 6 Spl	54 (outer)

### Outer Tube



Item Number	Length m
610-5404-100	1.0
610-5404-150	1.5
610-5404-000	3.0

## Guard (incl. Bearing Kit)

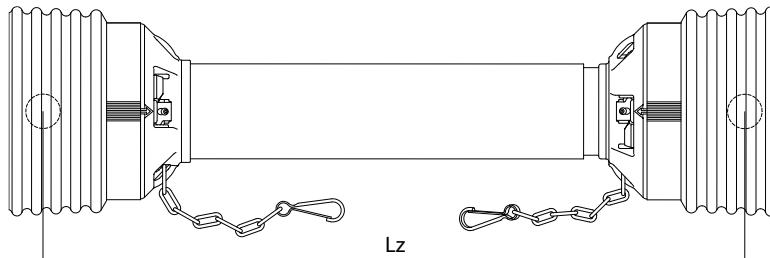

Item Number	Compressed Length (Lz) center cross - center cross
904-3500-056	560mm
904-3500-071	710mm
904-3500-081	810mm
904-3500-086	860mm
904-3500-101	1010mm
904-3500-121	1210mm
904-3500-136	1360mm


Assembly instructions guard, see page 7

## Easy Lock Replacement Kit




Item Number	25-per Kit
13001234	

## PTO drive shaft

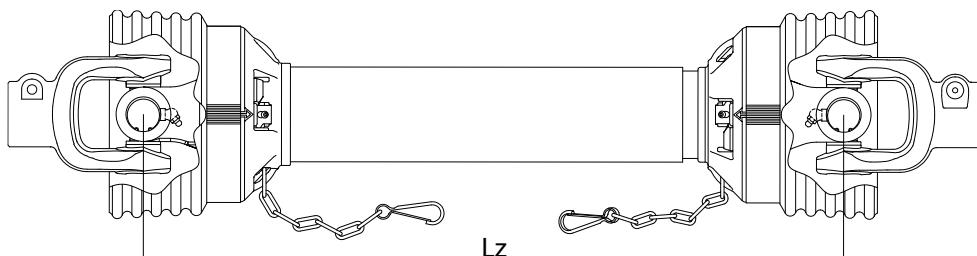


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-6700-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6700-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6700-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6700-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6700-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6700-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6700-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

## AB8 series

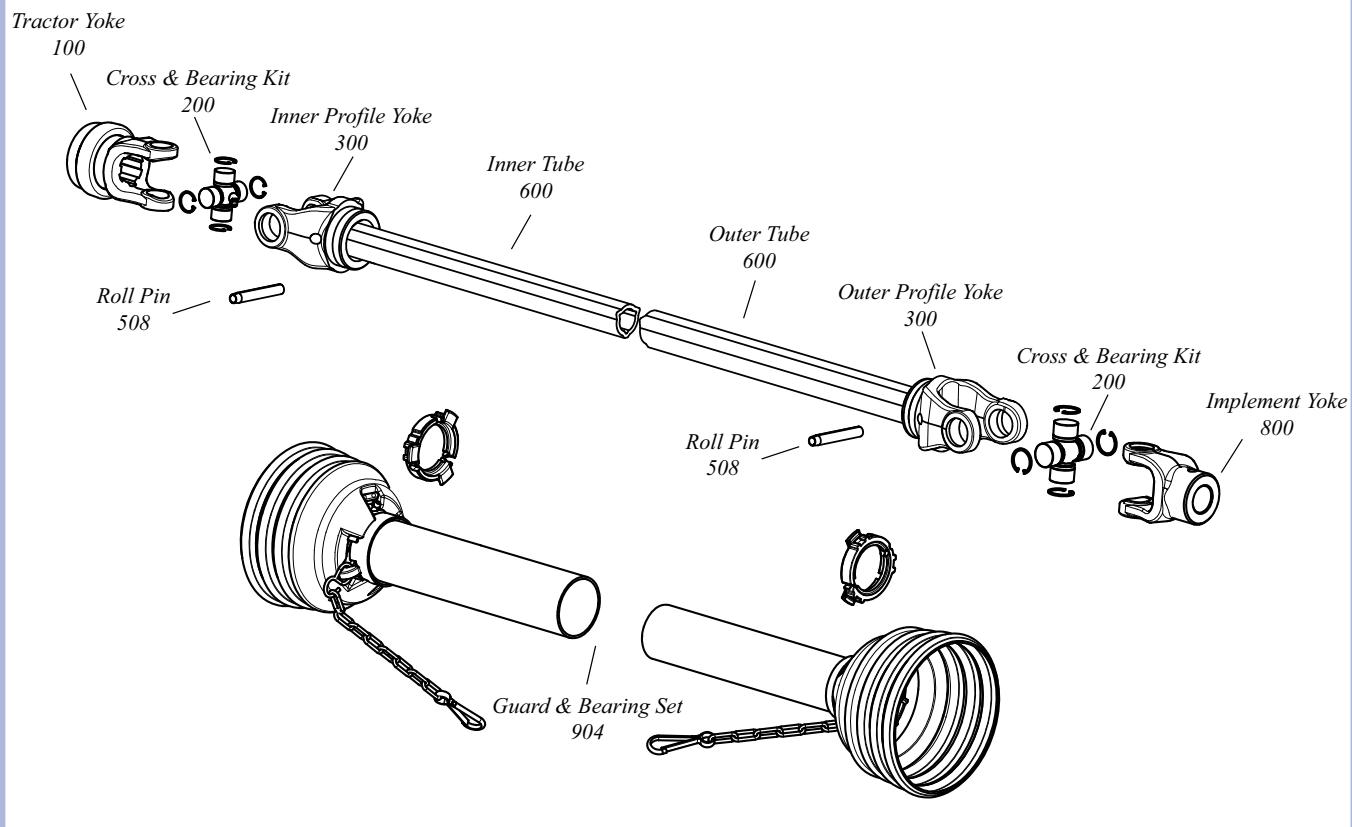


### Tractor Yoke

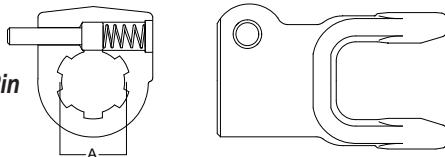

#### Item Number

Item Number	Dim. "A" Bore
102-6806	1 3/8" x 6 Spl.
102-6820	1 3/4" x 20 Spl.
102-6821	1 3/8" x 21 Spl.
102-6828	1 3/4" x 6 Spl.


### Tractor Yoke

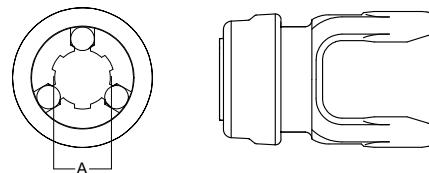

#### Item Number

Item Number	Dim. "A" Bore
101-6806	1 3/8" x 6 Spl.
101-6820	1 3/4" x 20 Spl.
101-6821	1 3/8" x 21 Spl.


### Tractor Yoke

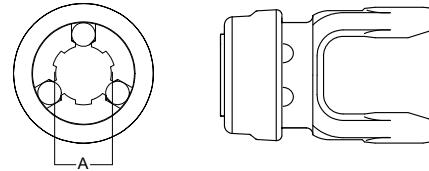

#### Item Number

Item Number	Dim. "A" Bore
110-6806	1 3/8" x 6 Spl.
110-6820	1 3/4" x 20 Spl.
110-6821	1 3/8" x 21 Spl.
110-6828	1 3/4" x 6 Spl.


### Cross & Bearing Kit (P-Kit)



#### Item Number



Item Number	Dim. "A"	Dim. "B"
200-6806	mm 34.9	mm 106.5

### Extended Lubrication Cross & Bearing Kit (E-Kit)





#### Item Number

Item Number	Dim. "A"	Dim. "B"
201-6806	mm 34.9	mm 106.5

**AB8 series****Inner Profile Yoke**


<b>Item Number</b>	<b>Dim. "A" mm</b>
300-6845 (special)	45
300-6854	54

**Outer Profile Yoke**


<b>Item Number</b>	<b>Dim. "A" mm</b>
300-6863	63

**Inner Tube**

Dim. "A" 54.0mm  
Wall 4.5mm





<b>Item Number</b>	<b>Length m</b>
610-5404-100	1.0
610-5404-150	1.5
610-5404-000	3.0

**Roll Pin**

<b>Item Number</b>	<b>Dim. "A" mm</b>	<b>Dim. "B" mm</b>
508-1290	12	90

**Implement Yoke****Clamp Type**


interfering




<b>Item Number</b>	<b>Dim. "A" Bore</b>
807-6828	1 3/4" x 6 Spl.
807-6820	1 3/4" x 20 Spl.

**Outer Tube**

Dim. "A" 63.0mm  
Wall 4.1mm




<b>Item Number</b>	<b>Length m</b>
610-6304-100	1.0
610-6304-150	1.5
610-6304-000	3.0

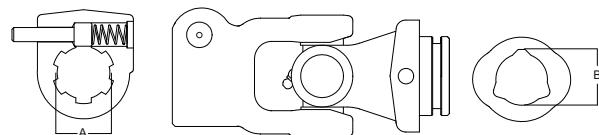**Universal Joint**

<b>Item Number</b>	<b>Quick Disconnect Dim. "A" Bore</b>	<b>Profile Yoke Dim. "B" mm</b>
3001-6806-00	1 3/8" x 6 Spl.	54 (inner)
3002-6806-00	1 3/8" x 6 Spl	63 (outer)

## AB8 series

### **Guard (incl. Bearing Kit)**

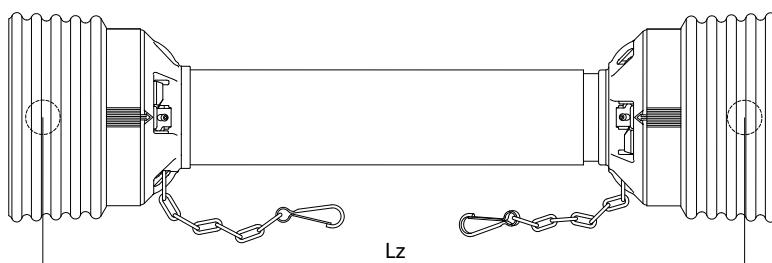

Item Number	Compressed Length (Lz) center cross - center cross
904-4500-056	560mm
904-4500-071	710mm
904-4500-081	810mm
904-4500-086	860mm
904-4500-101	1010mm
904-4500-121	1210mm
904-4500-136	1360mm


Assembly instructions guard, see page 7

### **Easy Lock Replacement Kit**




Item Number	25-per Kit
13001234	


### **PTO drive shaft**

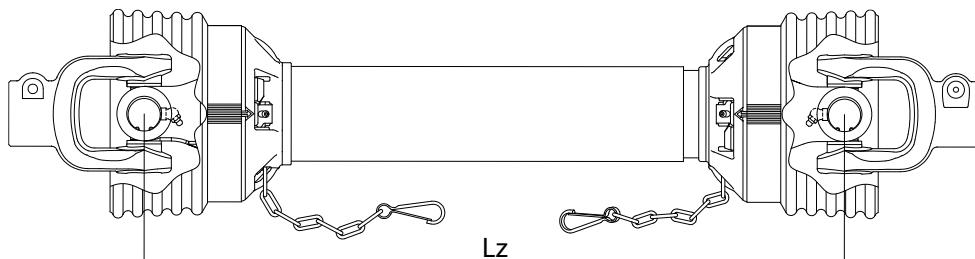


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-6800-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6800-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6800-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6800-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6800-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6800-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-6800-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

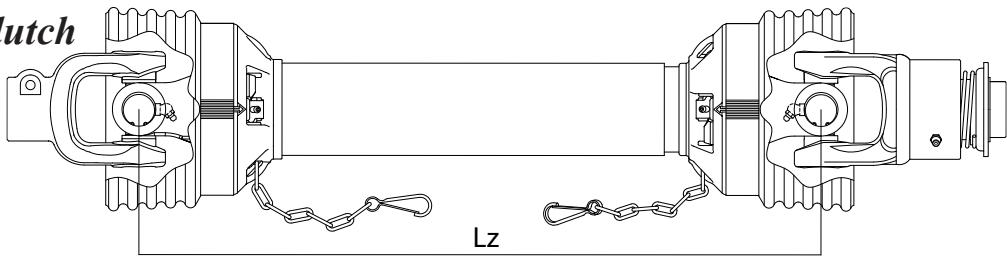**PTO drive shaft****with Overrunning Clutch  
Clockwise**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-6800-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6800-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6800-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6800-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6800-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6800-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-6800-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

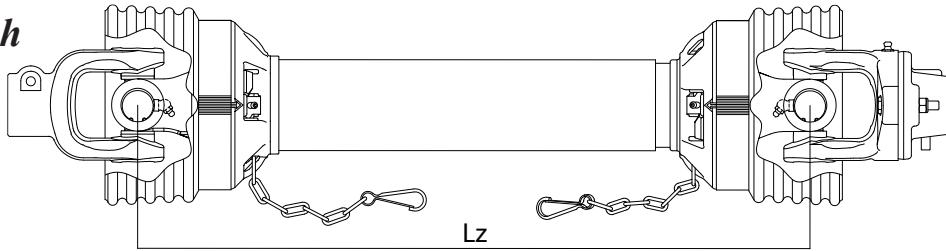
**PTO drive shaft****with Shear Bolt Clutch  
4180Nm**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-6800-056 22	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180
1680-6800-071 22	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180
1680-6800-081 22	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180
1680-6800-086 22	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180
1680-6800-101 22	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180
1680-6800-121 22	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180
1680-6800-136 22	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	4180

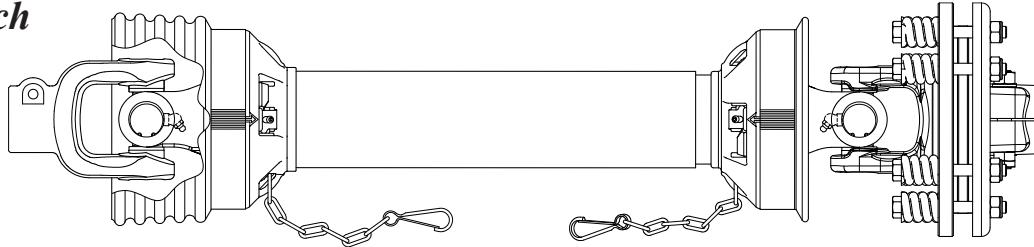
**PTO drive shaft****with Friction Clutch  
2000Nm**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-6853-056 08	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-6853-071 08	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-6853-081 08	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-6853-086 08	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-6853-101 08	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-6853-121 08	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-6853-136 08	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000

## AB9 series

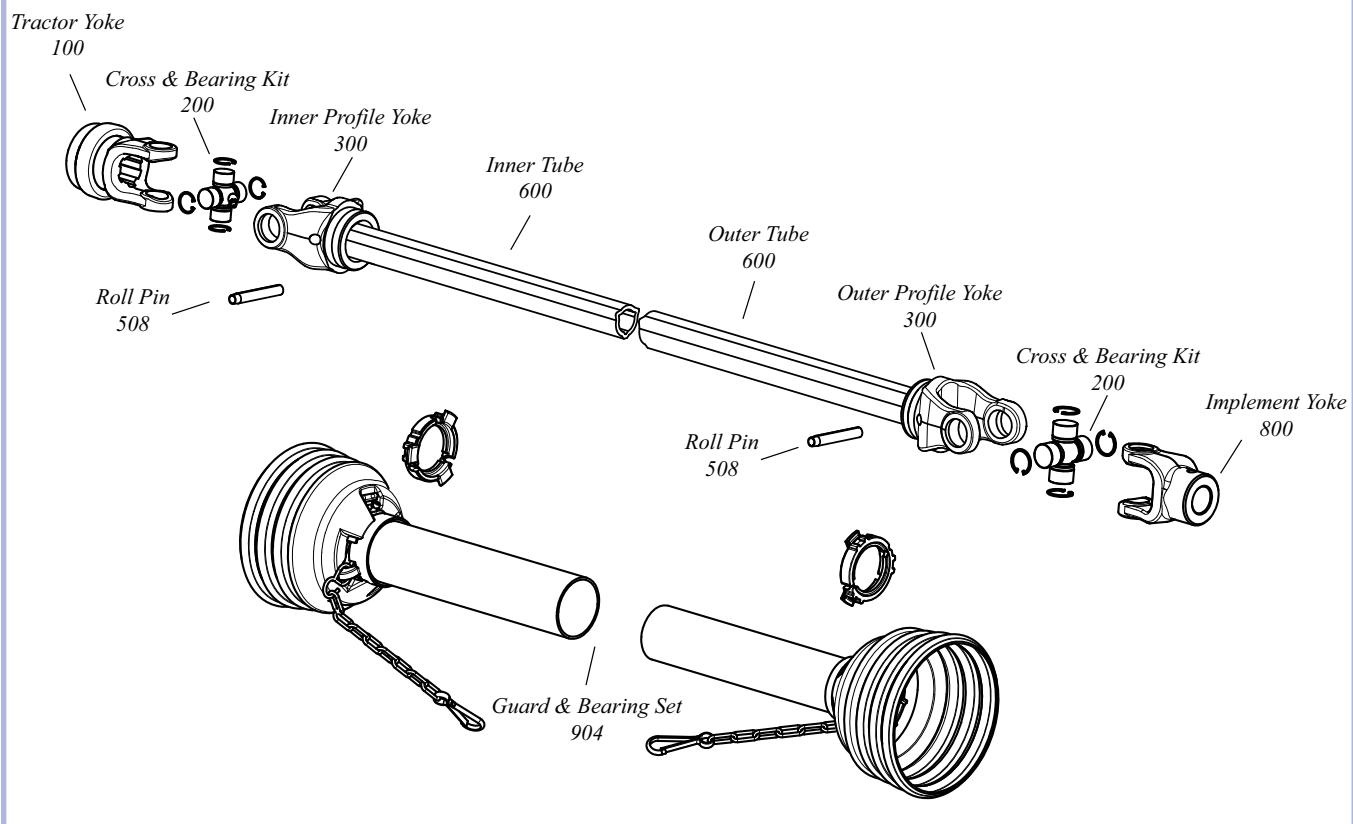


### Tractor Yoke

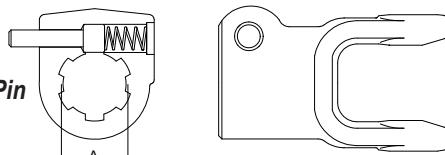


**Quick Disconnect Pin**

Item Number	Dim. "A" Bore
102-6906	1 3/8" x 6 Spl.
102-6920	1 3/4" x 20 Spl.
102-6921	1 3/8" x 21 Spl.
102-6928	1 3/4" x 6 Spl.

### Cross & Bearing Kit (P-Kit)




### Tractor Yoke

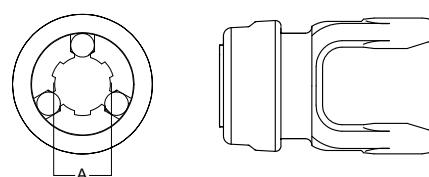

**Safety Slide Lock**

Item Number	Dim. "A" Bore
101-6906	1 3/8" x 6 Spl.
101-6920	1 3/4" x 20 Spl.
101-6921	1 3/8" x 21 Spl.


### Tractor Yoke


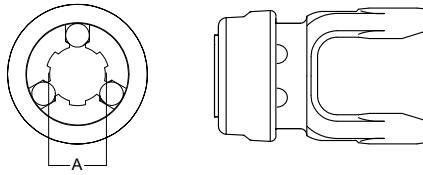


**Auto-Lok**



Item Number	Dim. "A" Bore
110-6906	1 3/8" x 6 Spl.
110-6920	1 3/4" x 20 Spl.
110-6928	1 3/4" x 6 Spl.

### Extended Lubrication Cross & Bearing Kit (E-Kit)



**Inner Profile Yoke**


Item Number	Dim. "A" mm
300-6954	54

**Outer Profile Yoke**

Item Number	Dim. "A" mm
300-6963	63

**Inner Tube**

Dim. "A" 54.0mm  
Wall 5.0mm



Item Number	Length m
610-5405-100	1.0
610-5405-150	1.5
610-5405-000	3.0

**Outer Tube**

Dim. "A" 63.0mm  
Wall 4.1mm





Item Number	Length m
610-6304-100	1.0
610-6304-150	1.5
610-6304-000	3.0

**Roll Pin**


Item Number	Dim. "A" mm	Dim. "B" mm
508-1210	12	100

**Implement Yoke**

**Clamp Type**  
*interfering*




Item Number	Dim. "A" Bore
807-6920	1 3/4" x 20 Spl.
807-6928	1 3/4" x 6 Spl.

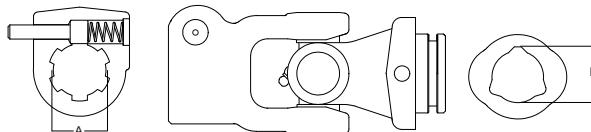**Universal Joint**

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-6906-00	1 3/8" x 6 Spl.	54 (inner)
3002-6906-00	1 3/8" x 6 Spl	63 (outer)

## **AB9 series**

### **Guard (incl. Bearing Kit)**

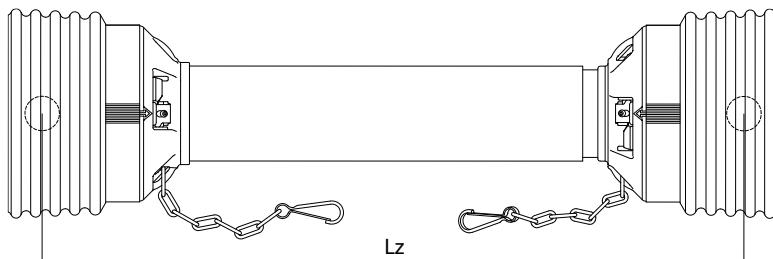

<b>Item Number</b>
904-4500-081
904-4500-086
904-4500-101
904-4500-121
904-4500-136

<b>Compressed Length (Lz) center cross - center cross</b>
810mm
860mm
1010mm
1210mm
1360mm

Assembly instructions guard, see page 7


### **Easy Lock Replacement Kit**



<b>Item Number</b>
13001234

25-per Kit

### **PTO drive shaft**

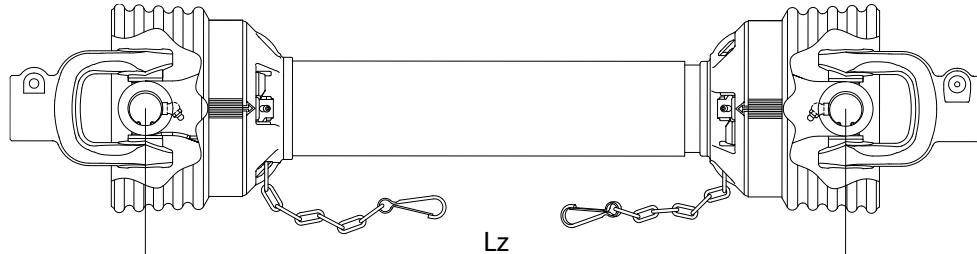


<b>Item Number</b>
1600-6900-081
1600-6900-086
1600-6900-101
1600-6900-121
1600-6900-136

<b>Compressed Length (Lz) center cross - center cross</b>
810mm
860mm
1010mm
1210mm
1360mm



<b>Tractor Yoke</b>
1 3/8" x 6 Spl. QD

<b>Implement Yoke</b>
1 3/8" x 6 Spl. QD

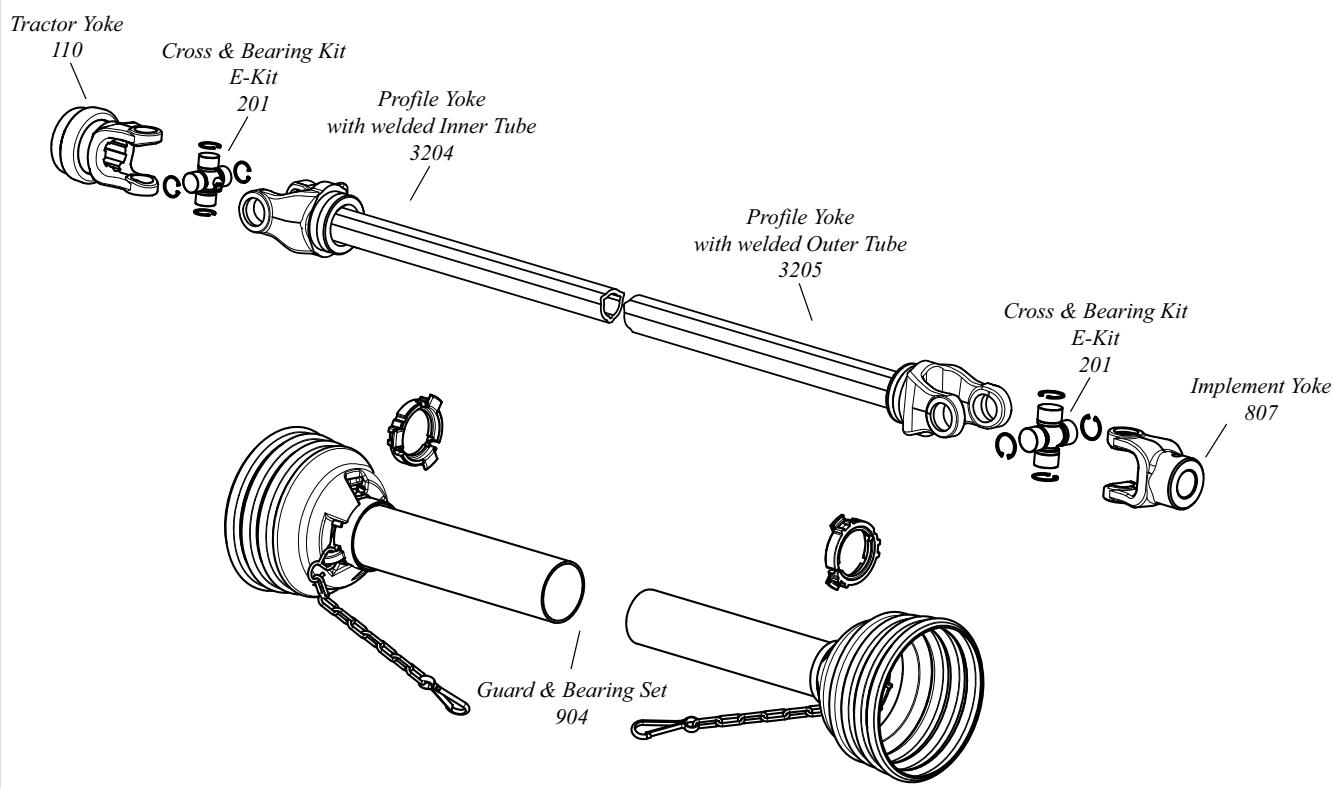

### Tractor Yoke


Auto-Lok



Item Number	Dim. "A" Bore
110-7720	1 3/4" x 20 Spl.


1 3/4" x 20 Spl.

### Extended Lubrication Cross & Bearing Kit (E-Kit)




Item Number	Dim. "A" mm	Dim. "B" mm
201-7726	45.0	126.0

### Profile Yoke With Welded Outer Tube

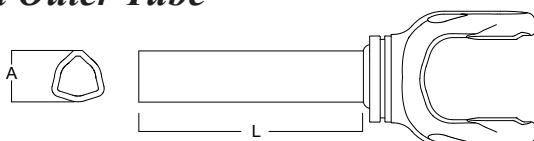

Item Number	Dim. "A" mm	Dim. "L" mm
310-7766-101	66.0	1010
310-7766-151	66.0	1510


### Profile Yoke With Welded Inner Tube

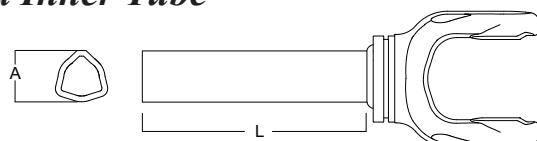

Item Number	Dim. "A" mm	Dim. "L" mm
310-7754-101	54.0	1010
310-7754-151	54.0	1510

## AM77S series

### **Guard (incl. Bearing Kit)**

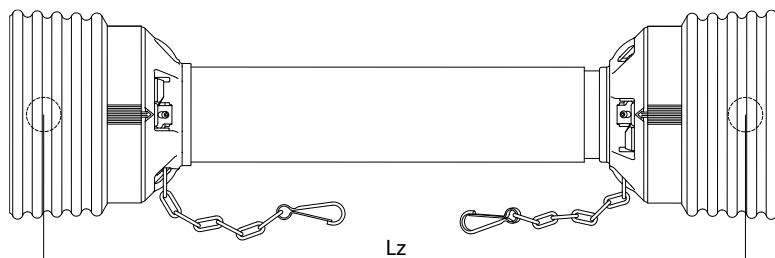

Item Number	Compressed Length (Lz) center cross - center cross
904-4600-081	810mm
904-4600-086	860mm
904-4600-101	1010mm
904-4600-121	1210mm
904-4600-136	1360mm


Assembly instructions guard, see page 7

### **Easy Lock Replacement Kit**



Item Number	
13001234	25-per Kit

### **PTO drive shaft**

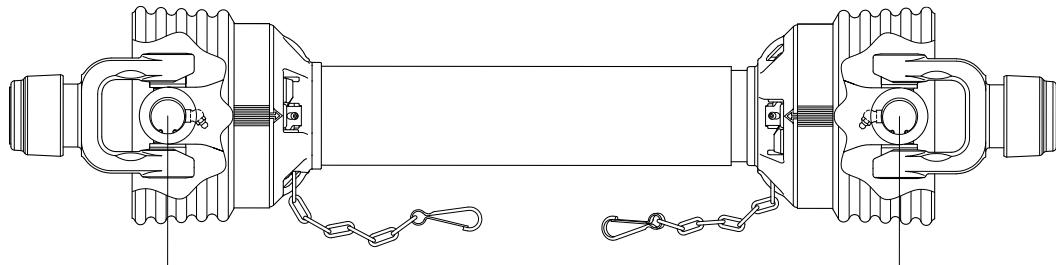



Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-7740-081	810mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. AL
1600-7740-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. AL
1600-7740-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. AL
1600-7740-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. AL
1600-7740-136	1360mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. AL

# Miscellaneous AB series

## AB7



### Tractor Yoke

Quick Disconnect Pin





Item Number	AB series	Dim. "A" Bore
102-8706	AB7	1 3/8" x 6 Spl.
102-8720	AB7	1 3/4" x 20 Spl.
102-8721	AB7	1 3/8" x 21 Spl.
102-8728	AB7	1 3/4" x 6 Spl.

### Inner Profile Yoke



Item Number	AB series	Dim. "A" mm
300-8745	AB7	45



### Outer Profile Yoke



Item Number	AB series	Dim. "A" mm
300-8754	AB7	54

AB-Series

### Universal Joint



Item Number	AB series	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-8706-00	AB7	1 3/8" x 6 Spl.	45 (inner)
3002-8706-00	AB7	1 3/8" x 6 Spl	54 (outer)

## **N O T E S**

AB-Series




Weasler®


# AW-SERIES PTO DRIVE SHAFTS & COMPONENTS

AW-Series

## AW10 series

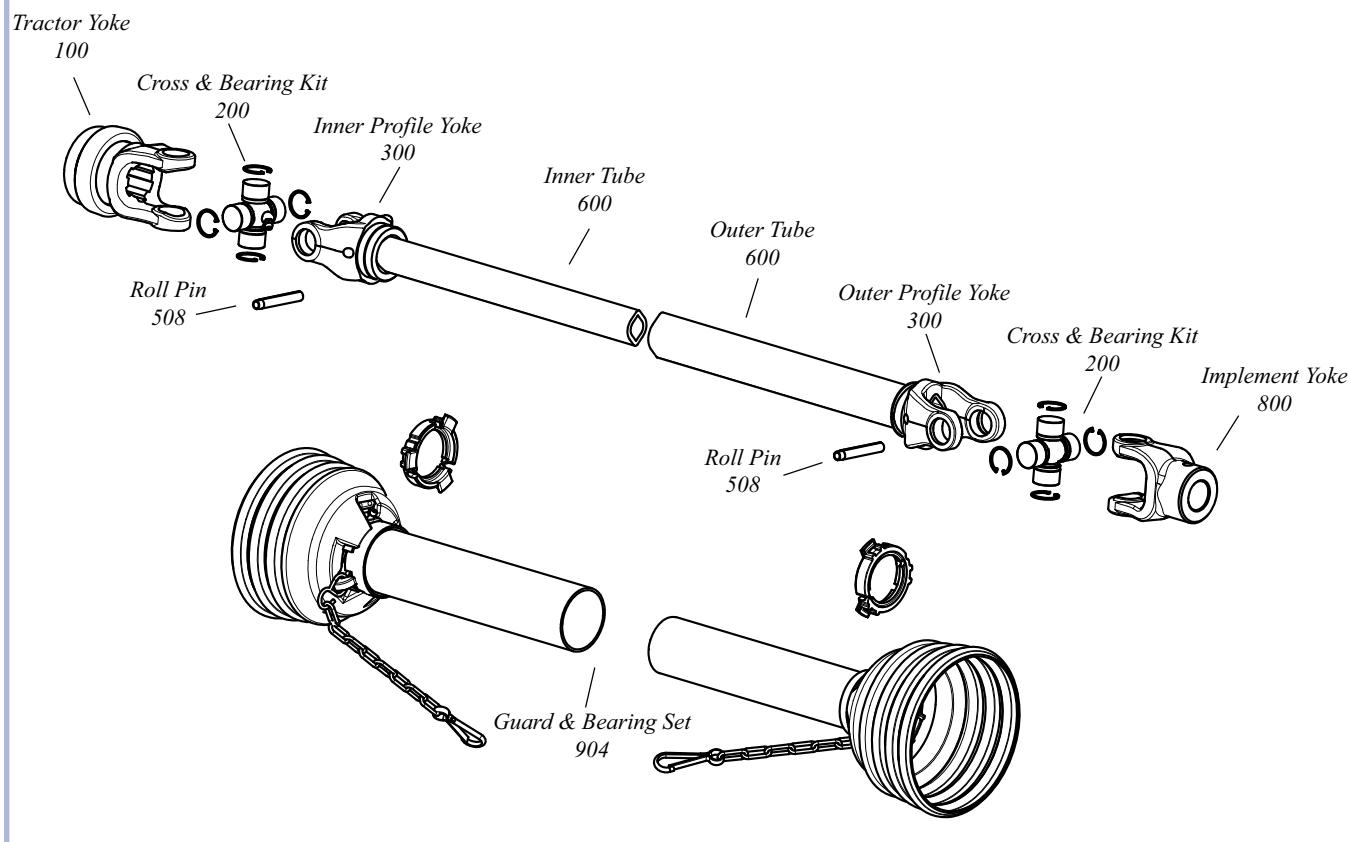


### Tractor Yoke

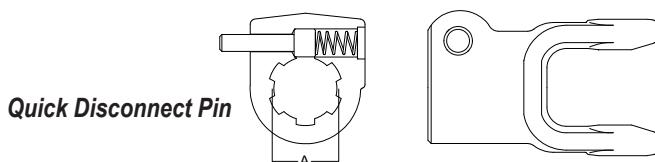


Item Number	Dim. "A" Bore
102-7106	1 3/8" x 6 Spl.
102-7118	1 1/8" x 6 Spl.
102-7121	1 3/8" x 21 Spl.
102-7125	21 x 25 x 6 Spl.
102-7132	32 x 38 x 8 Spl.

### Cross & Bearing Kit (P-Kit)




Item Number	Dim. "A" mm	Dim. "B" mm
200-7155	22.0	54.8

### Tractor Yoke

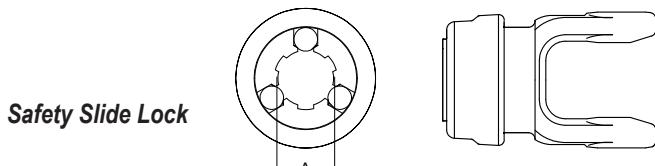


Item Number	Dim. "A" Bore
101-7106	1 3/8" x 6 Spl.

### Tractor Yoke

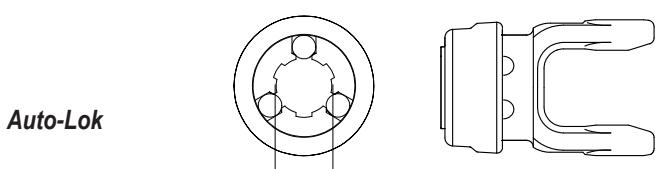


Item Number	Dim. "A" Bore
110-7106	1 3/8" x 6 Spl.


### Extended Lubrication Cross & Bearing Kit (E-Kit)



Item Number	Dim. "A" mm	Dim. "B" mm
201-7155	22.0	54.8

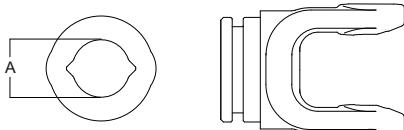**AW10 series****Inner Profile Yoke**


<b>Item Number</b>	<b>Dim. "A" mm</b>
300-7123 (standard)	23
300-7134	34

**Inner Tube**Dim. "A" 23.5mm  
Wall 5.0mm

<b>Item Number</b>	<b>Length m</b>
620-2305-100	1.0
620-2305-150	1.5
620-2305-000	3.0

**Inner Tube (Solid)**


Dim. "A" 23.5mm




<b>Item Number</b>	<b>Length m</b>
620-2300-100	1.0
620-2300-150	1.5
620-2300-000	3.0

**Roll Pin**


<b>Item Number</b>	<b>Dim. "A" mm</b>	<b>Dim. "B" mm</b>
508-0855	8	55

**Outer Tube**Dim. "A" 30.0mm  
Wall 3.0mm


<b>Item Number</b>	<b>Length m</b>
620-3003-100	1.0
620-3003-150	1.5
620-3003-000	3.0

**Outer Profile Yoke**


<b>Item Number</b>	<b>Dim. "A" mm</b>
300-7130 (standard)	30
300-7141	41

**Implement Yoke****Round Bore**  
With Keyway & Set Screw


<b>Item Number</b>	<b>Dim. "A" Bore mm</b>	<b>Standard Keyway mm</b>
800-7120	20	6
800-7125	25	8
800-7130	30	8

**Implement Yoke****Round Bore**  
With Pin Hole

<b>Item Number</b>	<b>Dim. "A" Bore mm</b>
830-7120	20
830-7125	25
830-7130	30

**Implement Yoke****Clamp Type**non-interfering  
With Keyway & Set Screw


<b>Item Number</b>	<b>Dim. "A" Bore mm</b>	<b>Standard Keyway mm</b>
831-7125	25	8
831-7130	30	8

**Implement Yoke****Clamp Type**interfering  
With Keyway & Set Screw

<b>Item Number</b>	<b>Dim. "A" Bore mm</b>	<b>Standard Keyway mm</b>
847-7125	25	8
847-7130	30	8


# AW10 series

## Universal Joint

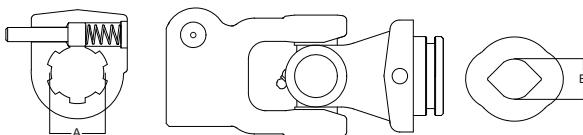

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-7106-00 (standard)	1 3/8" x 6 Spl.	23 (inner)
3002-7106-00 (standard)	1 3/8" x 6 Spl	30 (outer)
3003-7106-00	1 3/8" x 6 Spl.	34 (inner)
3004-7106-00	1 3/8" x 6 Spl.	41 (outer)

## Guard (incl. Bearing Kit)

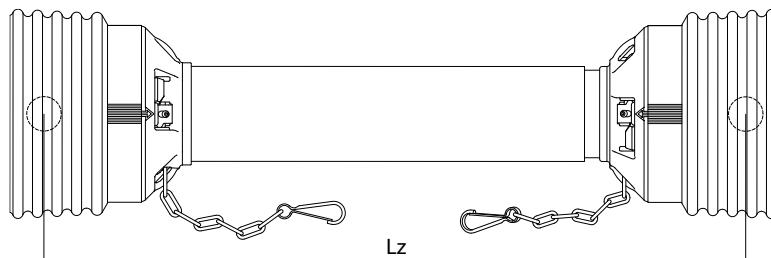

Item Number	Compressed Length (Lz) center cross - center cross
904-1000-046	460mm
904-1000-051	510mm
904-1000-056	560mm
904-1000-061	610mm
904-1000-071	710mm
904-1000-076	760mm
904-1000-081	810mm
904-1000-086	860mm
904-1000-101	1010mm
904-1000-121	1210mm


Assembly instructions guard, see page 7

## Easy Lock Replacement Kit




Item Number	25-per Kit
13021234	

## PTO drive shaft

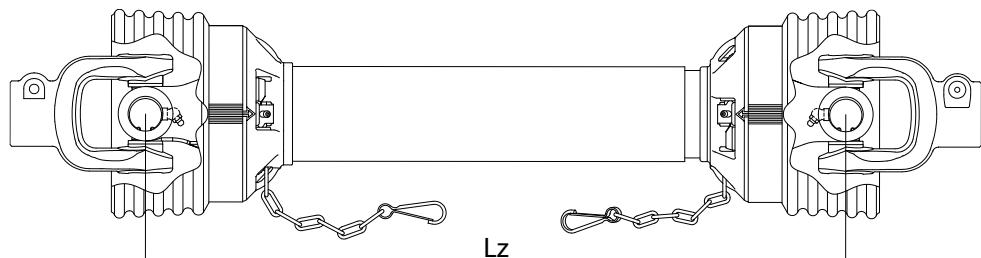


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-7100-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7100-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

**PTO drive shaft  
with Overrunning Clutch  
Clockwise**

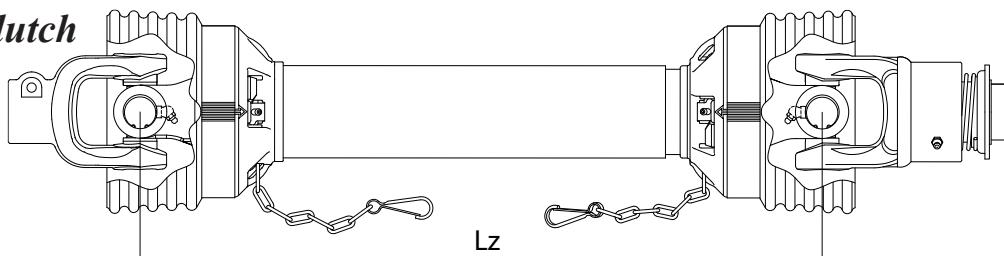


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-7100-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7100-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

**PTO drive shaft  
with Ratchet Clutch  
300Nm**

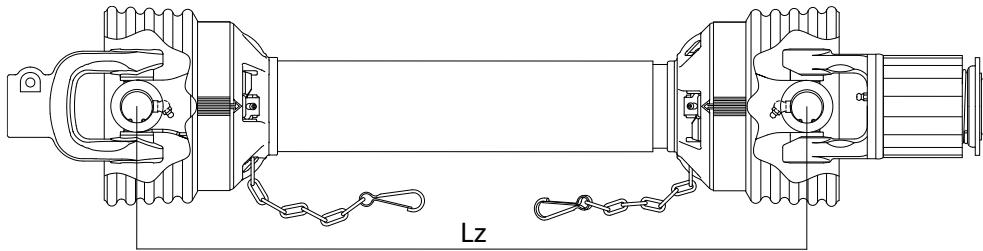

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7100-046 01	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-051 01	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-056 01	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-061 01	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-071 01	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-076 01	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-081 01	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-086 01	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-101 01	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7100-121 01	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300


**PTO drive shaft  
with Ratchet Clutch  
600Nm**

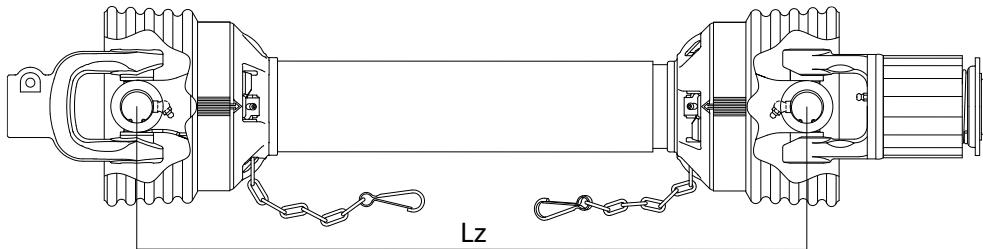

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7100-046 02	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-051 02	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-056 02	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-061 02	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-071 02	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-076 02	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-081 02	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-086 02	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-101 02	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7100-121 02	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600


## AW20 series

### Tractor Yoke

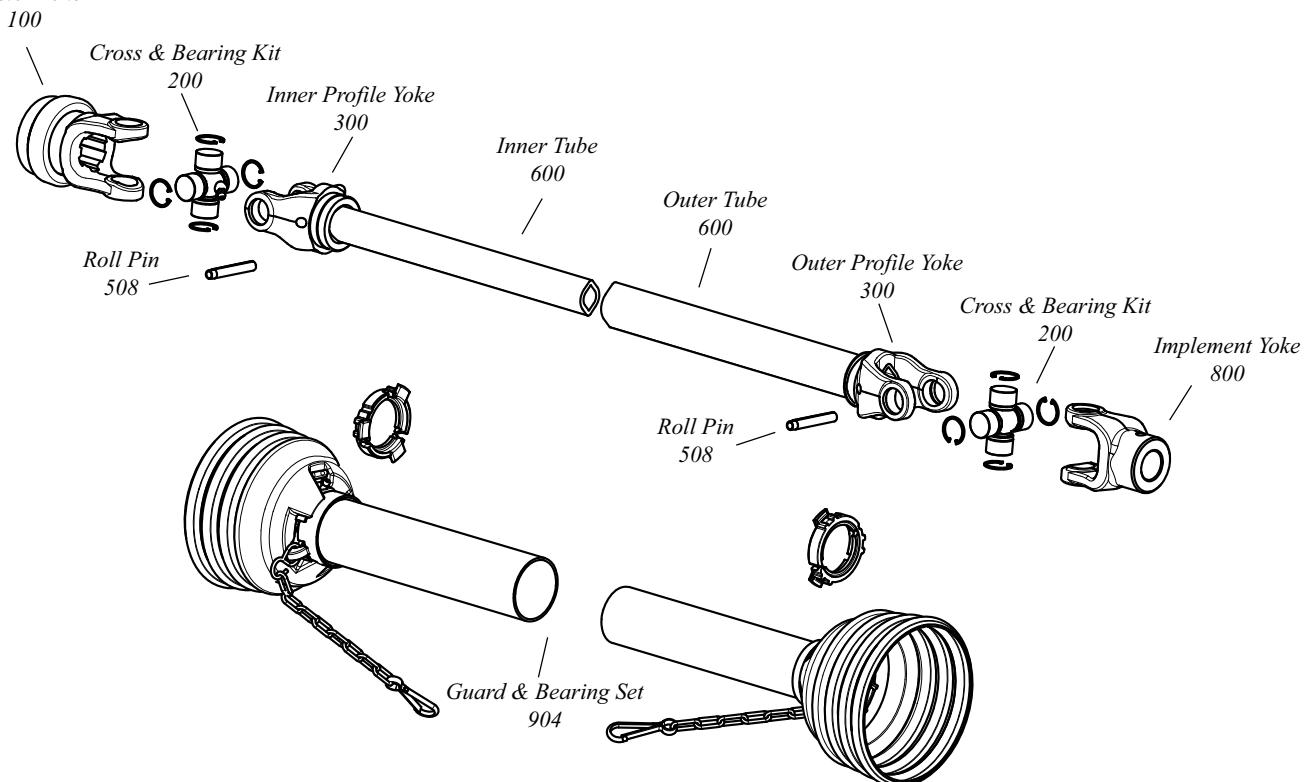

### Tractor Yoke

#### Quick Disconnect Pin

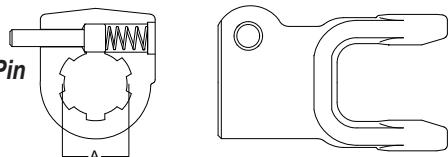

##### Item

##### Number

102-8206

##### Dim. "A" Bore

1 3/8" x 6 Spl.

102-8218

1 1/8" x 6 Spl.


102-8221

1 3/8" x 21 Spl.

102-8232


32 x 38 x 8 Spl.

### Cross & Bearing Kit (P-Kit)



### Tractor Yoke

#### Safety Slide Lock

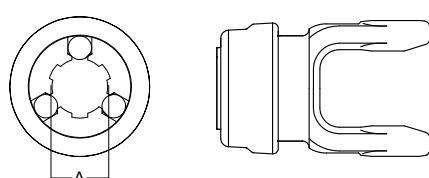

##### Item

##### Number


101-8206

##### Dim. "A" Bore

1 3/8" x 6 Spl.

### Tractor Yoke

#### Auto-Lok

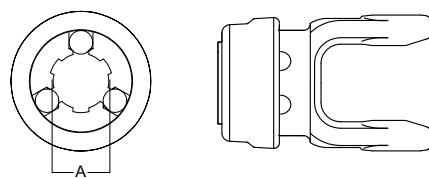

##### Item


##### Number

110-8206

##### Dim. "A" Bore


1 3/8" x 6 Spl.

### Extended Lubrication Cross & Bearing Kit (E-Kit)



Item Number	Dim. "A" mm	Dim. "B" mm
201-8261	23.8	61.2


## AW20 series

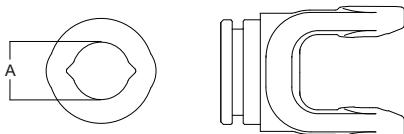**Inner Profile Yoke**

<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>
300-7223	23
300-7234 (standard)	34

**Inner Tube**

Dim. "A" 34.5mm  
Wall 4.0mm




<b>Item Number</b>	<b>Length</b> <b>m</b>
620-3404-100	1
620-3404-150	1.5
620-3404-000	3

**Roll Pin**


<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>	<b>Dim. "B"</b> <b>mm</b>
508-1065	10	65

**Outer Tube**


Dim. "A" 41.0mm  
Wall 3.0mm



<b>Item Number</b>	<b>Length</b> <b>m</b>
620-4103-100	1
620-4103-150	1.5
620-4103-000	3


**Outer Profile Yoke**

<b>Item Number</b>	<b>Dim. "A"</b> <b>mm</b>
300-7230	30
300-7241 (standard)	41

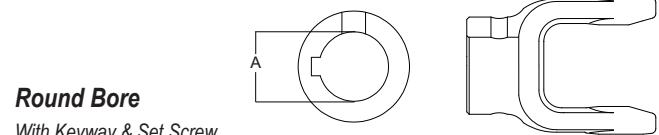**Implement Yoke**


**Round Bore**  
With Keyway & Set Screw

<b>Item Number</b>	<b>Dim. "A" Bore</b> <b>mm</b>	<b>Standard Keyway</b> <b>mm</b>
800-8220	20	6
800-8225	25	8
800-8230	30	8

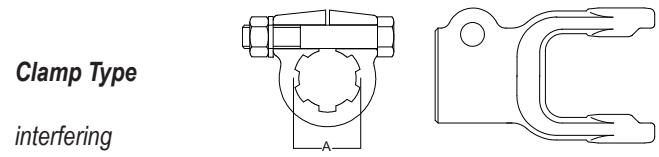**Implement Yoke****Clamp Type**


interfering

<b>Item Number</b>	<b>Dim. "A" Bore</b>
807-8206	1 3/8" x 6 Spl.

**Implement Yoke**

**Round Bore**  
With Pin Hole


<b>Item Number</b>	<b>Dim. "A" Bore</b> <b>mm</b>
830-8225	25
830-8230	30

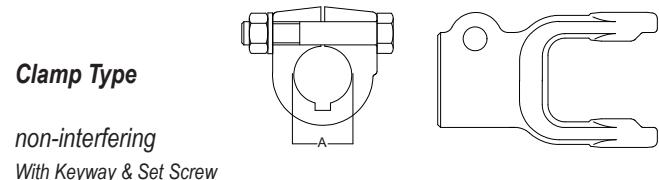**Implement Yoke****Clamp Type**

non-interfering

With Keyway & Set Screw

<b>Item Number</b>	<b>Dim. "A" Bore</b> <b>mm</b>	<b>Standard Keyway</b> <b>mm</b>
831-8225	25	8
831-8230	30	8


**Implement Yoke**

interfering  
With Keyway & Set Screw

<b>Item Number</b>	<b>Dim. "A" Bore</b> <b>mm</b>	<b>Standard Keyway</b> <b>mm</b>
847-8225	25	8
847-8230	30	8


# AW20 series

## Universal Joint

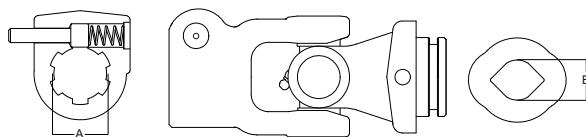

<b>Item Number</b>	<b>Quick Disconnect Dim. "A" Bore</b>	<b>Profile Yoke Dim. "B" mm</b>
3001-7206-00 (standard)	1 3/8" x 6 Spl.	34 (inner)
3002-7206-00 (standard)	1 3/8" x 6 Spl	41 (outer)
3003-7206-00	1 3/8" x 6 Spl.	23 (inner)
3004-7206-00	1 3/8" x 6 Spl.	30 (outer)

## Guard (incl. Bearing Kit)

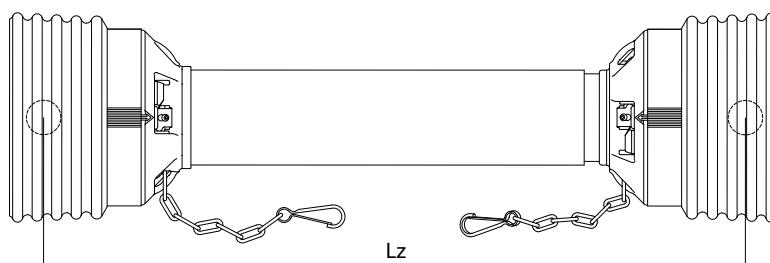

<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>
904-2500-046	460mm
904-2500-051	510mm
904-2500-056	560mm
904-2500-061	610mm
904-2500-071	710mm
904-2500-076	760mm
904-2500-081	810mm
904-2500-086	860mm
904-2500-101	1010mm
904-2500-121	1210mm
904-2500-136	1360mm


Assembly instructions guard, see page 7

## Easy Lock Replacement Kit




<b>Item Number</b>	<b>25-per Kit</b>
13001234	


## PTO drive shaft

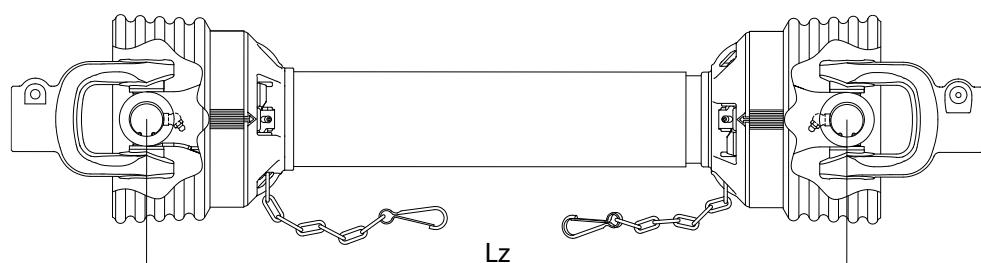


<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>	<b>Tractor Yoke</b>	<b>Implement Yoke</b>
1600-7200-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-051	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7200-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

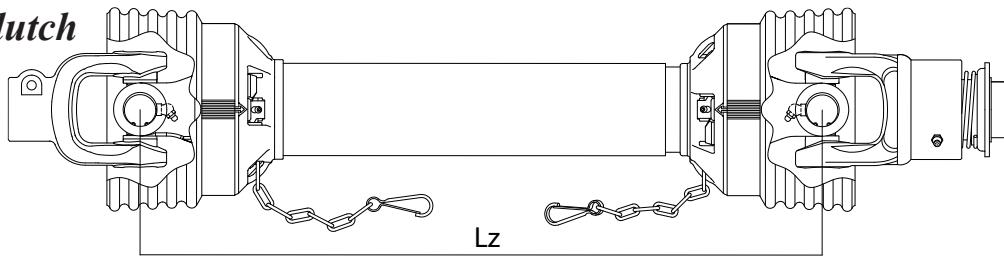**AW20 series****PTO drive shaft****with Overrunning Clutch****Clockwise**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-7200-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7200-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

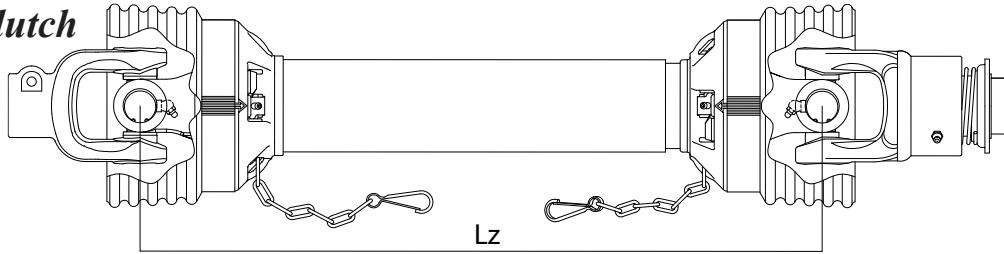**PTO drive shaft****with Overrunning Clutch****Counter Clockwise**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1631-7200-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7200-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise

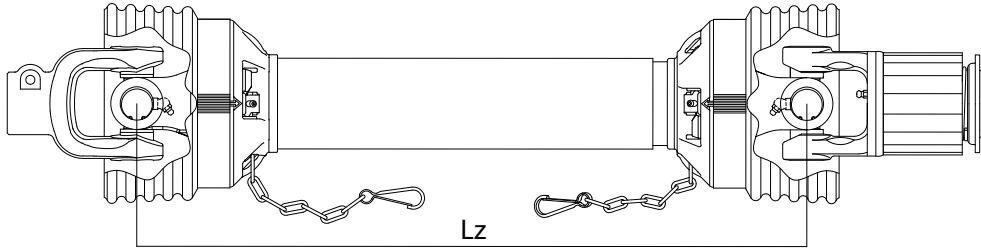**PTO drive shaft****with Ratchet Clutch****300Nm**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7200-046 01	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-051 01	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-056 01	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-061 01	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-071 01	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-076 01	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-081 01	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-086 01	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-101 01	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-121 01	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300
1620-7200-136 01	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	300


## AW20 series

**PTO drive shaft  
with Ratchet Clutch  
600Nm**

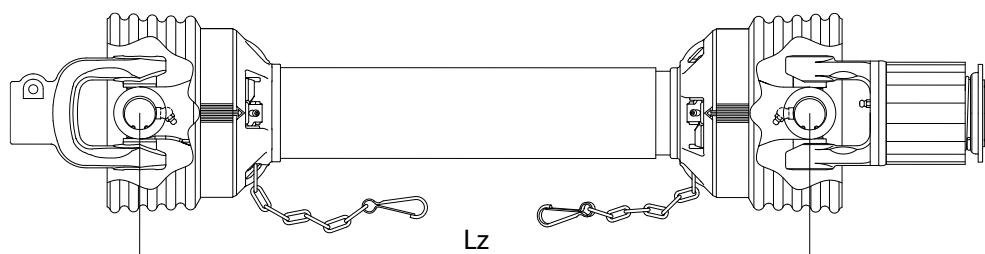


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7200-046 02	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-051 02	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-056 02	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-061 02	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-071 02	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-076 02	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-081 02	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-086 02	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-101 02	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-121 02	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7200-136 02	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600

**PTO drive shaft  
with Ratchet Clutch  
900Nm**


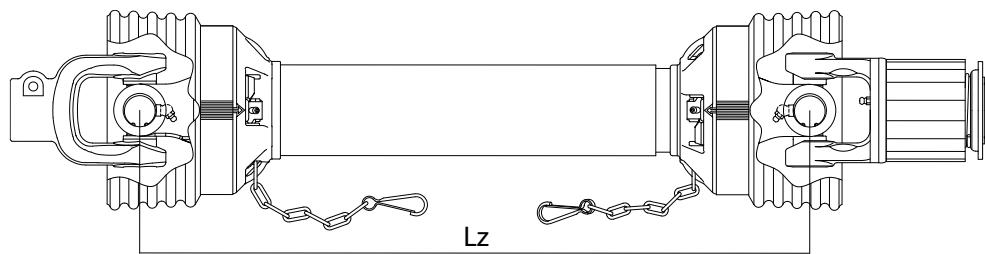


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7200-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7200-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900



**PTO drive shaft  
with Shear Bolt Clutch  
900Nm**

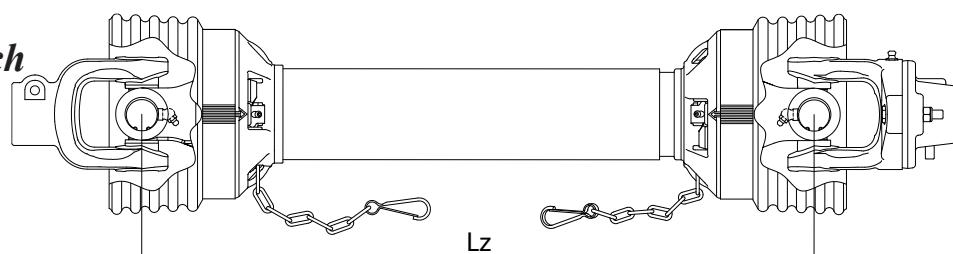


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-7200-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1680-7200-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900

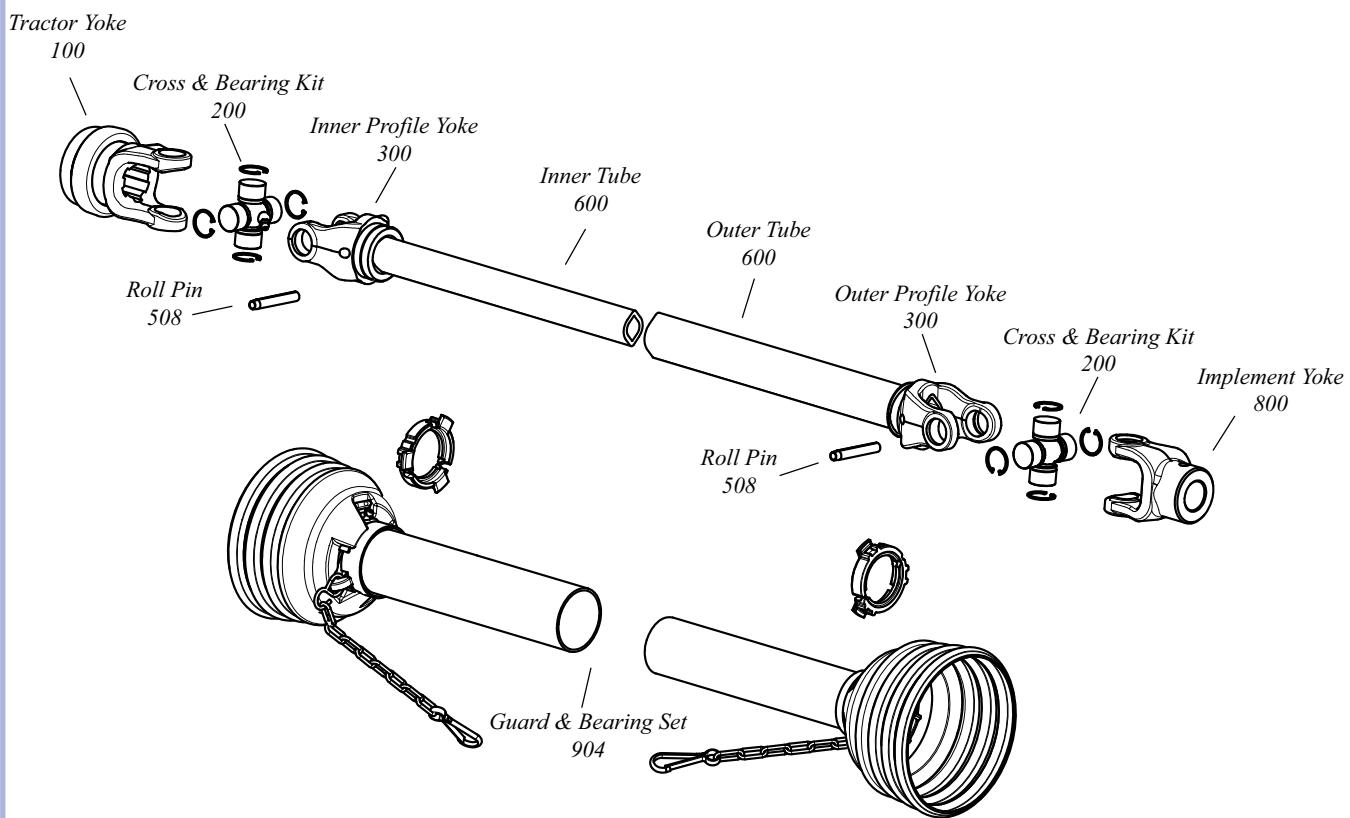**Tractor Yokes****Quick Disconnect Pin**



Item Number	Dim. "A" Bore
102-8406	1 3/8" x 6 Spl.
102-8418	1 1/8" x 6 Spl.
102-8421	1 3/8" x 21Spl.
102-8428	1 3/4" x 6 Spl.
102-8432	32 x 38 x 8 Spl.
102-8448	Hexagon 28.

**Cross & Bearing Kit (P-Kit)**


Item Number	Dim. "A"	Dim. "B"
200-8474	27.0	74.6

**Tractor Yokes****Safety Slide Lock**

Item Number	Dim. "A" Bore
101-8406	1 3/8" x 6 Spl.
101-8421	1 3/8" x 21 Spl.

**Tractor Yokes****Auto-Lok**


Item Number	Dim. "A" Bore
110-8406	1 3/8" x 6 Spl.
110-8421	1 3/8" x 21 Spl.

**Extended Lubrication Cross & Bearing Kit (E-Kit)**

Item Number	Dim. "A"	Dim. "B"
201-8474	27.0	74.6

# AW21 series


## Inner Profile Yoke

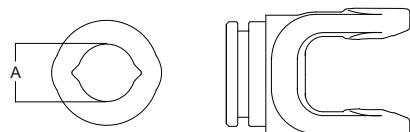

Item Number	Dim. "A" mm
300-7434 (standard)	34
300-7439	39


## Inner Tube

Dim. "A" 34.5mm  
Wall 4.0mm



Item Number	Length m
620-3404-100	1
620-3404-150	1.5
620-3404-000	3


## Roll Pin



Item Number	Dim. "A" mm	Dim. "B" mm
508-1065	10	65


## Outer Tube

Dim. "A" 41.0mm  
Wall 3.0mm




Item Number	Length m
620-4103-100	1
620-4103-150	1.5
620-4103-000	3

## Outer Profile Yoke

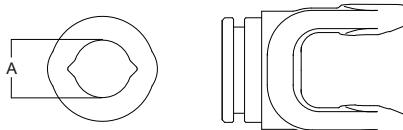

Item Number	Dim. "A" mm
300-7441 (standard)	41
300-7448	48


## Implement Yoke

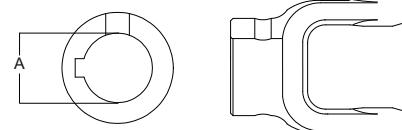

**Round Bore**  
With Keyway & Set Screw

Item Number	Dim. "A" Bore mm	Standard Keyway mm
800-8425	25	8
800-8430	30	8
800-8435	35	10

## Implement Yoke

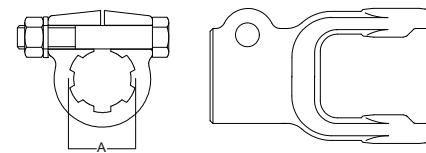


**Clamp Type**

interfering

Item Number	Dim. "A" Bore
807-8406	1 3/8" x 6 Spl.


## Implement Yoke



**Round Bore**  
With Pin Hole

Item Number	Dim. "A" Bore mm
830-8425	25
830-8430	30
830-8435	35

## Implement Yoke

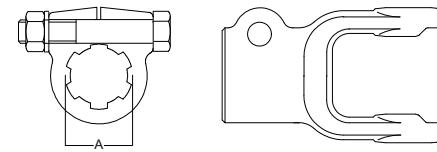


**Clamp Type**

non-interfering

Item Number	Dim. "A" Bore
837-8406	1 3/8" x 6 Spl.

## Implement Yoke



**Clamp Type**

interfering  
With Keyway & Set Screw



Item Number	Dim. "A" Bore mm	Standard Keyway mm
847-8430	30	8
847-8435	35	10

**Implement Yoke****Clamp Type**


non-interfering

With Keyway &amp; Set Screw

Item Number	Dim. "A" Bore mm	Standard Keyway mm
831-8430	30	8
831-8435	35	10

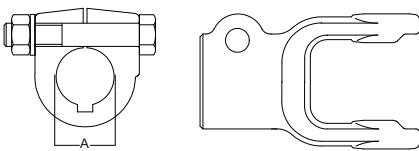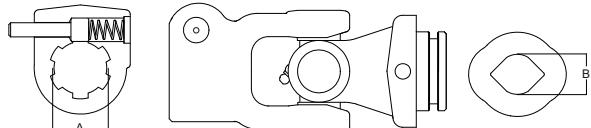**Universal Joint****Item Number**

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B" mm
3001-7406-00 (standard)	1 3/8" x 6 Spl.	34 (inner)
3002-7406-00 (standard)	1 3/8" x 6 Spl.	41 (outer)
3003-7406-00	1 3/8" x 6 Spl.	39 (inner)
3004-7406-00	1 3/8" x 6 Spl.	48 (outer)

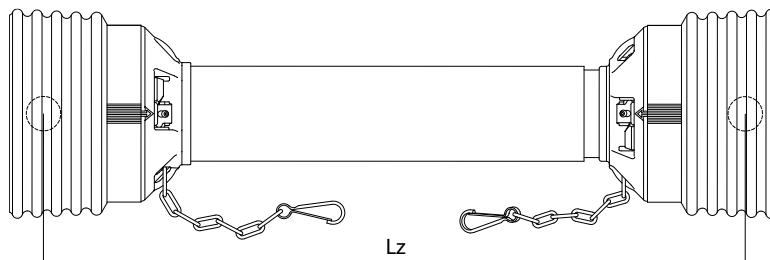
**Guard  
(incl. Bearing Kit)****Item Number**

Item Number	Compressed Length (Lz) center cross - center cross
904-2500-046	460mm
904-2500-051	510mm
904-2500-056	560mm
904-2500-061	610mm
904-2500-071	710mm
904-2500-076	760mm
904-2500-081	810mm
904-2500-086	860mm
904-2500-101	1010mm
904-2500-121	1210mm
904-2500-136	1360mm

Assembly instructions guard, see page 7

**Easy Lock Replacement Kit****Item Number**

13001234	25-per Kit
----------	------------

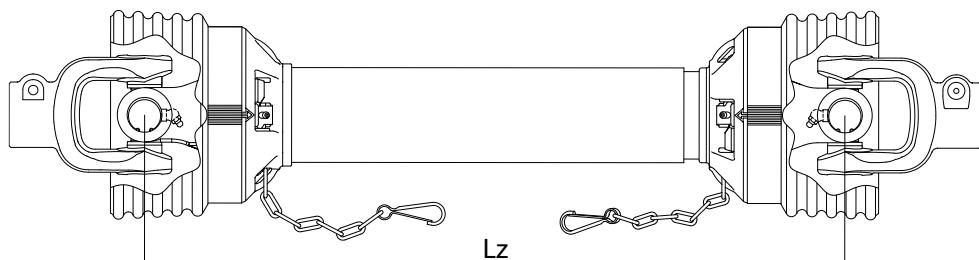
**PTO drive shaft****Item Number**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-7400-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7400-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

## AW21 series

### **PTO drive shaft**


### **with Overrunning Clutch Clockwise**

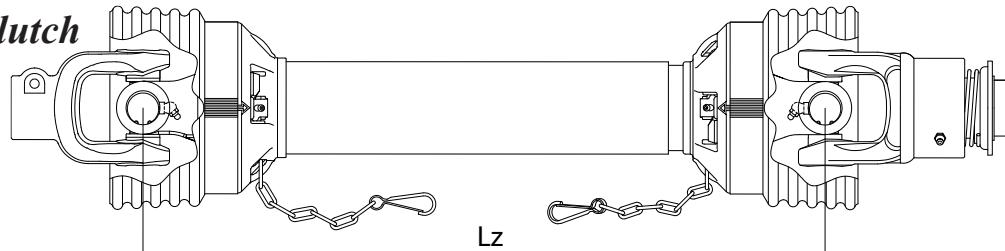

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-7400-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7400-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

### **PTO drive shaft**


### **with Overrunning Clutch Counter Clockwise**

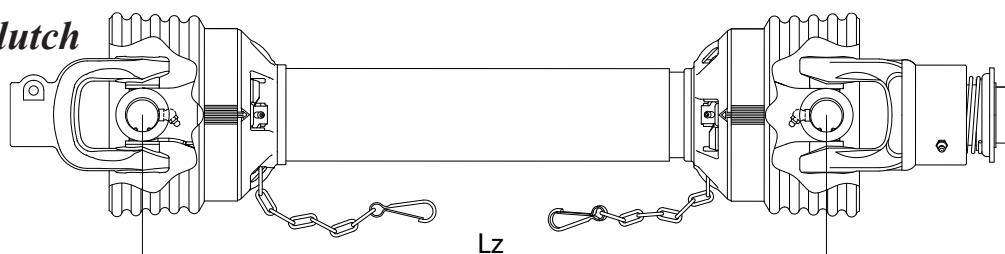

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1631-7400-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7400-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise


**AW21 series**

**PTO drive shaft  
with Ratchet Clutch  
600Nm**

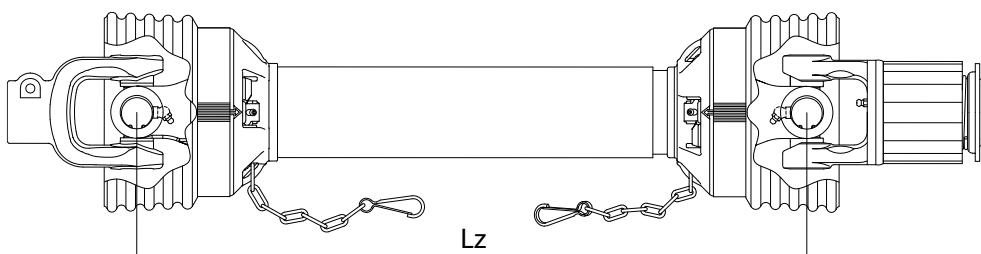


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7400-046 02	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-051 02	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-056 02	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-061 02	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-071 02	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-076 02	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-081 02	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-086 02	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-101 02	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-121 02	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600
1620-7400-136 02	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	600

**PTO drive shaft  
with Ratchet Clutch  
900Nm**

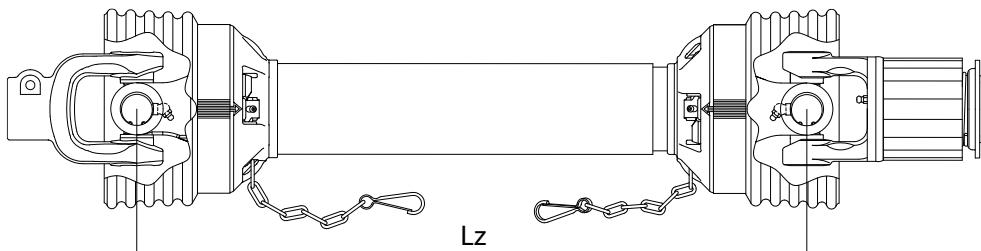

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7400-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7400-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900


**PTO drive shaft  
with Ratchet Clutch  
1200Nm**

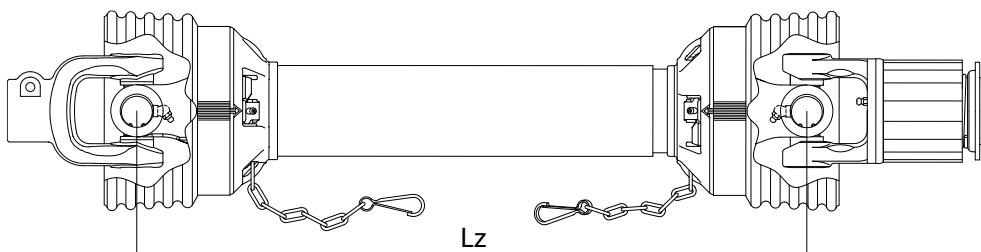

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1620-7400-046 04	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-051 04	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-056 04	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-061 04	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-071 04	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-076 04	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-081 04	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-086 04	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-101 04	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-121 04	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7400-136 04	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200


## AW21 series

**PTO drive shaft  
with Shear Bolt Clutch  
1600Nm**

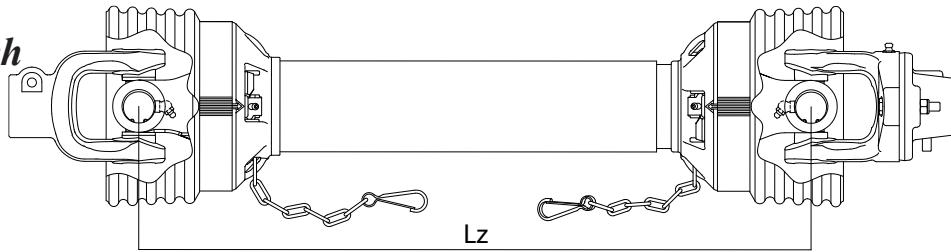


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-7400-046 18	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-051 18	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-056 18	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-061 18	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-071 18	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-076 18	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-081 18	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-086 18	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-101 18	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-121 18	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600
1680-7400-136 18	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1600

**PTO drive shaft  
with Friction Clutch  
900Nm**

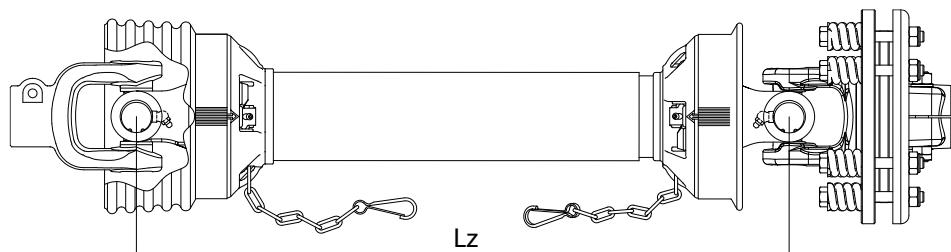


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-7400-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900
1610-7400-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	900

**PTO drive shaft  
with Overrunning  
Friction Clutch  
750Nm**

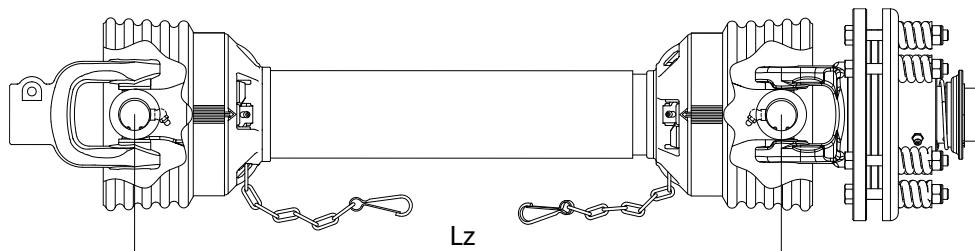

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-7400-046 06	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-051 06	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-056 06	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-061 06	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-071 06	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-076 06	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-081 06	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-086 06	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-101 06	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-121 06	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750
1611-7400-136 06	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	750


**PTO drive shaft  
with Overrunning  
Friction Clutch  
1250Nm**

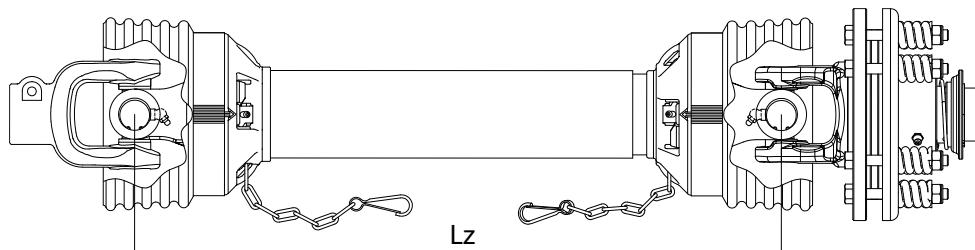

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-7400-046 07	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-051 07	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-056 07	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-061 07	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-071 07	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-076 07	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-081 07	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-086 07	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-101 07	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-121 07	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7400-136 07	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250


## AW35 series

### Tractor Yoke

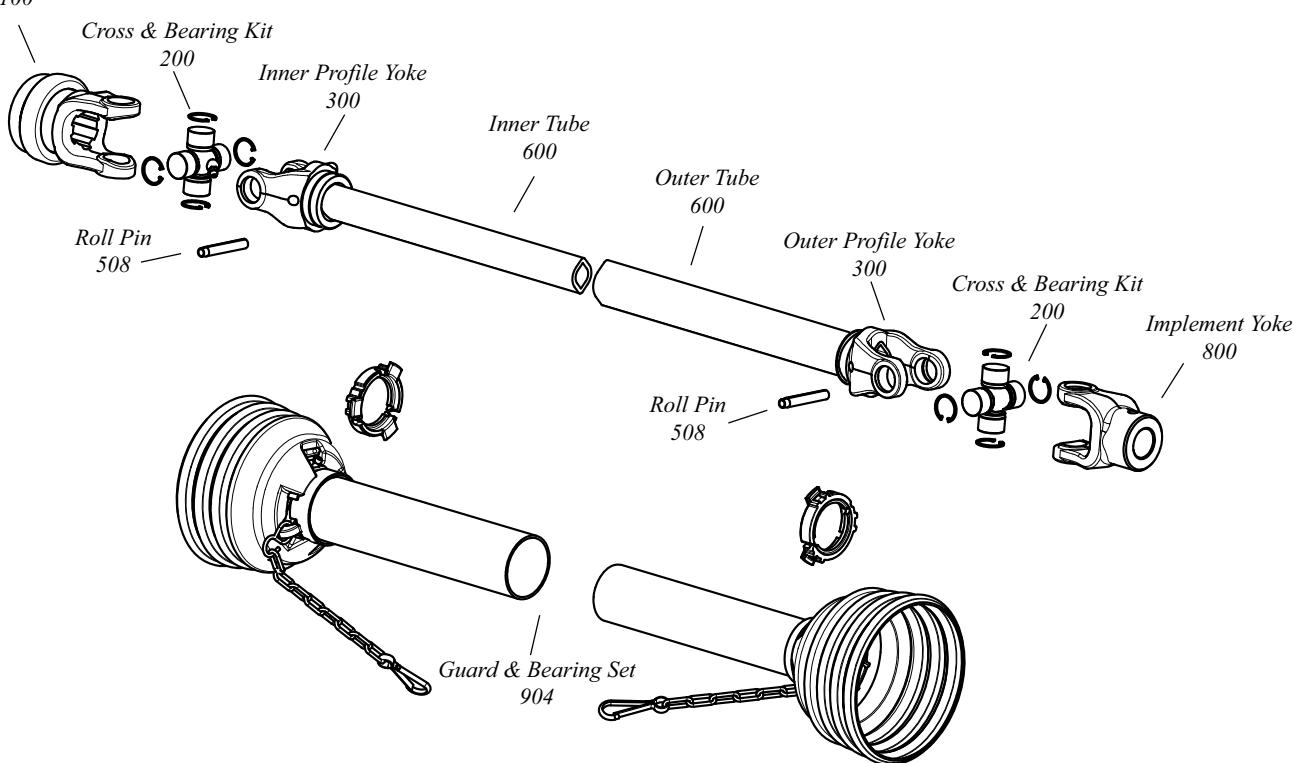

### Tractor Yokes


#### Quick Disconnect Pin

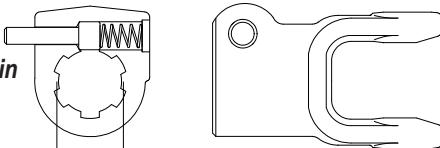

##### Item Number

Item Number	Dim. "A" Bore
102-7606	1 3/8" x 6 Spl.
102-7620	1 3/4" x 20 Spl.
102-7621	1 3/8" x 21 Spl.
102-7628	1 3/4" x 6 Spl.
102-7632	32 x 38 x 8

#### Cross & Bearing Kit (P-Kit)




##### Item Number

Item Number	Dim. "A" mm	Dim. "B" mm
200-7676	32.0	76.0

### Tractor Yokes

#### Safety Slide Lock

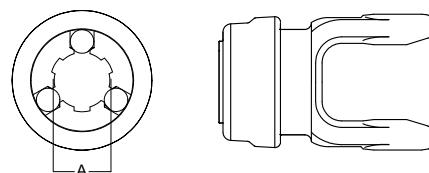


##### Item

Item Number	Dim. "A" Bore
101-7606	1 3/8" x 6 Spl.
101-7620	1 3/4" x 20 Spl.
101-7621	1 3/8" x 21 Spl.

### Tractor Yokes


#### Auto-Lok

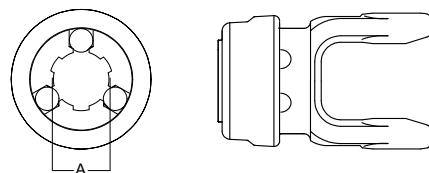

##### Item Number




Item Number	Dim. "A" Bore
110-7606	1 3/8" x 6 Spl.
110-7620	1 3/4" x 20 Spl.
110-7621	1 3/8" x 21 Spl.
110-7628	1 3/4" x 6 Spl.

#### Extended Lubrication Cross & Bearing Kit (E-Kit)





##### Item Number


Item Number	Dim. "A" mm	Dim. "B" mm
201-7676	32.0	76.0

**AW35 series****Inner Profile Yoke**


Item Number	Dim. "A" mm	Dim. "B" mm
300-7639 (lemon)	39	
300-7651 (star)		51

**Inner Tube**



Item Number	Dim. "A" mm	Dim. "B" mm	Length m
620-3905-100	39.5 (5.0 Wall)		1.0
630-5100-100		51.0	1.0
620-3905-150	39.5 (5.0 Wall)		1.5
630-5100-150		51.0	1.5
620-3905-000	39.5 (5.0 Wall)		3.0
630-5100-000		51.0	3.0

**Outer Tube**



Item Number	Dim. "A" mm	Dim. "B" mm	Length m
620-4804-100	48.0 (4.0 Wall)		1.0
630-6104-100		61.0 (4.0 Wall)	1.0
620-4804-150	48.0 (4.0 Wall)		1.5
630-6104-150		61.0 (4.0 Wall)	1.5
620-4804-000	48.0 (4.0 Wall)		3.0
630-6104-000		61.0 (4.0 Wall)	3.0

**Roll Pin**

Item Number	Dim. "A" mm	Dim. "B" mm
508-1085	10	85



**Outer Profile Yoke**

Item Number	Dim. "A" mm	Dim. "B" mm
300-7648 (lemon)	48	
300-7661 (star)		61

**Implement Yoke****Round Bore**



With Keyway &amp; Set Screw

Item Number	Dim. "A" Bore mm	Standard Keyway mm
800-7635	35	10
800-7640	40	12

**Implement Yoke****Clamp Type**



interfering

Item Number	Dim. "A" Bore
807-7606	1 3/8" x 6 Spl.

**Implement Yoke****Round Bore**

With Pin Hole

Item Number	Dim. "A" Bore mm
830-7635	35
830-7640	40

**Implement Yoke****Clamp Type**


interfering

With Keyway &amp; Set Screw

Item Number	Dim. "A" Bore mm	Standard Keyway mm
847-7635	35	10
847-7640	40	12


# AW35 series

## Universal Joint

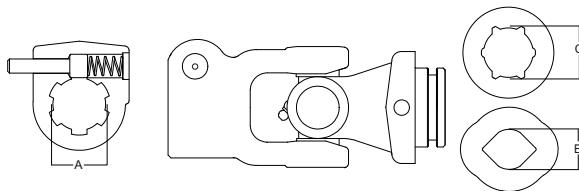

<b>Item Number</b>	<b>Quick Disconnect Dim. "A" Bore</b>	<b>Profile Yoke Dim. "B / C" mm</b>
3001-7606-00	1 3/8" x 6 Spl.	39 (inner, lemon)
3002-7606-00	1 3/8" x 6 Spl.	48 (outer, lemon)
3003-7606-00	1 3/8" x 6 Spl.	51 (inner, star)
3004-7606-00	1 3/8" x 6 Spl.	61 (outer, star)

## Guard (incl. Bearing Kit)

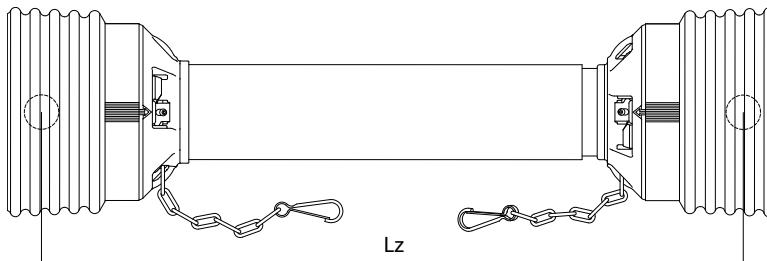

<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>
904-3500-046	460mm
904-3500-051	510mm
904-3500-056	560mm
904-3500-061	610mm
904-3500-071	710mm
904-3500-076	760mm
904-3500-081	810mm
904-3500-086	860mm
904-3500-101	1010mm
904-3500-121	1210mm
904-3500-136	1360mm


Assembly instructions guard, see page 7

## Easy Lock Replacement Kit




<b>Item Number</b>	<b>25-per Kit</b>
13001234	


## PTO drive shaft

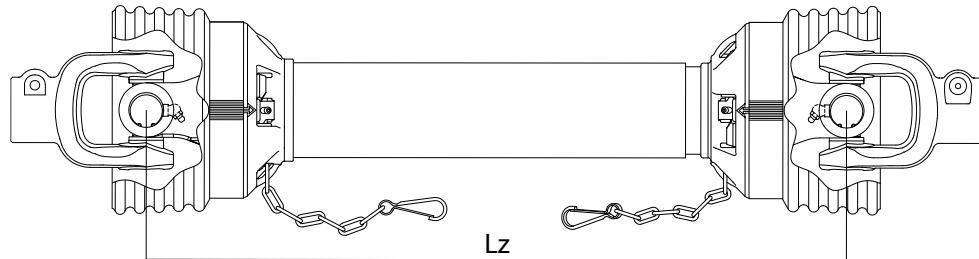

<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>	<b>Tractor Yoke</b>	<b>Implement Yoke</b>
1600-7600-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7600-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

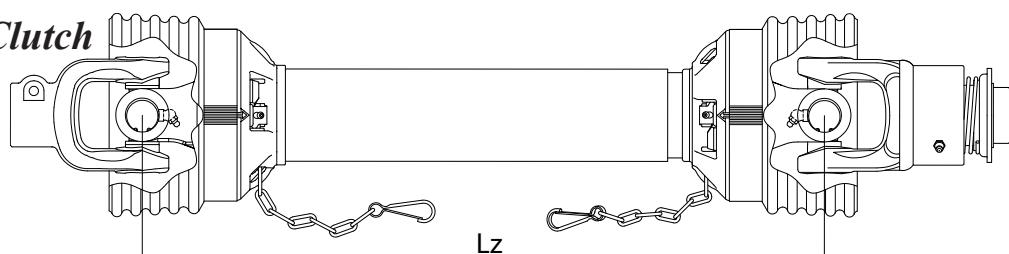**PTO drive shaft****with Overrunning Clutch****Clockwise**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-7600-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7600-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

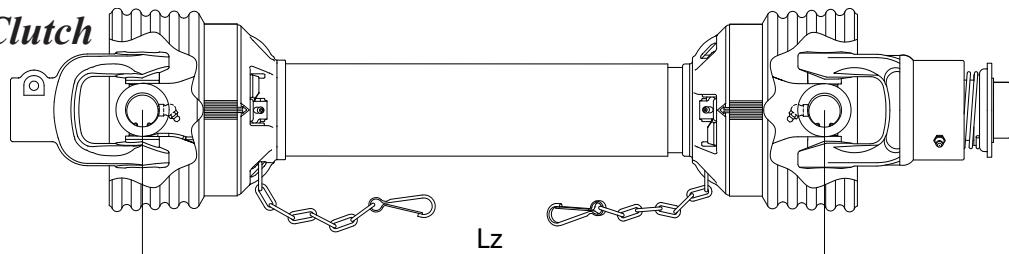**PTO drive shaft****with Overrunning Clutch****Counter Clockwise**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1631-7600-046	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-051	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-061	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-076	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise
1631-7600-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Counter Clockwise

## **AW35 series**

**PTO drive shaft  
with Ratchet Clutch  
900Nm**

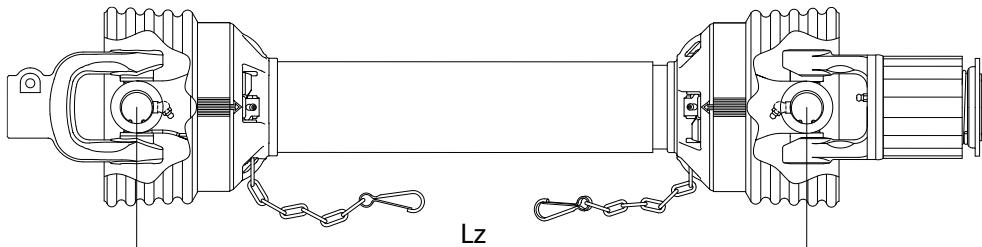

**Item  
Number**

**Compressed Length (Lz)  
center cross - center cross**


**Tractor Yoke**

**Implement Clutch**

**Torque (Nm)**

1620-7600-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1620-7600-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900

**PTO drive shaft  
with Ratchet Clutch  
1200Nm**

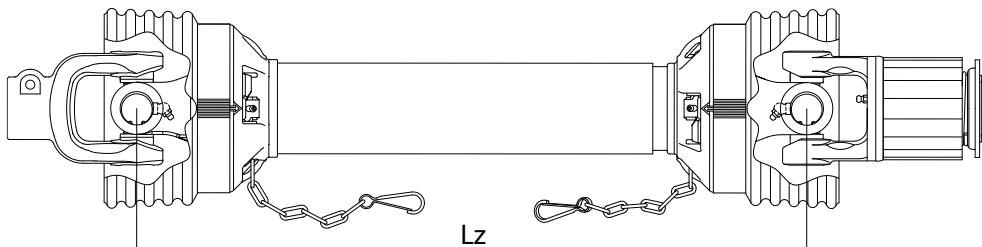

**Item  
Number**

**Compressed Length (Lz)  
center cross - center cross**


**Tractor Yoke**

**Implement Clutch**

**Torque (Nm)**

1620-7600-046 04	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-051 04	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-056 04	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-061 04	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-071 04	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-076 04	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-081 04	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-086 04	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-101 04	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-121 04	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200
1620-7600-136 04	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1200

**PTO drive shaft  
with Ratchet Clutch  
1500Nm**

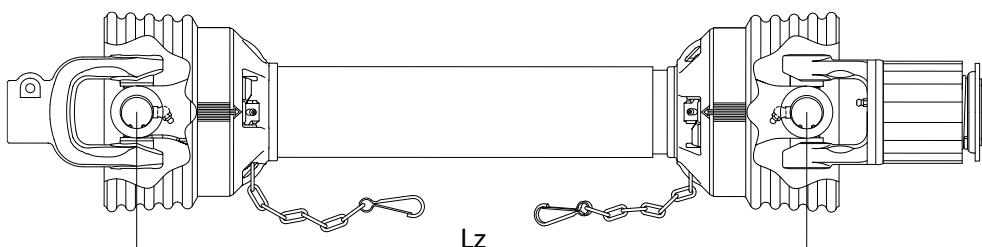

**Item  
Number**

**Compressed Length (Lz)  
center cross - center cross**


**Tractor Yoke**

**Implement Clutch**

**Torque (Nm)**


1620-7600-046 05	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-051 05	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-056 05	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-061 05	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-071 05	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-076 05	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-081 05	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-086 05	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-101 05	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-121 05	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500
1620-7600-136 05	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1500

**PTO drive shaft  
with Shear Bolt Clutch  
1860Nm**

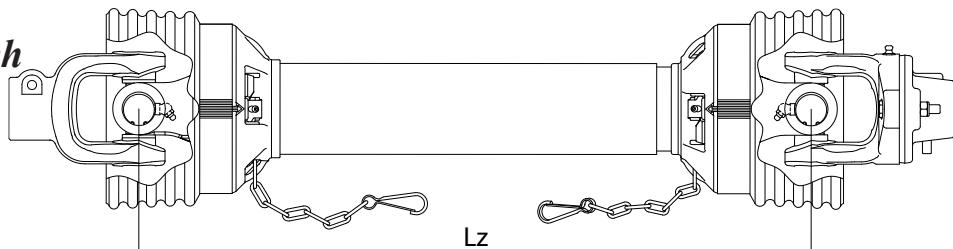

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-7600-046 19	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-051 19	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-056 19	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-061 19	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-071 19	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-076 19	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-081 19	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-086 19	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-101 19	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-121 19	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860
1680-7600-136 19	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	1860


**PTO drive shaft  
with Shear Bolt Clutch  
2120Nm**

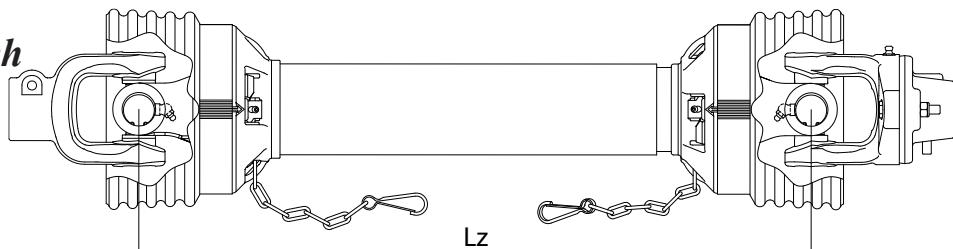

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-7600-046 20	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-051 20	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-056 20	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-061 20	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-071 20	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-076 20	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-081 20	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-086 20	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-101 20	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-121 20	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120
1680-7600-136 20	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2120


## AW35 series

**PTO drive shaft  
with Friction Clutch  
1250Nm**

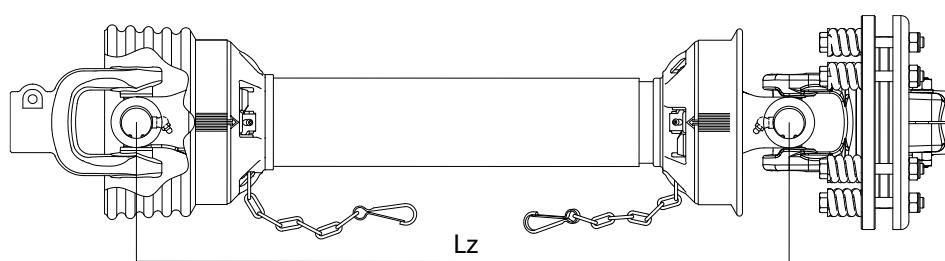


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-7653-046 07	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-051 07	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-056 07	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-061 07	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-071 07	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-076 07	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-081 07	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-086 07	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-101 07	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-121 07	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250
1610-7653-136 07	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1250

**PTO drive shaft  
with Friction Clutch  
1500Nm**

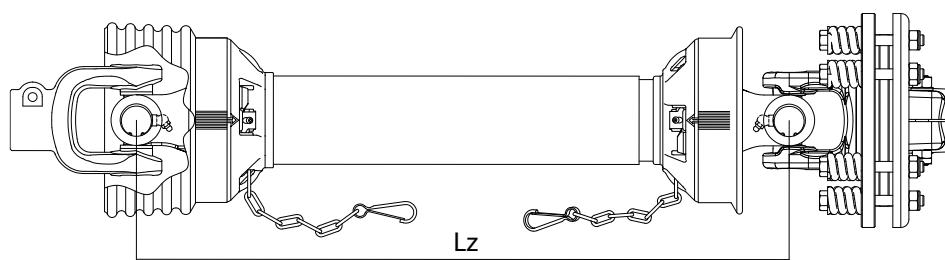


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-7653-046 05	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-051 05	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-056 05	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-061 05	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-071 05	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-076 05	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-081 05	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-086 05	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-101 05	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-121 05	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7653-136 05	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500

**PTO drive shaft  
with Friction Clutch  
2000Nm**

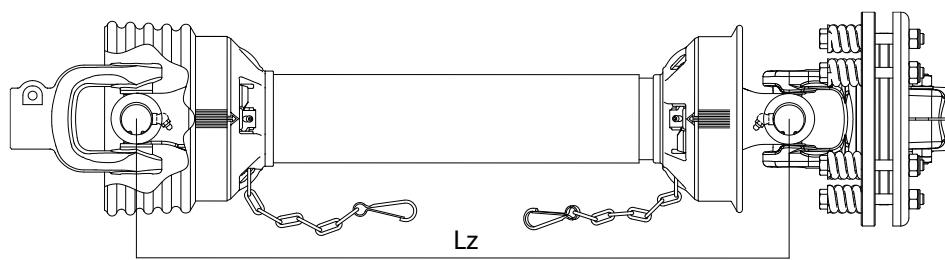


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-7653-046 08	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-051 08	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-056 08	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-061 08	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-071 08	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-076 08	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-081 08	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-086 08	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-101 08	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-121 08	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7653-136 08	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000

**PTO drive shaft  
with Overrunning  
Friction Clutch  
900Nm**

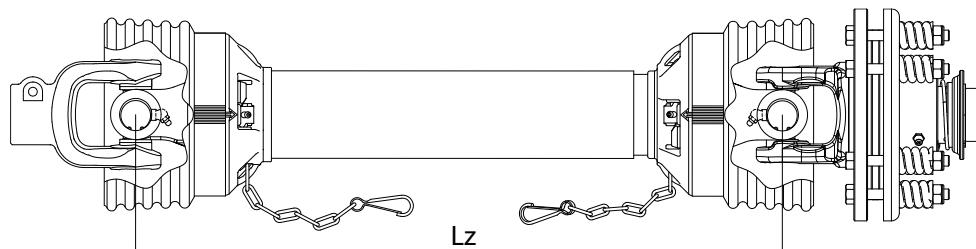

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-7600-046 03	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-051 03	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-056 03	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-061 03	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-071 03	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-076 03	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-081 03	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-086 03	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-101 03	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-121 03	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900
1611-7600-136 03	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	900


**PTO drive shaft  
with Overrunning  
Friction Clutch  
1250Nm**

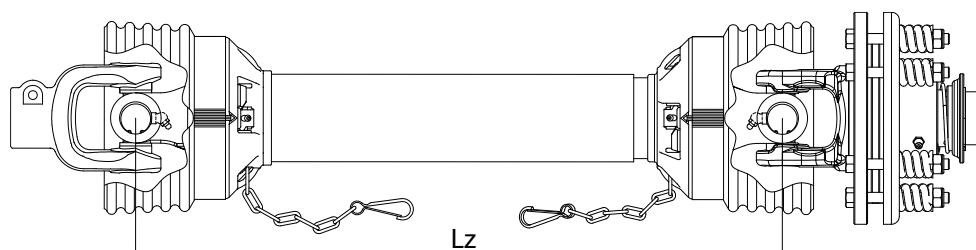



Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1611-7600-046 07	460mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-051 07	510mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-056 07	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-061 07	610mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-071 07	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-076 07	760mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-081 07	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-086 07	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-101 07	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-121 07	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250
1611-7600-136 07	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	1250

## AW36 series

### Tractor Yoke

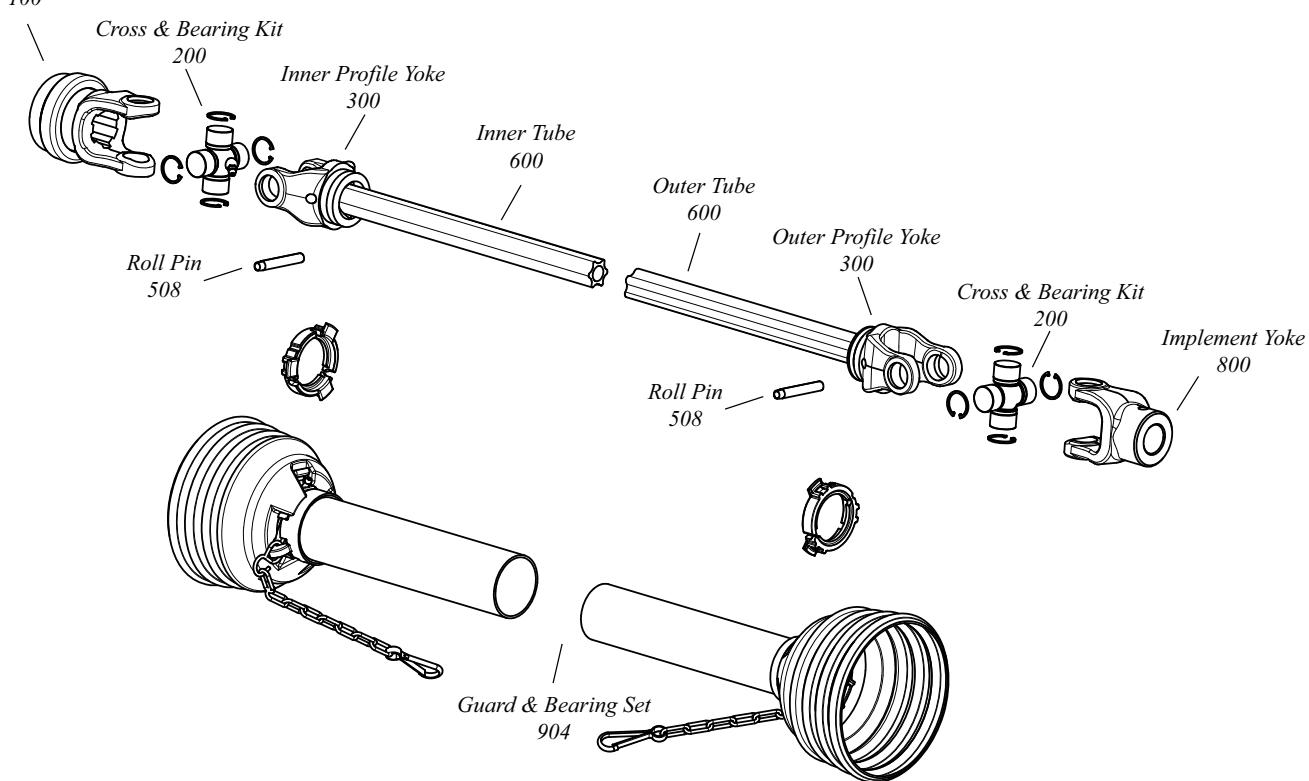

### Tractor Yokes



#### Quick Disconnect Pin

##### Item Number

102-7906

##### Dim. "A" Bore

1 3/8" x 6 Spl.

102-7920

1 3/4" x 20 Spl.


102-7921

1 3/8" x 21 Spl.



102-7928

1 3/4" x 6 Spl.

### Cross & Bearing Kit (P-Kit)



### Tractor Yokes



#### Safety Slide Lock

##### Item Number

101-7906

##### Dim. "A" Bore

1 3/8" x 6 Spl.



101-7920

1 3/4" x 20 Spl.

101-7921

1 3/8" x 21 Spl.

### Tractor Yokes



#### Auto-Lok

##### Item Number

110-7906

##### Dim. "A" Bore

1 3/8" x 6 Spl.

110-7920

1 3/4" x 20 Spl.


110-7921




1 3/8" x 21 Spl.

110-7928




1 3/4" x 6 Spl.

### Extended Lubrication Cross & Bearing Kit (E-Kit)





**Inner Profile Yoke**

Item Number	Dim. "A" mm	Dim. "B" mm
300-7939 (lemon)	39	
300-7951 (star)		51

**Outer Profile Yoke**



Item Number	Dim. "A" mm	Dim. "B" mm
300-7948 (lemon)	48	
300-7961 (star)		61

**Inner Tube**



Item Number	Dim. "A" mm	Dim. "B" mm	Length m
620-3905-100	39.5 (5.0 Wall)	1.0	
630-5100-100		51.0	1.0
620-3905-150	39.5 (5.0 Wall)	1.5	
630-5100-150		51.0	1.5
620-3905-000	39.5 (5.0 Wall)	3.0	
630-5100-000		51.0	3.0

**Implement Yoke****Clamp Type**




interfering



Item Number	Dim. "A" Bore
807-7920	1 3/4" x 20 Spl.
807-7928	1 3/4" x 6 Spl.

**Outer Tube**

Item Number	Dim. "A" mm	Dim. "B" mm	Length m
620-4804-100	48.0 (4.0 Wall)	1.0	
630-6104-100		61.0 (4.0 Wall)	1.0
620-4804-150	48.0 (4.0 Wall)	1.5	
630-6104-150		61.0 (4.0 Wall)	1.5
620-4804-000	48.0 (4.0 Wall)	3.0	
630-6104-000		61.0 (4.0 Wall)	3.0

**Universal Joint**

Item Number	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B / C" mm
3001-7906-00	1 3/8" x 6 Spl.	51 (inner, star)
3002-7906-00	1 3/8" x 6 Spl.	61 (outer, star)
3003-7906-00	1 3/8" x 6 Spl.	39 (inner, lemon)
3004-7906-00	1 3/8" x 6 Spl.	48 (outer, lemon)


**Roll Pin**

B

Item Number	Dim. "A" mm	Dim. "B" mm
508-1085	10	85

## AW36 series

### **Guard (incl. Bearing Kit)**

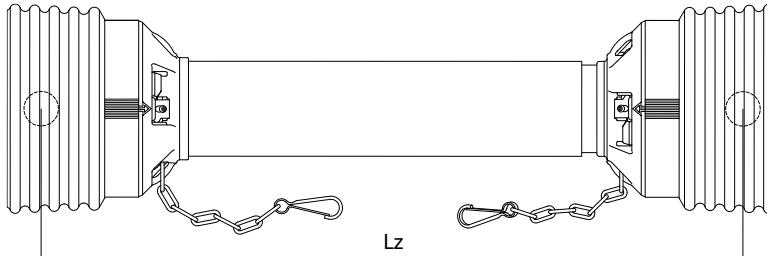

Item Number	Compressed Length (Lz) center cross - center cross
904-3600-056	560mm
904-3600-071	710mm
904-3600-081	810mm
904-3600-086	860mm
904-3600-101	1010mm
904-3600-121	1210mm
904-3600-136	1360mm


Assembly instructions guard, see page 7

### **Easy Lock Replacement Kit**




Item Number	25-per Kit
13001234	

### **PTO drive shaft**

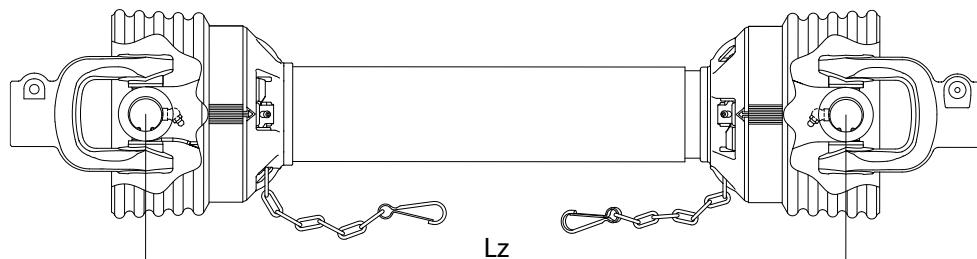


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-7900-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7900-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7900-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7900-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7900-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7900-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7900-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

**PTO drive shaft  
with Overrunning Clutch  
Clockwise**

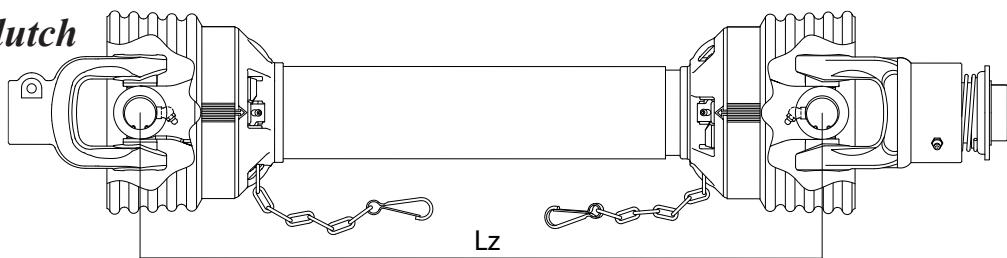


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Direction
1630-7900-056	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7900-071	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7900-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7900-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7900-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7900-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise
1630-7900-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QDSL	Clockwise

**PTO drive shaft  
with Shear Bolt Clutch  
2920Nm**

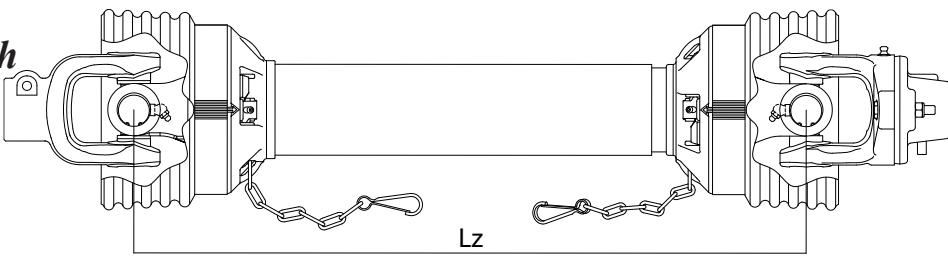

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-7900-056 22	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-7900-071 22	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-7900-081 22	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-7900-086 22	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-7900-101 22	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-7900-121 22	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920
1680-7900-136 22	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	2920


**PTO drive shaft  
with Shear Bolt Clutch  
3330Nm**

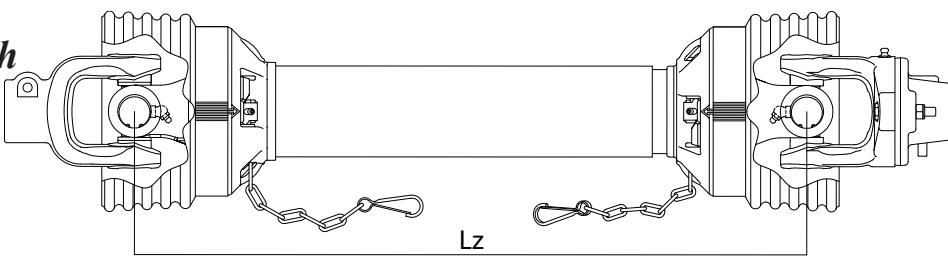

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1680-7900-056 23	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330
1680-7900-071 23	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330
1680-7900-081 23	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330
1680-7900-086 23	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330
1680-7900-101 23	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330
1680-7900-121 23	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330
1680-7900-136 23	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD	3330


## AW36 series

**PTO drive shaft  
with Friction Clutch  
1500Nm**

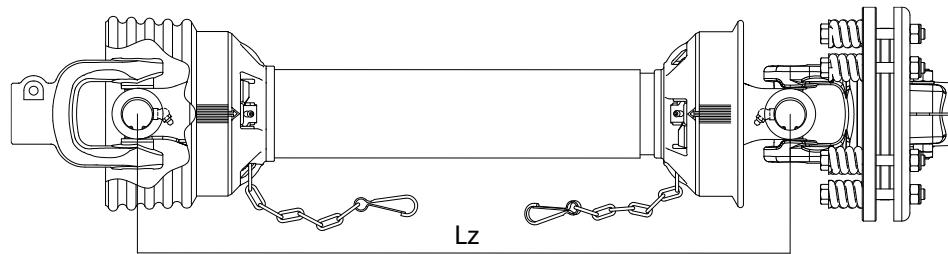

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-7953-056 05	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7953-071 05	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7953-081 05	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7953-086 05	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7953-101 05	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7953-121 05	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500
1610-7953-136 05	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	1500


**PTO drive shaft  
with Friction Clutch  
2000Nm**

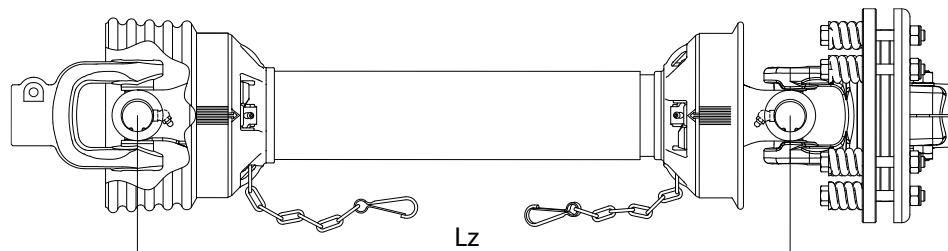

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Clutch	Torque (Nm)
1610-7953-056 08	560mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7953-071 08	710mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7953-081 08	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7953-086 08	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7953-101 08	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7953-121 08	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000
1610-7953-136 08	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. CBI	2000



## Tractor Yoke

100

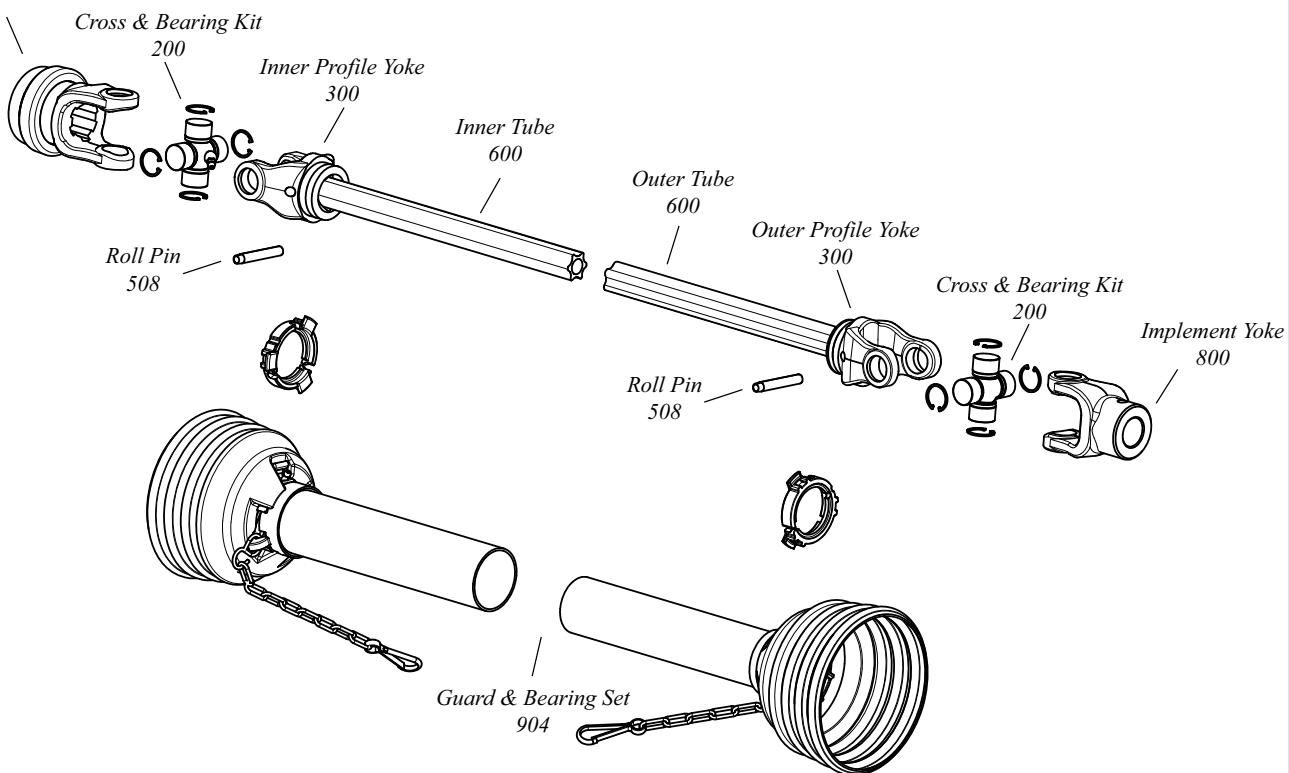


## Tractor Yokes

## Quick Disconnect Pin





Item Number	Dim. "A" Bore
102-7006	1 3/8" x 6 Spl.
102-7020	1 3/4" x 20 Spl.
102-7021	1 3/8" x 21 Spl.
102-7028	1 3/4" x 6 Spl.

Cross & Bearing Kit  
(P-Kit)


Item Number	Dim. "A"	Dim. "B"
200-7004	mm 42.0	mm 104.0

## Tractor Yokes

## Safety Slide Lock





Item Number	Dim. "A" Bore
101-7006	1 3/8" x 6 Spl.
101-7020	1 3/4" x 20 Spl.

Extended Lubrication  
Cross & Bearing Kit  
(E-Kit)

Item Number	Dim. "A"	Dim. "B"
201-7004	mm 42.0	mm 104.0



## Auto-Lok



Item Number	Dim. "A" Bore
110-7006	1 3/8" x 6 Spl.
110-7020	1 3/4" x 20 Spl.
110-7021	1 3/8" x 21 Spl.
110-7028	1 3/4" x 6 Spl.

# AW26 series

## Inner Profile Yoke


**Item Number**



300-7051	Dim. "A" mm	51
300-7061		61

**Dim. "A" mm**

51

61

## Outer Profile Yoke


**Item Number**

300-7071	Dim. "A" mm	71
----------	-------------	----


**Dim. "A" mm**

71

## Inner Tube



Dim. "A" 61.0mm  
Wall 6.0mm


**Item Number**

630-6106-100	Length m	1.0
630-6106-150		1.5
630-6106-000		3.0

**Length m**

1.0



1.5

3.0

## Implement Yoke

**Clamp Type**

interfering


**Item Number**

807-7028	Dim. "A" Bore	1 3/4" x 6 Spl.
----------	---------------	-----------------

## Roll Pin


**Item Number**

508-1310	Dim. "A" mm	13
	Dim. "B" mm	100




**Dim. "A" mm**

13

**Dim. "B" mm**

100

## Universal Joint


**Item Number**

3001-7006-00	Quick Disconnect Dim. "A" Bore	1 3/8" x 6 Spl.
3002-7006-00		61 (inner)

**Quick Disconnect Dim. "A" Bore**

1 3/8"

x 6

Spl.

**Profile Yoke Dim. "B" mm**


61

(inner)

## Outer Tube



Dim. "A" 71.5mm  
Wall 5.0mm


**Item Number**

630-7105-100	Length m	1.0
630-7105-150		1.5
630-7105-000		3.0


**Length m**

1.0

1.5

3.0

## **Guard (incl. Bearing Kit)**

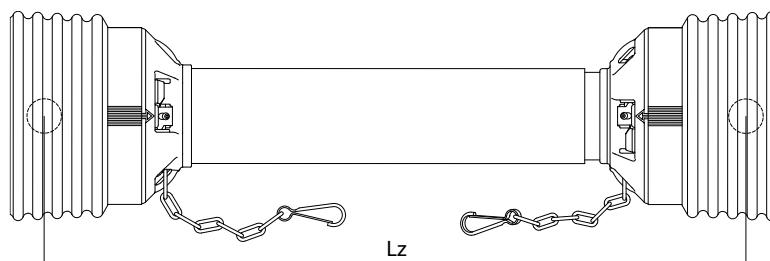

Item Number	Compressed Length (Lz) center cross - center cross
904-4500-081	810mm
904-4500-086	860mm
904-4500-101	1010mm
904-4500-121	1210mm
904-4500-136	1360mm


Assembly instructions guard, see page 7

## **Easy Lock Replacement Kit**



Item Number	25-per Kit
13001234	

## **PTO drive shaft**

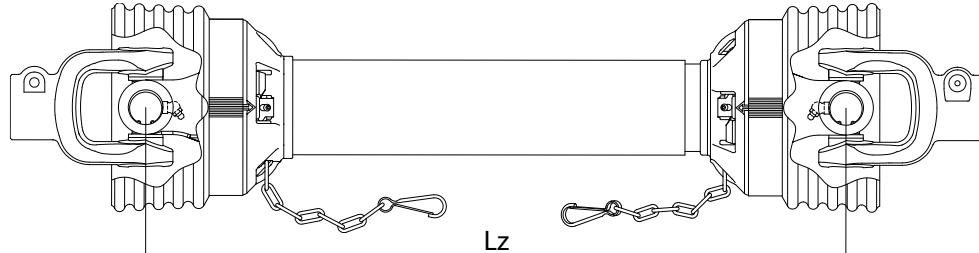


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1600-7000-081	810mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7000-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7000-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7000-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1600-7000-136	1360mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

## Miscellaneous AW series


### AW11, AW12, AW22, AW23 & AW24

#### Tractor Yoke

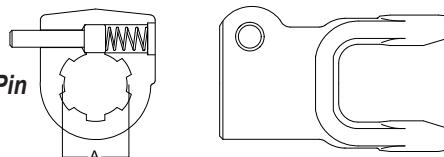**Quick Disconnect Pin**


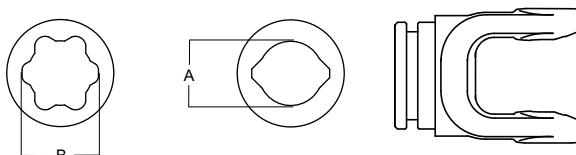
Item Number	AW series	Dim. "A"
		Bore
102-7806	AW12	1 3/8" x 6 Spl.
102-8706	AW23	1 3/8" x 6 Spl.
102-8720	AW23	1 3/4" x 20 Spl.
102-8721	AW23	1 3/8" x 21 Spl.
102-8728	AW23	1 3/4" x 6 Spl.

#### Inner Profile Yoke

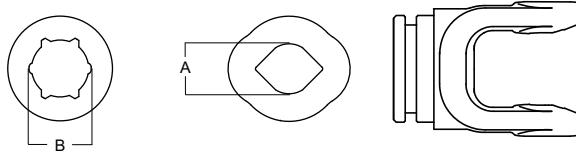


Item Number	AW series	Dim. "A" mm	Dim. "B" mm
300-7334 (lemon)	AW11	34	
300-7851 (star)	AW12		51
300-8539 (lemon)	AW22	39	
300-8551 (star)	AW22		51
300-8951 (star)	AW23		52
300-8851 (star)	AW24		51

#### Outer Profile Yoke



Item Number	AW series	Dim. "A" mm	Dim. "B" mm
300-7341 (lemon)	AW11	41	
300-7861 (star)	AW12		61
300-8548 (lemon)	AW22	48	
300-8561 (star)	AW22		61
300-8961 (star)	AW23		61
300-8861 (star)	AW24		61

#### Universal Joint

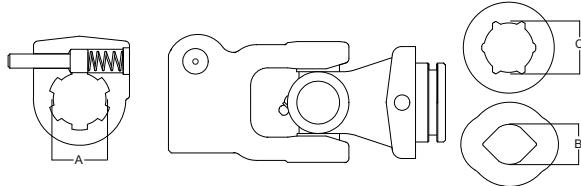

Item Number	AW series	Quick Disconnect Dim. "A" Bore	Profile Yoke Dim. "B / C" mm
3001-7306-00	AW11	1 3/8" x 6 Spl.	34 (inner, lemon)
3002-7306-00	AW11	1 3/8" x 6 Spl.	41 (outer, lemon)
3001-8506-00	AW22	1 3/8" x 6 Spl.	39 (inner, lemon)
3002-8506-00	AW22	1 3/8" x 6 Spl.	48 (outer, lemon)
3001-8906-00	AW23	1 3/8" x 6 Spl.	51 (inner, star)
3002-8906-00	AW23	1 3/8" x 6 Spl.	61 (outer, star)
3001-8806-00	AW24	1 3/8" x 6 Spl.	51 (inner, star)
3002-8806-00	AW24	1 3/8" x 6 Spl.	61 (outer, star)




Weasler®

# 88° CONSTANT VELOCITY PTO DRIVE SHAFTS & COMPONENTS


CV-Series

# AB4 and AW21 series

## 80° European Constant Velocity

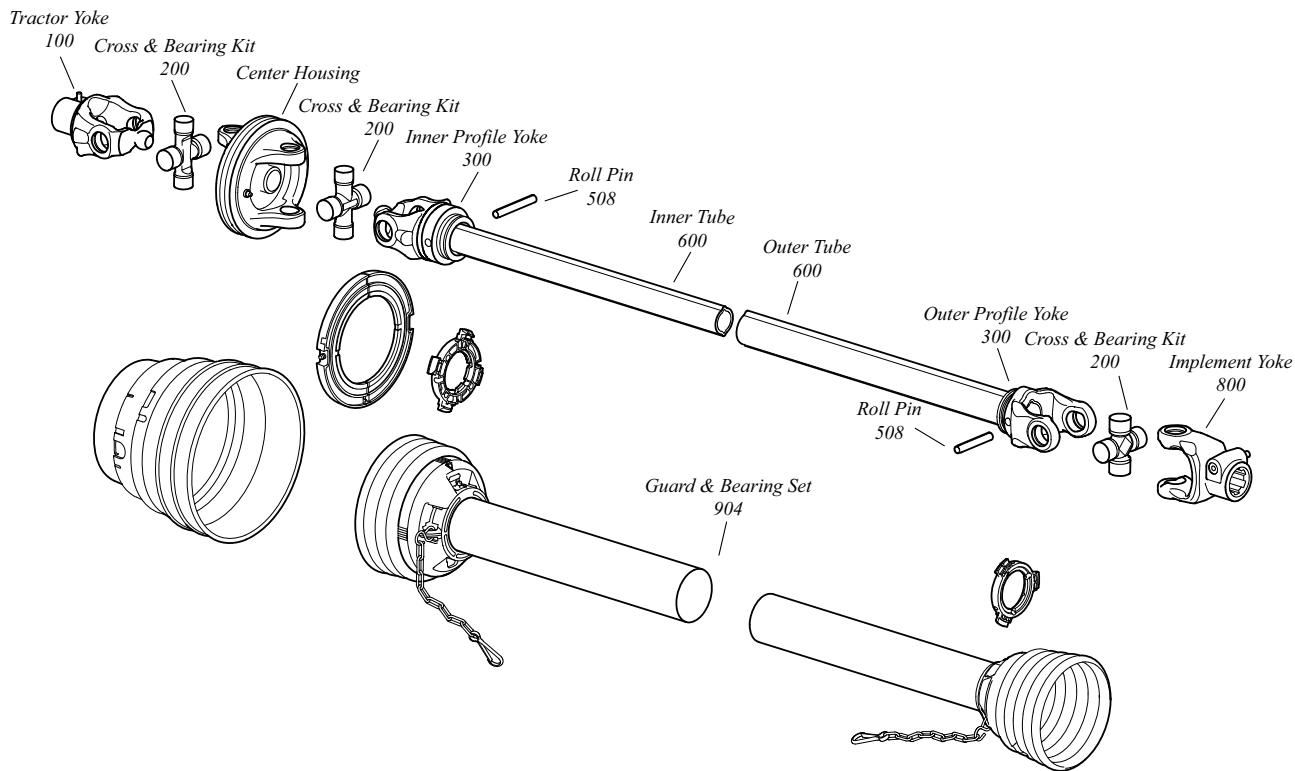

**Cross & Bearing Kit**  
(P-Kit, standard for these series)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
200-7491	24	75	91	27


### Tractor Yoke

Quick Disconnect Pin	
Item Number	Dim. "A" Bore
109-8406	1 3/8" x 6 Spl.
109-8421	1 3/8" x 21 Spl.

### Tractor Yoke

Safety Slide Lock	
Item Number	Dim. "A" Bore
107-8406	1 3/8" x 6 Spl.

**Extended Lubrication Cross & Bearing Kit**  
(E-Kit)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
201-7491	24	75	91	27

### Tractor Yoke

Auto-Lok	
Item Number	Dim. "A" Bore
111-8406	1 3/8" x 6 Spl.



### Center Housing

Item Number
305-7400

# AB4 and AW21 series

## 80° European Constant Velocity



### Inner Profile Yoke (for AB4)



Item  
Number  
301-6436

Dim. "A"  
mm  
36

### Inner Profile Yoke (for AW21)




item  
Number  
301-7434

Dim. "A"  
mm  
34

### Inner Tube (for AB4)

Dim. "A" 36.5mm  
Wall 4.2mm  
Rilsan Coating





Item  
Number  
611-3604-100  
611-3604-150

Length  
m  
1.0  
1.5

### Inner Tube (for AW21)

Dim. "A" 35.0mm  
Wall 4.2mm  
Rilsan Coating




Item  
Number  
621-3404-100  
621-3404-150

Length  
m  
1.0  
1.5

### Outer Tube (for AB4)

Dim. "A" 43.5mm  
Wall 3.2mm  
Special, for rilsan tube





Item  
Number  
612-4303-100  
612-4303-150  
612-4303-000

Length  
m  
1.0  
1.5  
3.0

### Outer Tube (for AW21)


Dim. "A" 41.0mm  
Wall 2.7mm  
Special, for rilsan tube



Item  
Number  
622-4103-100  
622-4103-150  
622-4103-000

Length  
m  
1.0  
1.5  
3.0

### Roll Pin




Item  
Number  
508-1065

Dim. "A"  
mm  
10

Dim. "B"  
mm  
65

### 80° EUCV Joint

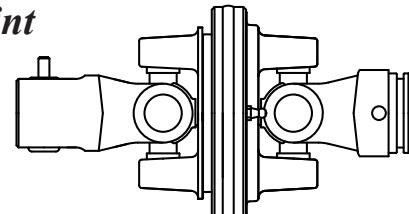

#### AB4

Item Number	Bore	Side
1551-6406-00 (P-Kit)	1 3/8" x 6 Spl. QD	Tractor
1559-6406-00 (P-Kit)	1 3/8" x 6 Spl. SSL	Tractor
1552-6406-00 (P-Kit)	1 3/8" x 6 Spl. QD	Implement


#### AW21

Item Number	Bore	Side
1551-7406-00 (P-Kit)	1 3/8" x 6 Spl. QD	Tractor
1559-7406-00 (P-Kit)	1 3/8" x 6 Spl. SSL	Tractor
1552-7406-00 (P-Kit)	1 3/8" x 6 Spl. QD	Implement

# AB4 and AW21 series


## 80° European Constant Velocity

### Guard (incl. Bearing Kit)

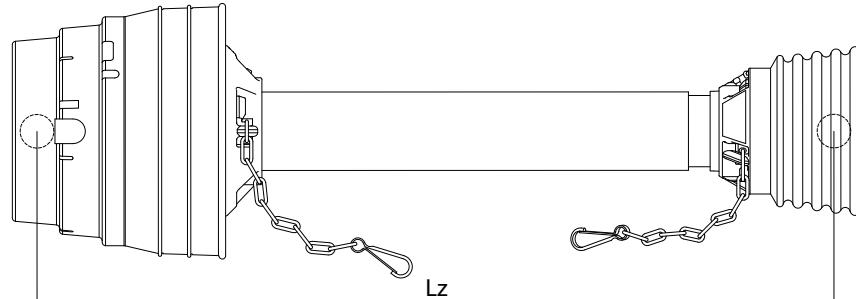

Item Number	Compressed Length (Lz) center cross - center cross
944-2500-086	860mm
944-2500-101	1010mm
944-2500-121	1210mm

### PTO drive shaft

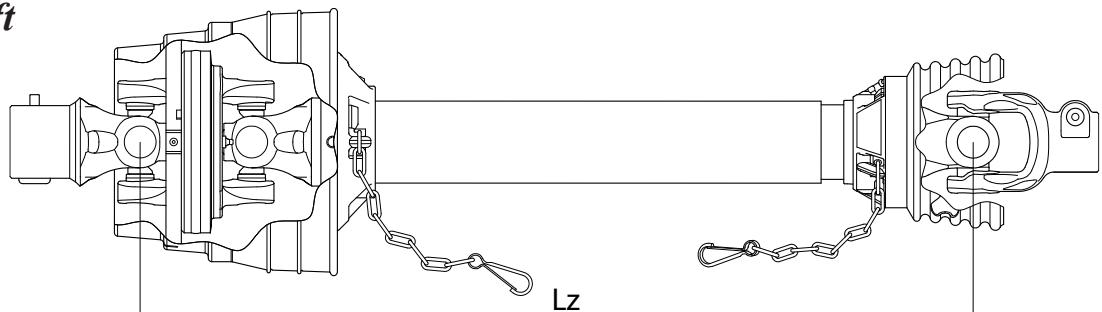

### 80° EUCV AB4 series With Cross & Bearing P-Kit


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1850-6400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-6400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-6400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

### 80° EUCV AW21 series With Cross & Bearing P-Kit


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1850-7400-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-7400-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-7400-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

# AB6 and AW35 series

## 80° European Constant Velocity

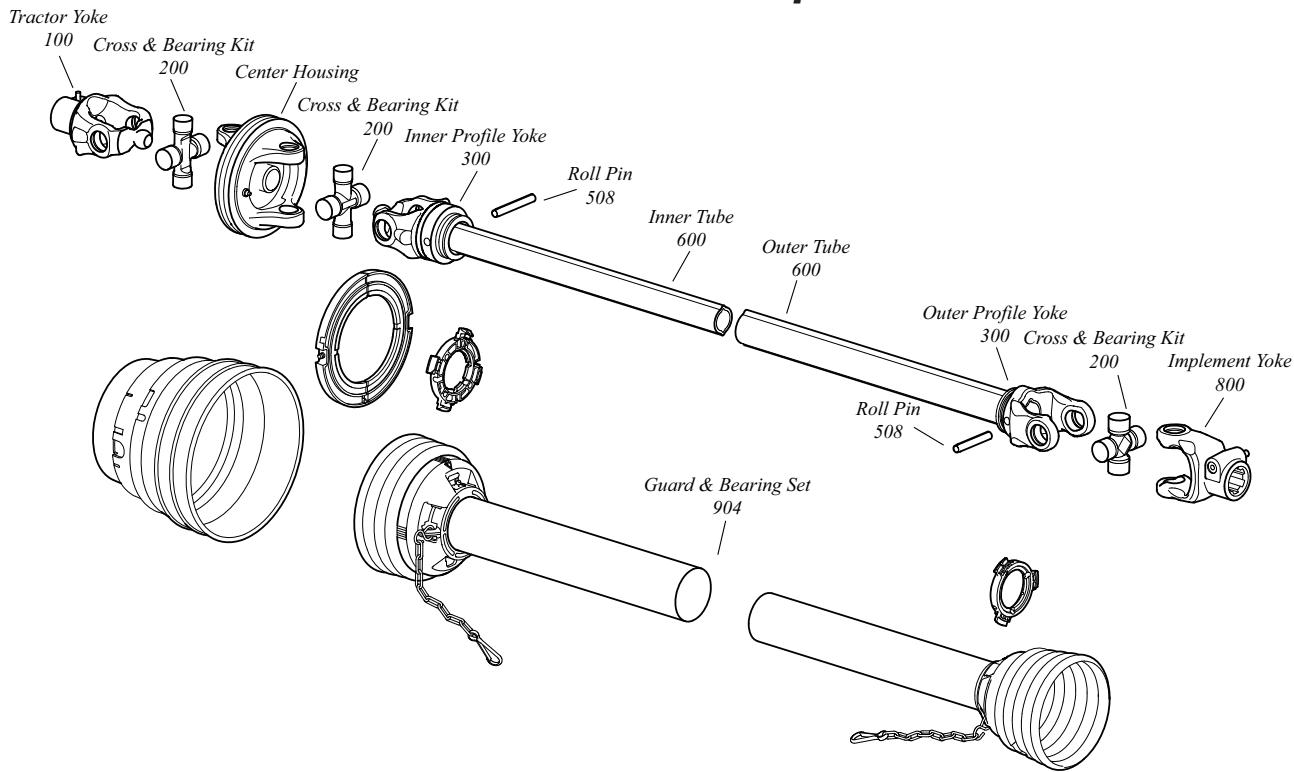


### **Extended Lubrication Cross & Bearing Kit (E-Kit, standard for AB6)**




Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
201-7694	27	76	94	32

### **Tractor Yoke**



### **Safety Slide Lock**





Item  
Number

107-7606  
107-7621

Dim. "A" Bore  
1 3/8" x 6 Spl.  
1 3/8" x 21 Spl.

### **Tractor Yoke**




### **Quick Disconnect Pin**

Item  
Number

109-7606  
109-7621



Dim. "A" Bore  
1 3/8" x 6 Spl.  
1 3/8" x 21 Spl.

### **Cross & Bearing Kit (P-Kit, standard for AW35)**



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
200-7694	27	76	94	32

### **Tractor Yoke**




### **Auto-Lok**

Item  
Number

111-7606

Dim. "A" Bore  
1 3/8" x 6 Spl.

### **Center Housing**




Item  
Number

305-7600

# AB6 and AW35 series


## 80° European Constant Velocity

### Inner Profile Yoke (for AB6)

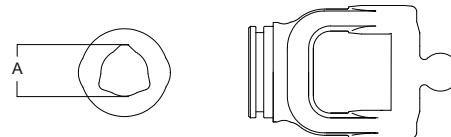

Item Number	Dim. "A" mm
301-6645	45


### Inner Tube (for AB6)



Dim. "A" 45.0mm  
Wall 4.1mm  
Rilsan Coating

Item Number	Length m
611-4504-100	1.0
611-4504-150	1.5

### Outer Tube (for AB6)

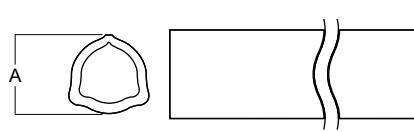

Dim. "A" 54.0mm  
Wall 4.3mm  
Special, for rilsan tube


Item Number	Length m
612-5404-100	1.0
612-5404-150	1.5
612-5404-000	3.0

### Roll Pin




Item Number	Dim. "A" mm	Dim. "B" mm
508-1080	10	80

### Inner Profile Yoke (for AW35)

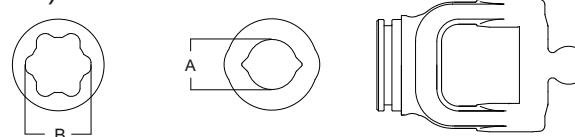


Item Number	Dim. "A" mm	Dim. "B" mm
301-7639 (lemon)	39	
301-7651 (star)		51

### Inner Tube (for AW35)

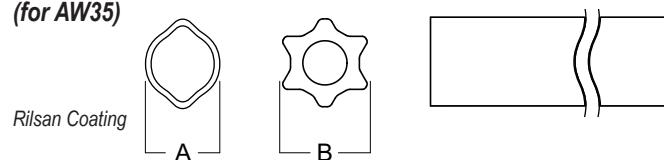


Item Number	Dim. "A" mm	Dim. "B" mm	Length m
621-3905-100 (lemon)	40.0 (4.8 Wall)		1.0
631-5100-100 (star)		51.5	1.0
621-3905-150 (lemon)	40.0 (4.8 Wall)		1.5
631-5100-150 (star)		51.5	1.5

### Outer Tube (for AW35)

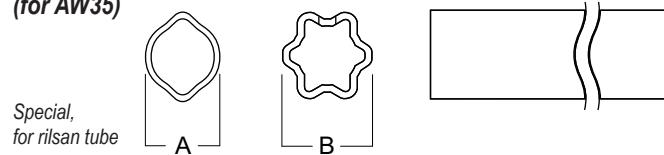

Item Number	Dim. "A" mm	Dim. "B" mm	Length m
622-4804-100 (lemon)	48.0 (3.6 Wall)		1.0
632-6104-100 (star)		61.0 (4.0 Wall)	1.0
622-4804-150 (lemon)	48.0 (3.6 Wall)		1.5
632-6104-150 (star)		61.0 (4.0 Wall)	1.5

### 80° EUCV Joint

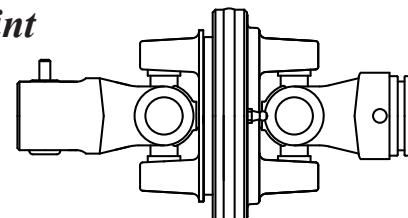

#### AB6

Item Number	Bore	Side
1551-6606-00 (E-Kit)	1 3/8" x 6 Spl. QD	Tractor
1559-6606-00 (E-Kit)	1 3/8" x 6 Spl. SSL	Tractor
1552-6606-00 (E-Kit)	1 3/8" x 6 Spl. QD	Implement


#### AW35

Item Number	Bore	Side (tube)
1551-7606-00 (P-Kit)	1 3/8" x 6 Spl. QD	Tractor (lemon)
1559-7606-00 (P-Kit)	1 3/8" x 6 Spl. SSL	Tractor (lemon)
1552-7606-00 (P-Kit)	1 3/8" x 6 Spl. QD	Implement (lemon)
1553-7606-00 (P-Kit)	1 3/8" x 6 Spl. QD	Tractor (star)

# AB6 and AW35 series


## 80° European Constant Velocity

### **Guard (incl. Bearing Kit)**

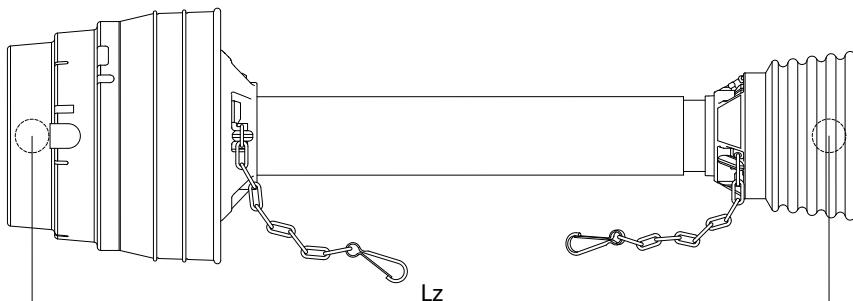

Item Number	Compressed Length (Lz) center cross - center cross
944-3500-086	860mm
944-3500-101	1010mm
944-3500-121	1210mm

### **PTO drive shaft**

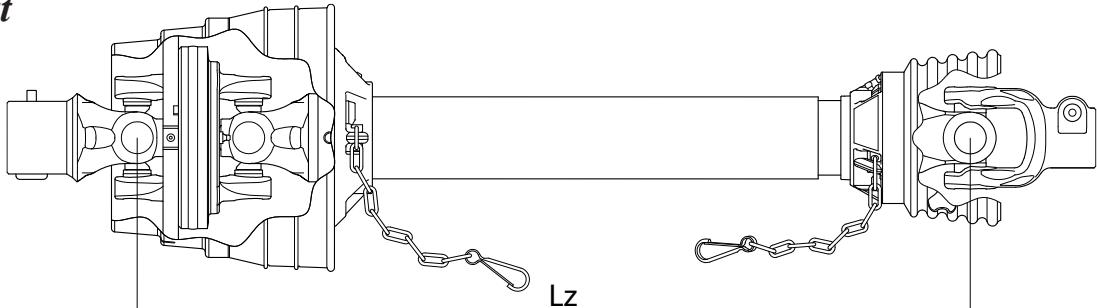

### **80° EUCV AB6 series With Cross & Bearing E-Kit**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1850-6600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-6600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-6600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

### **80° EUCV AW35 series With Cross & Bearing P-Kit**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1850-7600-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-7600-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1850-7600-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

# AW36 series

## 80° European Constant Velocity

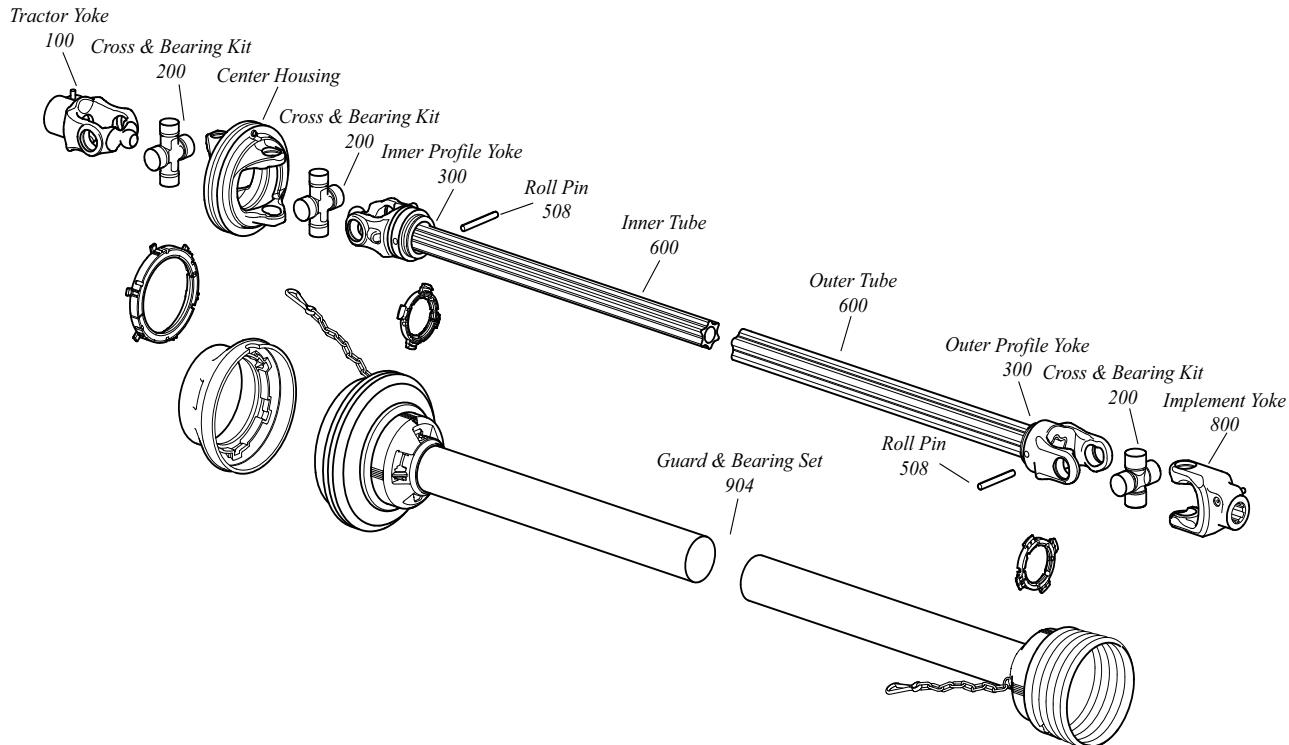

**Cross & Bearing Kit**  
(P-Kit, standard for this series)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
200-7906	32	89	106	36


### Tractor Yoke

Quick Disconnect Pin	
Item Number	Dim. "A" Bore
109-7906	1 3/8" x 6 Spl.
109-7921	1 3/8" x 21 Spl.

### Tractor Yoke

Safety Slide Lock	
Item Number	Dim. "A" Bore
107-7906	1 3/8" x 6 Spl.
107-7920	1 3/4" x 20 Spl.
107-7921	1 3/8" x 21 Spl.

**Extended Lubrication Cross & Bearing Kit**  
(E-Kit)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
201-7906	32	89	106	36

### Tractor Yoke

Auto-Lok	
Item Number	Dim. "A" Bore
111-7906	1 3/8" x 6 Spl.
111-7920	1 3/4" x 20 Spl.

### Center Housing



Item Number	305-7900

# AW36 series

## 80° European Constant Velocity

### **Inner Profile Yoke**

(for AW36)



Item  
Number



301-7951

Dim. "A"  
mm

51

### **Inner Tube**

(for AW36)



Dim. "A" 51mm  
Rilsan Coating

Item

Number

631-5100-100


Length  
m

1.0

631-5100-150

1.5

### **Roll Pin**



Item  
Number

508-1080

Dim. "A"  
mm



10

Dim. "B"  
mm

80

### **Outer Tube**

(for AW36)



Dim. "A" 61mm  
Special, for rilsan tube

Item

Number

632-6104-100


Length  
m

1.0

632-6104-150

1.5

### **80° EUCV Joint**

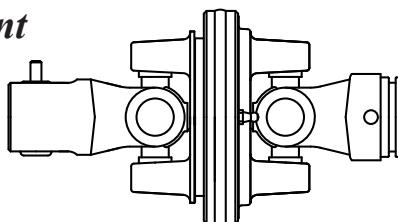

**AW36**

Item  
Number

1551-7906-00 (P-Kit)

Bore

1 3/8" x 6 Spl. QD

Side

Tractor

1559-7906-00 (P-Kit)

1 3/8" x 6 Spl. SSL


Tractor

1552-7906-00 (P-Kit)

1 3/8" x 6 Spl. QD

Implement

### **Guard (incl. Bearing Kit)**

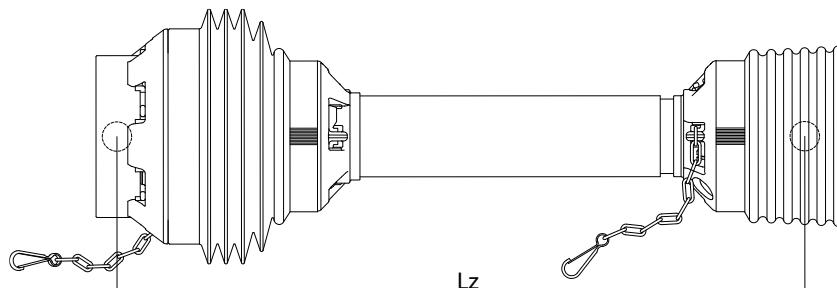

Item  
Number

934-3600-086

Compressed Length (Lz)  
center cross - center cross

860mm

934-3600-101

1010mm


934-3600-121

1210mm

## **AW36 series**

### **80° European Constant Velocity**

#### **PTO drive shaft**

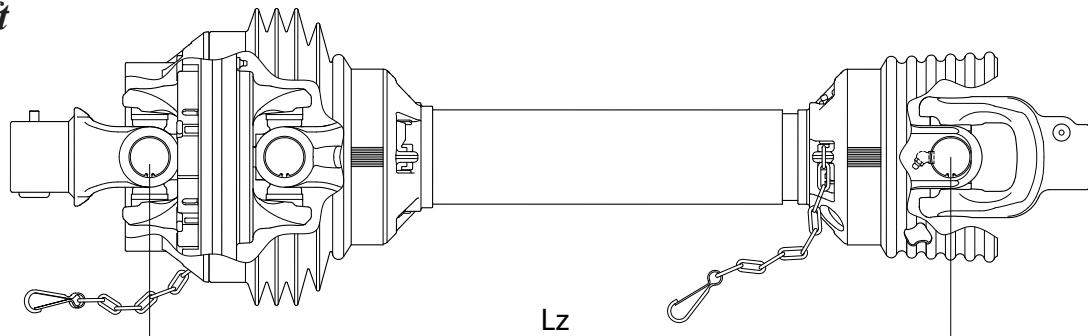

**80° EUCV**


**AW36 series**

**With Cross & Bearing P-Kit**


<b>Item Number</b>	<b>Compressed Length (Lz) center cross - center cross</b>	<b>Tractor Yoke</b>	<b>Implement Yoke</b>
1870-7900-086	860mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1870-7900-101	1010mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD
1870-7900-121	1210mm	1 3/8" x 6 Spl. QD	1 3/8" x 6 Spl. QD

# CATEGORY 2, AB2 and AW20 series

## 80° World Wide Constant Velocity

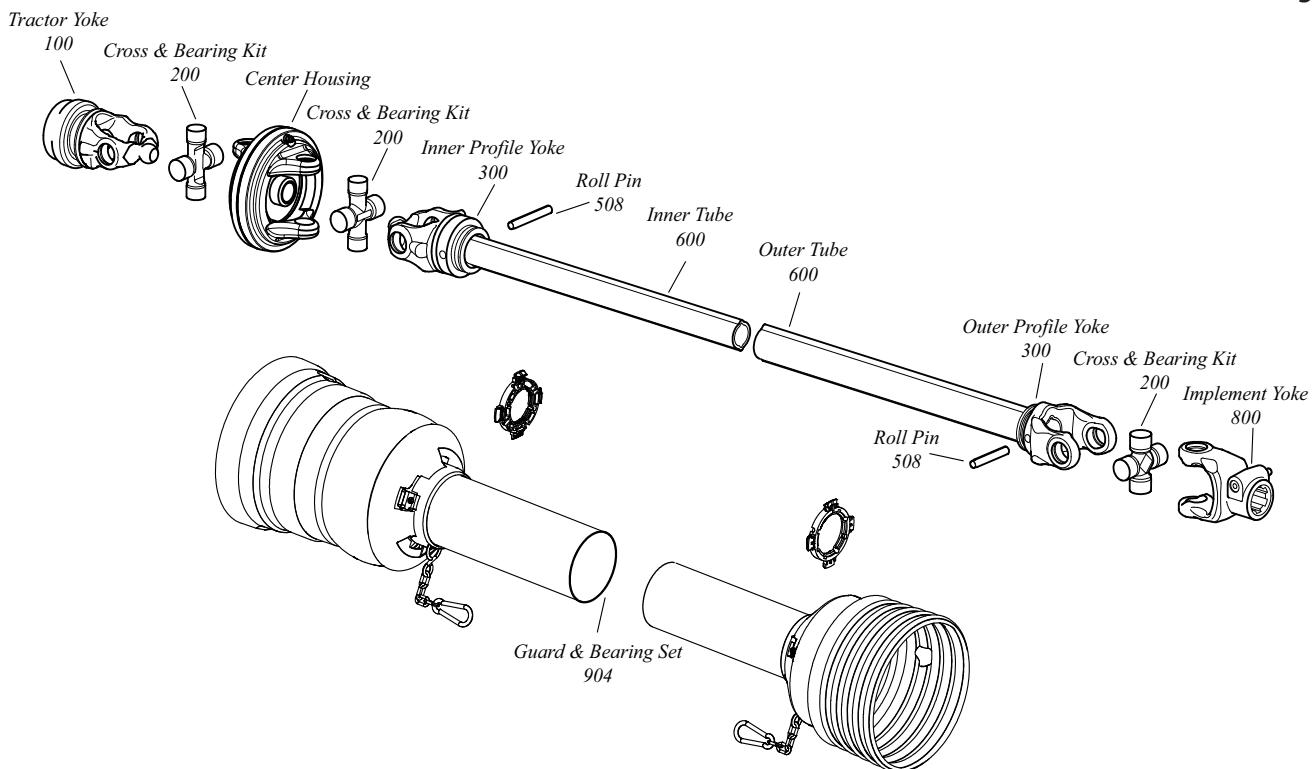


**Cross & Bearing Kit**  
(P-Kit, bushing lube, standard  
for these series)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
203-7276	22	61	76	24


**Tractor Yoke**

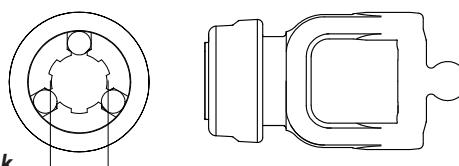

Safety Slide Lock


Item Number	Dim. "A" Bore
107-8206	1 3/8" x 6 Spl.

**Center Housing**




Item Number	
305-8200	

**Extended Lubrication  
Cross & Bearing Kit**  
(E-Kit, bushing lube)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
204-7276	22	61	76	24


**Inner Profile Yoke**  
(for AB2)



Item Number	Dim. "A" mm
301-6229	29

**Inner Tube**  
(for AB2)

Dim. "A" 29.5mm  
Wall 4.2mm  
Rilsan Coating




Item Number	Length m
611-2904-100	1.0
611-2904-150	1.5

# CATEGORY 2, AB2 and AW20 series

## 80° World Wide Constant Velocity


### Outer Tube (for AB2)

Dim. "A" 36.0mm  
Wall 3.2mm  
Special, for rilsan tube



Item Number	Length m
612-3603-100	1.0
612-3603-150	1.5


### Inner Profile Yoke (for AW20)

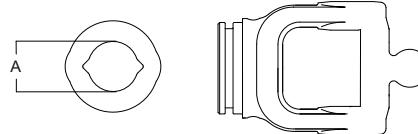

Item Number	Dim. "A" mm
301-7234	34

### Inner Tube (for AW20)


Dim. "A" 35.0mm  
Wall 4.2mm  
Rilsan Coating



Item Number	Length m
621-3404-100	1.0
621-3404-150	1.5

### Outer Tube (for AW20)

Dim. "A" 41.0mm  
Wall 2.7mm  
Special, for rilsan tube



Item Number	Length m
622-4103-100	1.0
622-4103-150	1.5

### Roll Pin




Item Number	Dim. "A" mm	Dim. "B" mm
508-1065	10	65

### 80° WWCV Joint

Category 2

#### AB2

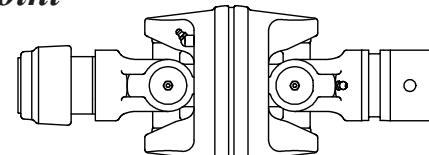


Item Number	Bore	Side
1505-6206-00 (P-Kit)	1 3/8" x 6 Spl. SSL	Tractor

#### AW20

Item Number	Bore	Side
1505-7206-00 (P-Kit)	1 3/8" x 6 Spl. SSL	Tractor


### Guard (incl. Bearing Kit)

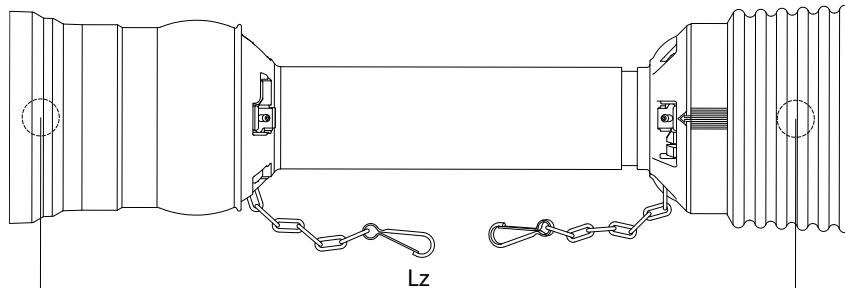

Item Number	Compressed Length (Lz) center cross - center cross
914-3000-086	860mm
914-3000-101	1010mm
914-3000-121	1210mm

## CATEGORY 2, AB2 and AW20 series 80° World Wide Constant Velocity

### PTO drive shaft

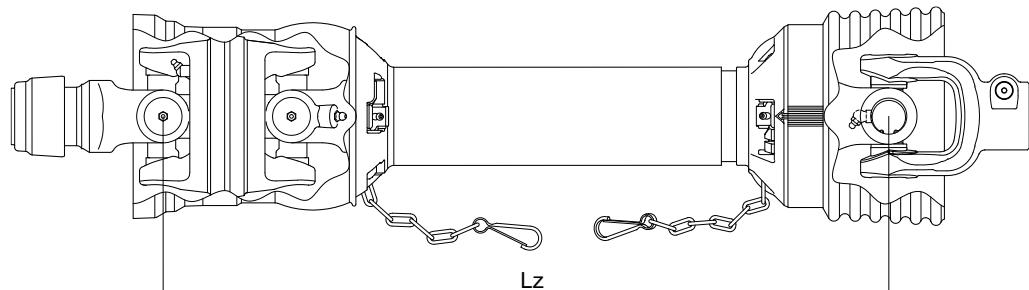


**80° WWCV**  
**AB2 series**  
**With Cross & Bearing P-Kit**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1800-6202-086	860mm	1 3/8" x 6 Spl. SSL	1 3/8" x 6 Spl. QD
1800-6202-101	1010mm	1 3/8" x 6 Spl. SSL	1 3/8" x 6 Spl. QD
1800-6202-121	1210mm	1 3/8" x 6 Spl. SSL	1 3/8" x 6 Spl. QD


**80° WWCV**  
**AW20 series**  
**With Cross & Bearing P-Kit**

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1800-7202-086	860mm	1 3/8" x 6 Spl. SSL	1 3/8" x 6 Spl. QD
1800-7202-101	1010mm	1 3/8" x 6 Spl. SSL	1 3/8" x 6 Spl. QD
1800-7202-121	1210mm	1 3/8" x 6 Spl. SSL	1 3/8" x 6 Spl. QD

## CATEGORY 3 Equal Arm, AB4 and AW21 series 80° World Wide Constant Velocity

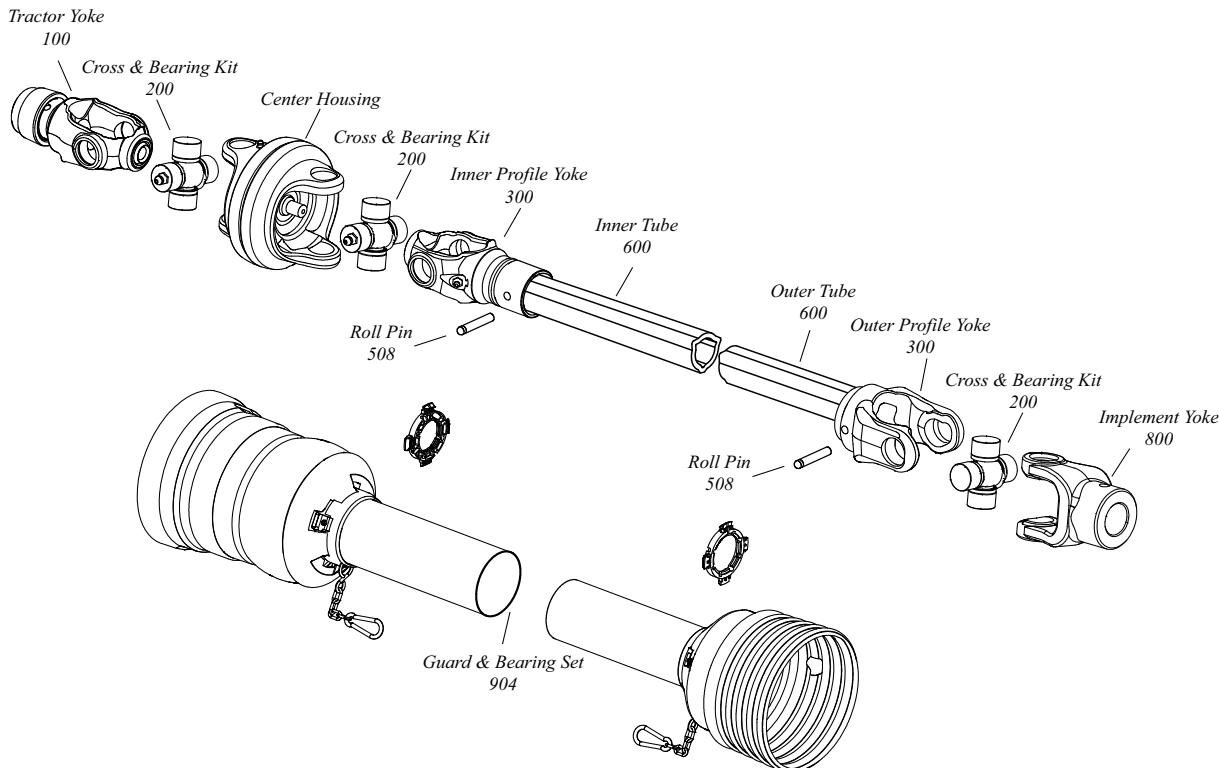


**Extended Lubrication Cross & Bearing Kit**  
(E-Kit, bushing lube)




Item Number	Dim. "A" mm	Dim. "B" mm
214-1430	27	81.8

**Tractor Yoke**

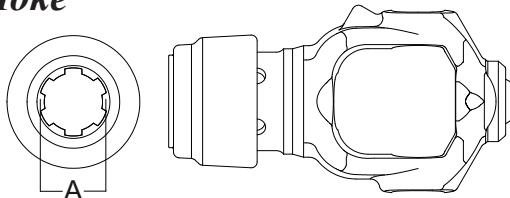


Item Number	Dim. "A" Bore
121-1406	1 3/8" x 6 Spl.

**Center Housing**




Item Number	Length m
611-3604-100	1.0
611-3604-150	1.5

**Inner Profile Yoke**  
(for AB4)

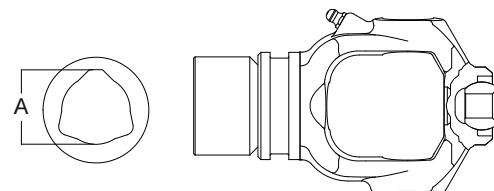


Item Number	Dim. "A" mm
314-3836	36

**Inner Profile Yoke**  
(for AW21)

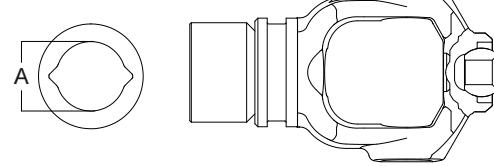

Item Number	Dim. "A" mm
314-3834	34

**Inner Tube**  
(for AB4)



Item Number	Length m
611-3604-100	1.0
611-3604-150	1.5

## CATEGORY 3 Equal Arm, AB4 and AW21 series 80° World Wide Constant Velocity

### Outer Tube

(for AB4)


Dim. "A" 43.5mm  
Wall 3.2mm  
Special, for rilsan tube



### Outer Tube

(for AW21)

Dim. "A" 41.0mm  
Wall 2.7mm  
Special, for rilsan tube




Item Number	Length m
612-4303-100	1.0
612-4303-150	1.5

Length m
1.0
1.5

### Inner Tube

(for AW21)


Dim. "A" 35.0mm  
Wall 4.2mm  
Rilsan Coating



Item Number	Length m
621-3404-100	1.0
621-3404-150	1.5

### 80° WWCV Joint

Category 3

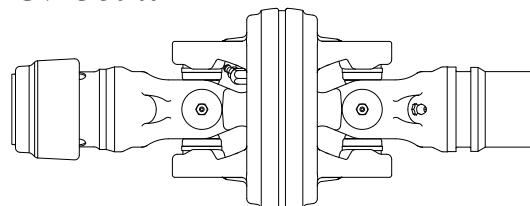


AB4

Item Number	Bore	Side
1501-6406-01 (E-Kit)	1 3/8" x 6 Spl. AL	Tractor

AW21

Item Number	Bore	Side
1501-7406-01 (E-Kit)	1 3/8" x 6 Spl. AL	Tractor

### Guard (incl. Bearing Kit)

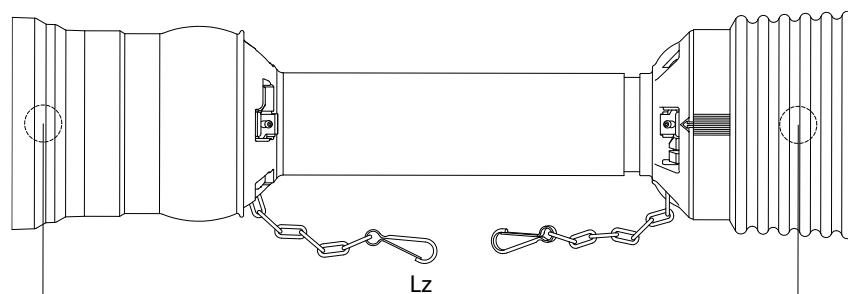


Item Number	Compressed Length (Lz) center cross - center cross
-------------	-------------------------------------------------------

## CATEGORY 3 Equal Arm, AB4 and AW21 series

### 80° World Wide Constant Velocity

#### *PTO drive shaft*

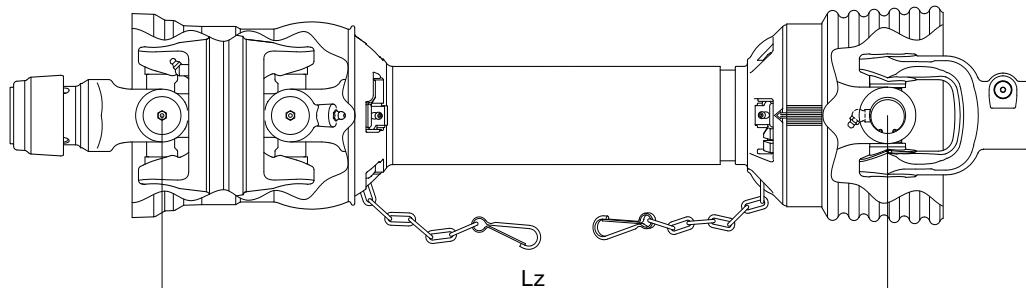

#### 80° WWCV

#### AB4 series

#### With Cross & Bearing E-Kit

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1811-6401-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-6401-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-6401-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD

#### 80° WWCV


#### AW21 series

#### With Cross & Bearing E-Kit


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1811-7401-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-7401-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-7401-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD

# CATEGORY 4, AB6 and AW35 series

## 80° World Wide Constant Velocity

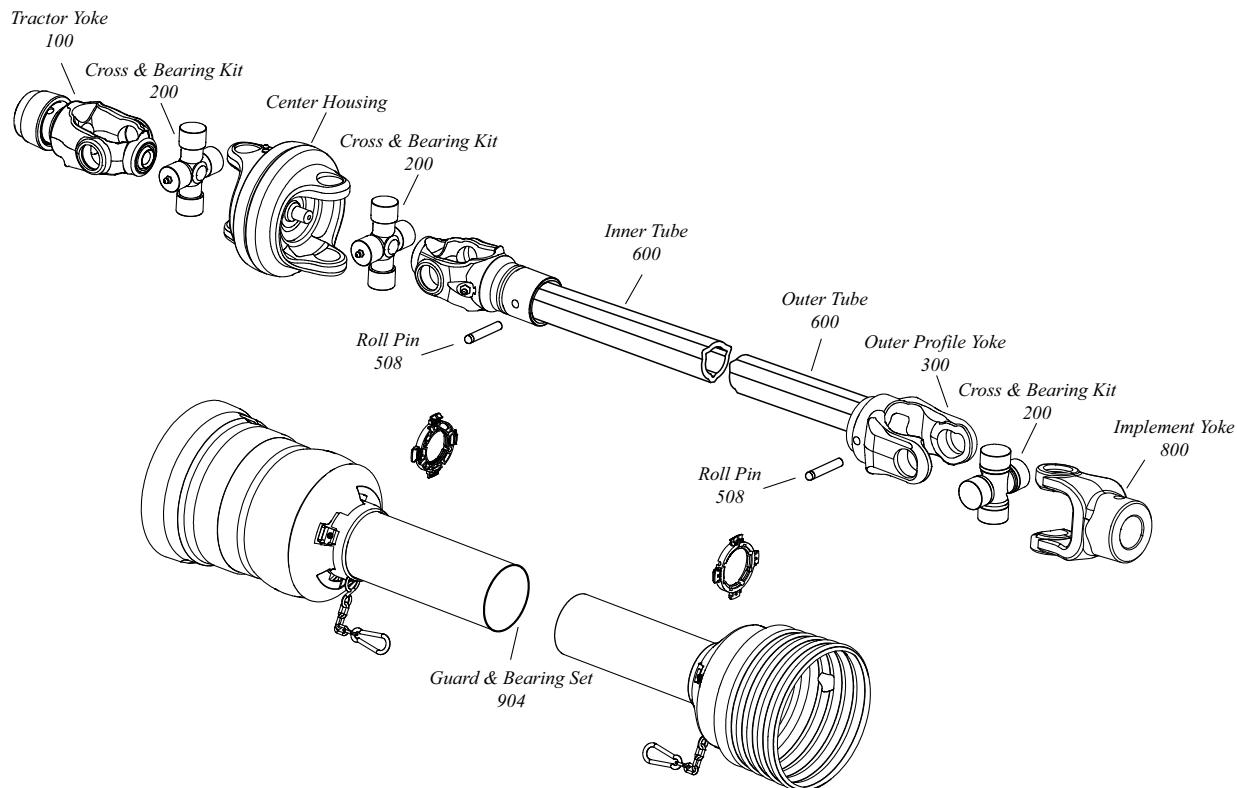


**Extended Lubrication  
Cross & Bearing Kit**  
(E-Kit, bushing lube, standard  
for AB6 series)




Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
204-3540	28.6	81.3	108.0	31.8

**Cross & Bearing Kit**  
(P-Kit, bushing lube, standard  
for AW35series)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
203-3540	28.6	81.3	108.0	31.8

### Tractor Yoke

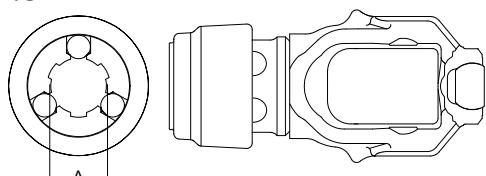


**Auto-Lok**

Item Number	Dim. "A" Bore
113-3506	1 3/8" x 6 Spl.
113-3520	1 3/4" x 20 Spl.
113-3521	1 3/8" x 21 Spl.


CV-Series

### Center Housing




Item Number	Length m
550-1430	1.0
	1.5

**Inner Profile Yoke**  
(for AB6)

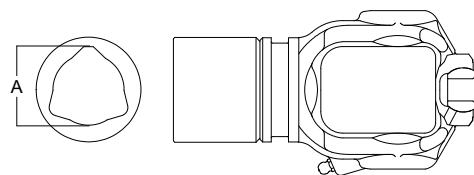

Item Number	Dim. "A" mm
304-4845	45

**Inner Tube**  
(for AB6)




Item Number	Length m
611-4504-100	1.0
611-4504-150	1.5

# CATEGORY 4, AB6 and AW35 series

## 80° World Wide Constant Velocity


### Outer Tube (for AB6)

Dim. "A" 54.0mm  
Wall 4.3mm  
Special, for rilsan tube



Item Number	Length m
612-5404-100	1.0
612-5404-150	1.5


### Inner Profile Yoke (for AW35)

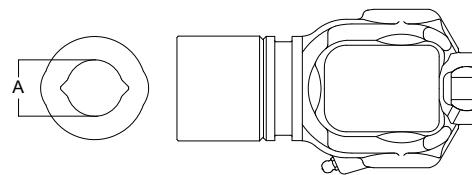

Item Number	Dim. "A" mm
304-4839	39


### Inner Tube (for AW35)

Dim. "A" 40.0mm  
Wall 4.8mm  
Rilsan Coating




Item Number	Length m
621-3905-100	1.0
621-3905-150	1.5

### Outer Tube (for AW35)



Item Number	Length m
622-4804-100	1.0
622-4804-150	1.5


### Roll Pin



Item Number	Dim. "A" mm	Dim. "B" mm
508-1065	10	65

### 80° WWCV Joint Category 4

#### AB6

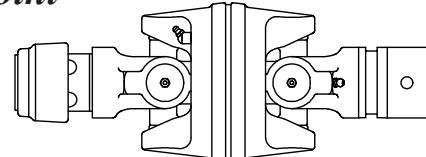


Item Number	Bore	Side
1501-6606-01 (E-Kit)	1 3/8" x 6 Spl. AL	Tractor

#### AW35

Item Number	Bore	Side
1501-7606-00 (P-Kit)	1 3/8" x 6 Spl. AL	Tractor


### Guard (incl. Bearing Kit)

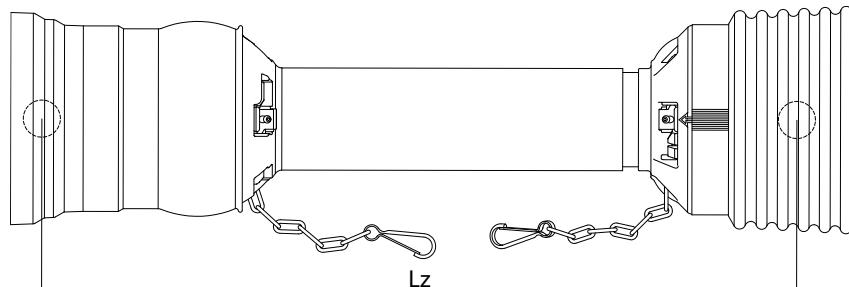

Stock Number	Compressed Length (Lz) center cross - center cross
914-3200-086	860mm
914-3200-101	1010mm
914-3200-121	1210mm

## CATEGORY 4, AB6 and AW35 series 80° World Wide Constant Velocity

### PTO drive shaft

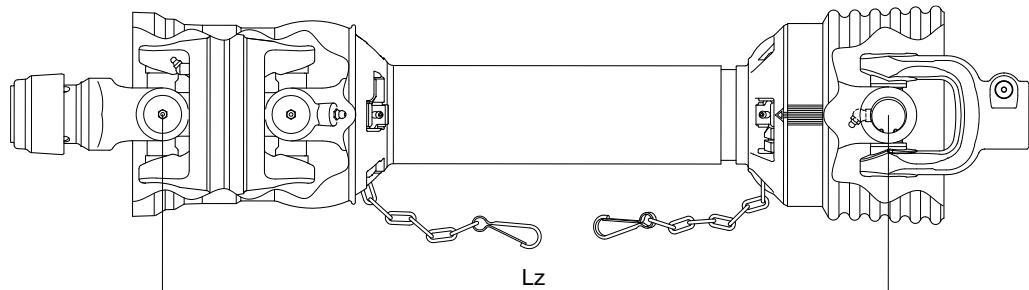


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1811-6601-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-6601-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-6601-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD

**80° WWCV**  
**AW35 series**  
**With Cross & Bearing P-Kit**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1800-7601-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1800-7601-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1800-7601-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD

# CATEGORY 5, AW36 series

## 80° World Wide Constant Velocity

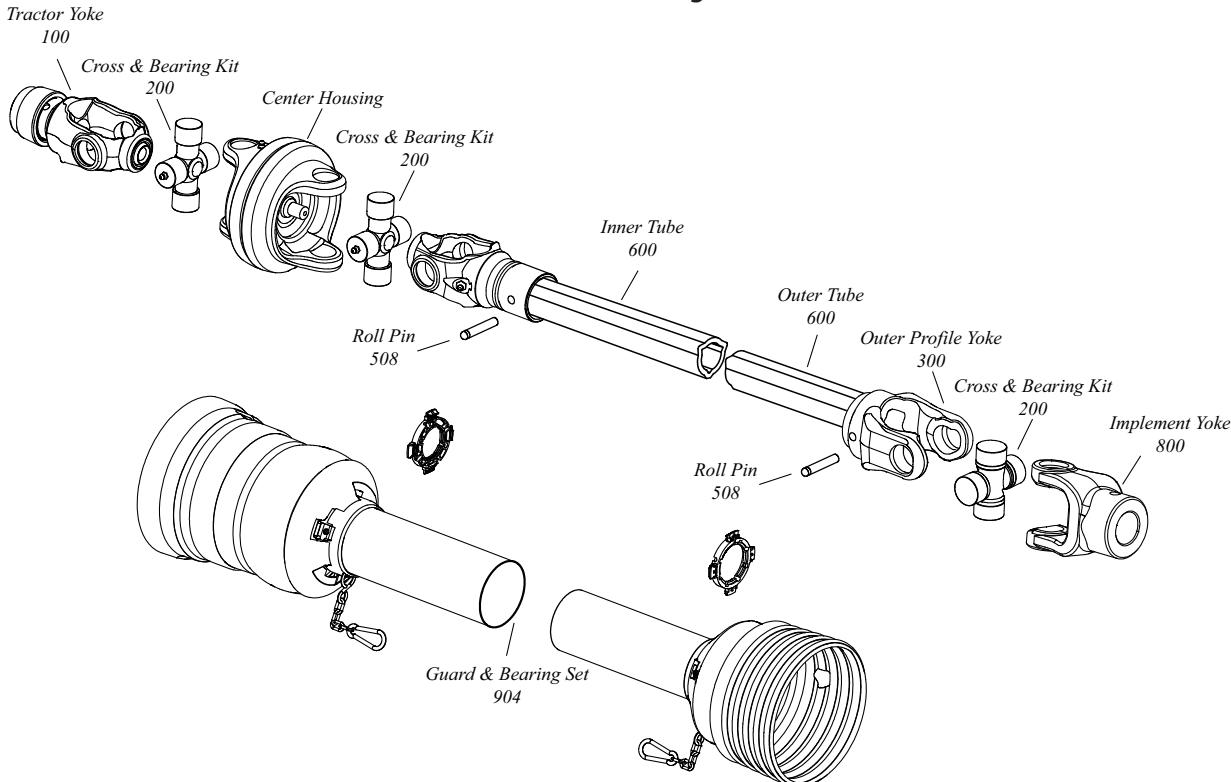


**Cross & Bearing Kit**  
(P-Kit, bushing lube, standard  
for these series)




Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
203-3545	31.8	81.3	109.2	31.8

**Extended Lubrication  
Cross & Bearing Kit**  
(E-Kit, bushing lube)



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
204-3545	31.8	81.3	109.2	31.8


### Tractor Yoke

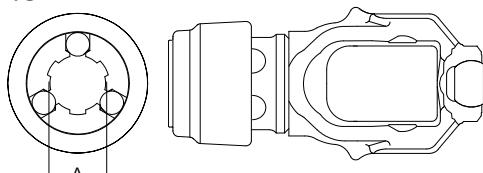

Auto-Lok

Item Number	Dim. "A" Bore
111-3506	1 3/8" x 6 Spl.
111-3520	1 3/4" x 20 Spl.
111-3521	1 3/8" x 21 Spl.
111-3528	1 3/4" x 6 Spl.

### Center Housing





Item Number
550-3545

# CATEGORY 5, AW36 series

## 80° World Wide Constant Velocity

**Inner Profile Yoke**  
(for AW36, star)





Item Number	Dim. "A" mm
304-5851	51

Dim. "A" mm
51

**Inner Tube**  
(for AW36)


Dim. "A" 51.5mm  
Rilsan Coating



Item Number	Length m
631-5100-100	1.0
631-5100-150	1.5

Length m
1.0
1.5

**Roll Pin**





Item Number	Dim. "A" mm
508-1085	10

Dim. "A" mm
10

Dim. "B" mm
85

**Outer Tube**  
(for AW36)

Dim. "A" 61.0mm  
Wall 4.0mm  
Special, for rilsan tube




Item Number	Length m
632-6104-100	1.0
632-6104-150	1.5

Length m
1.0
1.5


**80° WWCV Joint**  
Category 5

**AW36**

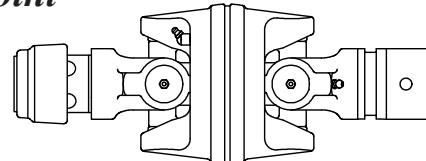

Item Number	Bore	Side
1501-7906-00 (P-Kit)	1 3/8" x 6 Spl. AL	Tractor

**Guard**  
(incl. Bearing Kit)

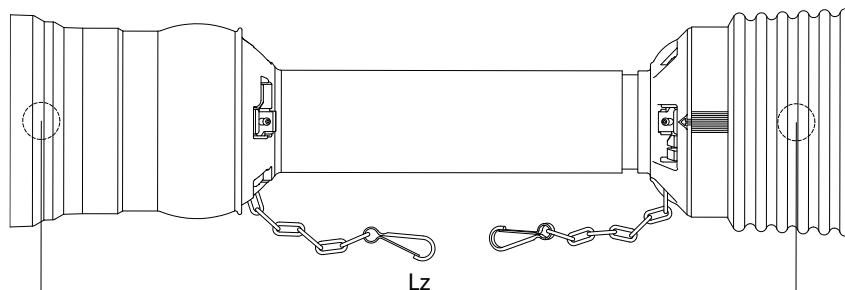


Item Number	Compressed Length (Lz) center cross - center cross
914-3300-086	860mm
914-3300-101	1010mm
914-3300-121	1210mm

Compressed Length (Lz) center cross - center cross
860mm
1010mm
1210mm

## CATEGORY 5, AW36 series

### 80° World Wide Constant Velocity

#### *PTO drive shaft*

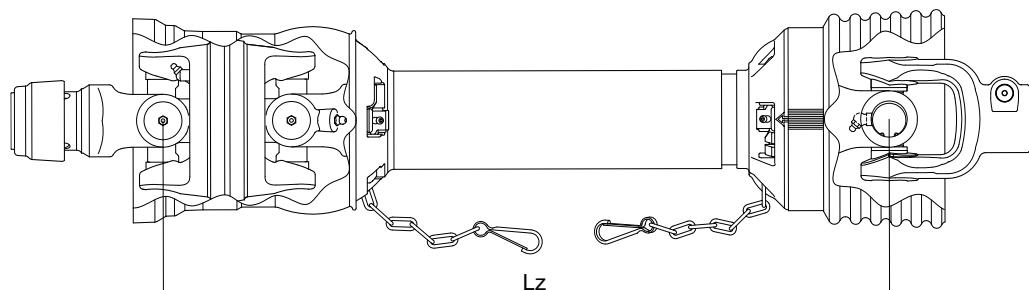


**80° WWCV  
AW36 series  
With Cross & Bearing P-Kit**


Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1800-7901-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1800-7901-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1800-7901-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD

# CATEGORY 6, AB8 and AB9 series

## 80° World Wide Constant Velocity

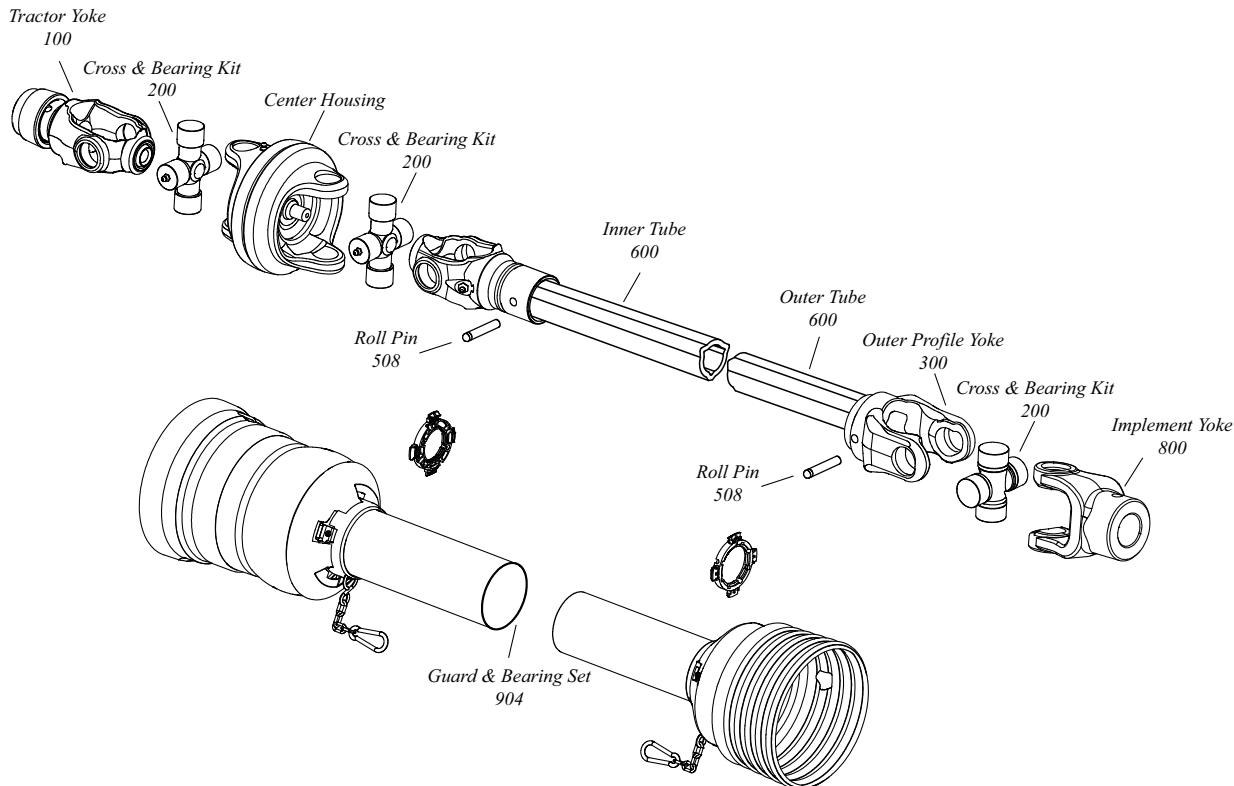


**Extended Lubrication  
Cross & Bearing Kit  
(E-Kit, bushing lube, standard  
for AB9 series)**




Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
204-5556	33.3	94.5	110.7	38.9

**Cross & Bearing Kit  
(P-Kit, bushing lube, standard  
for AB8 series)**



Item Number	Dim. "A" mm	Dim. "B" mm	Dim. "C" mm	Dim. "D" mm
203-5556	33.3	94.5	110.7	38.9


**Tractor Yoke**

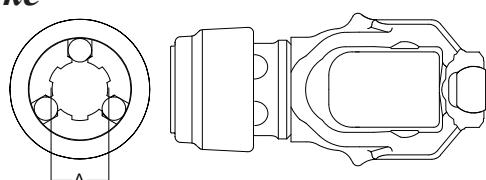

**Auto-Lok**


Item Number	Dim. "A" Bore
111-5506	1 3/8" x 6 Spl.
111-5520	1 3/4" x 20 Spl.
111-5521	1 3/8" x 21 Spl.

**Inner Profile Yoke  
(for AB8, AB9)**

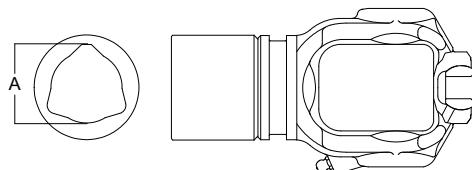

Item Number	Dim. "A" mm
304-6854	54

**Center Housing**



Item Number
550-5556

**Inner Tube  
(for AB8)**

Dim. "A" 54.0mm  
Wall 4.7mm  
Rilsan Coating



Item Number	Length m
611-5404-100	1.0
611-5404-150	1.5


# CATEGORY 6, AB8 and AB9 series

## 80° World Wide Constant Velocity

### Inner Tube

(for AB9)

Dim. "A" 54.0mm  
Wall 5.2mm  
Rilsan Coating




Item Number	Length m
611-5405-100	1.0
611-5405-150	1.5

### Outer Tube

(for AB8, AB9)

Dim. "A" 63.0mm  
Wall 3.9mm  
Special, for rilsan tube



Item Number	Length m
612-6304-100	1.0
612-6304-150	1.5


### Roll Pin




Item Number	Dim. "A" mm	Dim. "B" mm
508-1090	10	90

### 80° WWCV Joint

Category 6

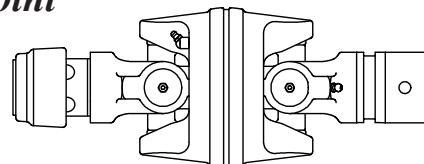


### Guard (incl. Bearing Kit)

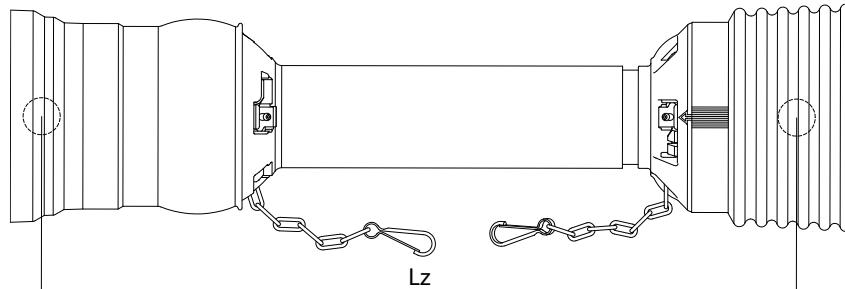

Item Number	Compressed Length (Lz) center cross - center cross
914-3400-086	860mm
914-3400-101	1010mm
914-3400-121	1210mm

### PTO drive shaft

80° WWCV  
AB8 series  
With Cross & Bearing P-Kit

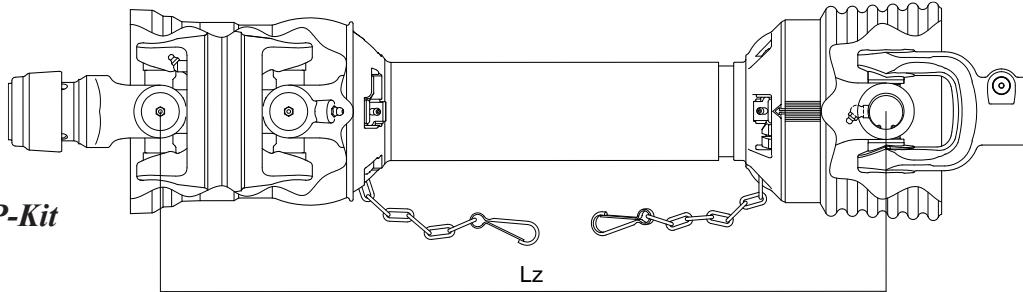

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1800-6801-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1800-6801-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1800-6801-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD

80° WWCV  
AB9 series  
With Cross & Bearing E-Kit

Item Number	Compressed Length (Lz) center cross - center cross	Tractor Yoke	Implement Yoke
1811-6901-086	860mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-6901-101	1010mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD
1811-6901-121	1210mm	1 3/8" x 6 Spl. AL	1 3/8" x 6 Spl. QD



Weasler®

# SAFETY CLUTCHES

Safety  
Clutches

# Safety Clutches


## OVERRUNNING CLUTCH

This clutch will prevent the machine from driving the tractor when the operation of the driveshaft has halted. The free running or overrunning direction is dependent on the drive direction of the PTO drive shaft.

An overrunning clutch with direction R will 'overrun' in the clockwise direction and an overrunning clutch with direction L will 'overrun' in the counter clockwise direction.

Any implement with a large rotating moment of inertia may need protection by allowing it to free wheel to a stop, independent of when the tractor PTO shaft is stopped. Overrunning clutches will not absorb any energy, so inertia start-up peaks must be damped by other means.

The clutch is most frequently used on high inertia machines like large square balers, mowers and wood chippers.

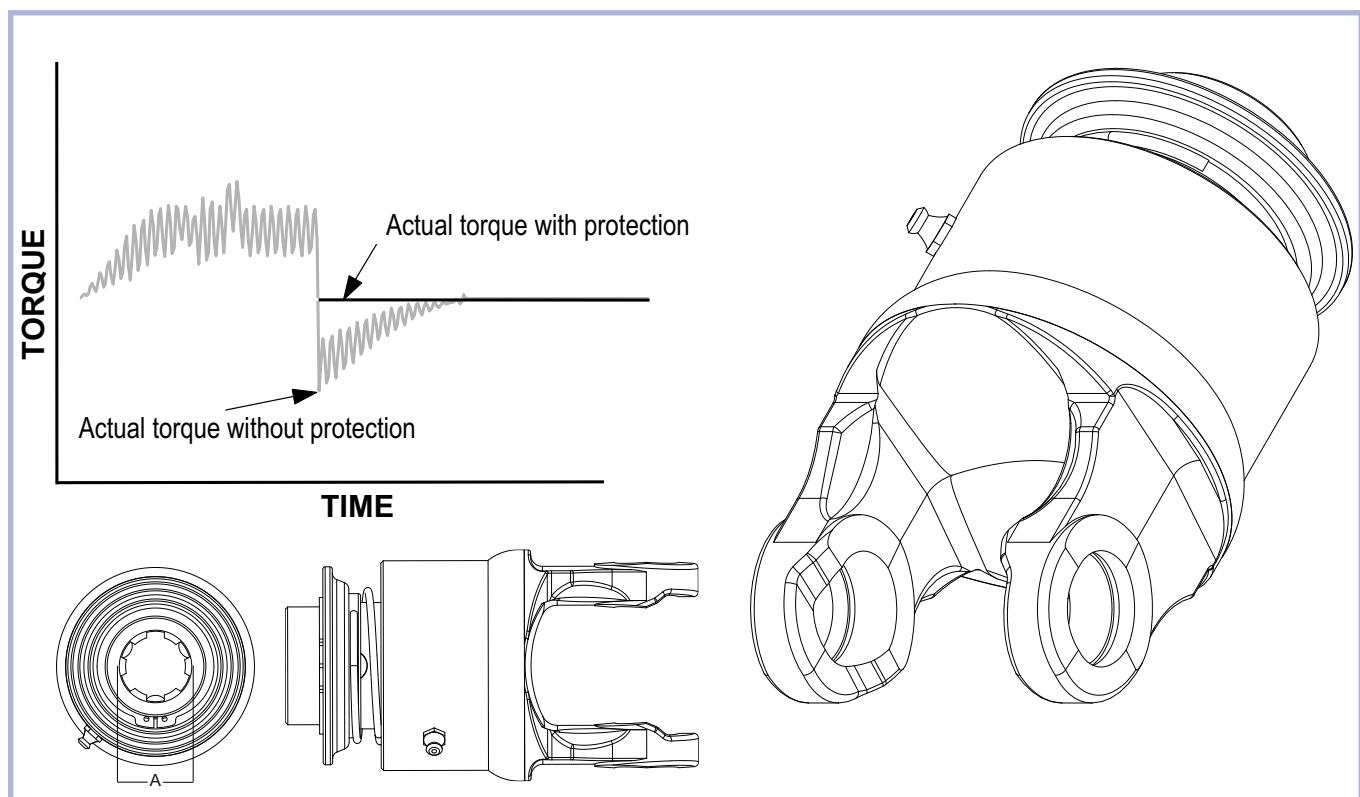

### Overrunning Clutch

*Right turning / clockwise*

Item Number	Series	Dim. "A" Bore
550-7106-00	AW10	1 3/8" x 6 Spl. QDSL
550-8206-00	AB2 / AW20	1 3/8" x 6 Spl. QDSL
550-8406-00	AB4 / AW21	1 3/8" x 6 Spl. QDSL
550-6506-00	AB5	1 3/8" x 6 Spl. QDSL
550-8606-00	AB6 / AW22	1 3/8" x 6 Spl. QDSL
550-6806-00	AB8 / AW24	1 3/8" x 6 Spl. QDSL
550-7606-00	AW35	1 3/8" x 6 Spl. QDSL
550-7906-00	AW36	1 3/8" x 6 Spl. QDSL

*Left turning / counter clockwise*

Item Number	Series	Dim. "A" Bore
550-8206-55	AB2 / AW20	1 3/8" x 6 Spl. QDSL
550-8406-55	AB4 / AW21	1 3/8" x 6 Spl. QDSL
550-8606-55	AB6 / AW22	1 3/8" x 6 Spl. QDSL
550-7606-55	AW35	1 3/8" x 6 Spl. QDSL


# Safety Clutches

## RATCHET CLUTCH

A ratchet clutch will operate as soon as the calibrated torque value is exceeded. During operation of the clutch, the torque is transmitted in pulses accompanied by an audible sound. The clutch will stop slipping when the transmitted torque drops below the calibrated torque value. It is recommended to lower the torque as soon as possible to prevent overheating and excessive wear.

The ratchet clutch allows implement overload protection with a unique pulsating torque during disengagement. The clutch slips in a pulsating manner when overload occurs, which aids in pushing the blockage through. Therefore, the operator may not need to leave the operator seat or even slow down to clear the blockage.

The clutch is most frequently used for baler pick-ups (built-in), combines (built-in), spreaders, rakes and tedders.

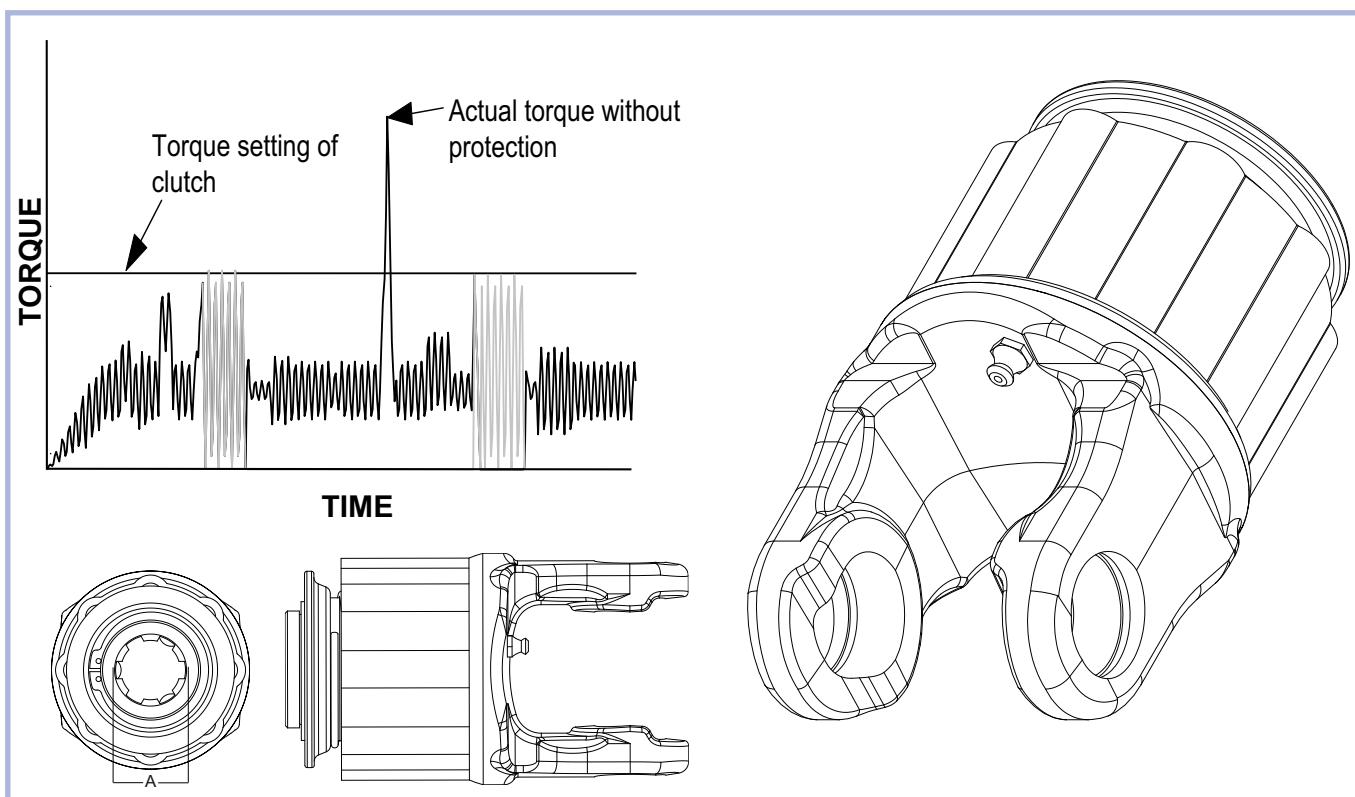

### Ratchet Clutch

Item Number	Series	Torque (Nm)	Dim. "A" Bore
570-6106-01	AB1	300	1 3/8" x 6 Spl. QDSL
570-6106-02	AB1	600	1 3/8" x 6 Spl. QDSL
570-7106-01	AW10	300	1 3/8" x 6 Spl. QDSL
570-7106-02	AW10	600	1 3/8" x 6 Spl. QDSL
570-8206-01	AB2 / AW20	300	1 3/8" x 6 Spl. QDSL
570-8206-02	AB2 / AW20	600	1 3/8" x 6 Spl. QDSL
570-8206-03	AB2 / AW20	900	1 3/8" x 6 Spl. QDSL
570-8306-03	AB3	900	1 3/8" x 6 Spl. QDSL
570-8406-02	AB4 / AW21	600	1 3/8" x 6 Spl. QDSL
570-8406-03	AB4 / AW21	900	1 3/8" x 6 Spl. QDSL
570-8406-04	AB4 / AW21	1200	1 3/8" x 6 Spl. QDSL

Item Number	Series	Torque (Nm)	Dim. "A" Bore
570-7606-03	AW35	900	1 3/8" x 6 Spl. QDSL
570-7606-04	AW35	1200	1 3/8" x 6 Spl. QDSL
570-7606-05	AW35	1500	1 3/8" x 6 Spl. QDSL
570-8606-03	AB6 / AW22	900	1 3/8" x 6 Spl. QDSL
570-8606-04	AB6 / AW22	1200	1 3/8" x 6 Spl. QDSL
570-8606-05	AB6 / AW22	1500	1 3/8" x 6 Spl. QDSL


# Safety Clutches

## SHEAR BOLT CLUTCH

A shear bolt clutch will operate as soon as the shear torque of the bolt is exceeded. The shearing torque is influenced by the material of the bolt, the bolt size and the distance from the bolt centre to the clutch centre. When the shear torque has been exceeded, the bolt needs to be replaced to start operating again. It is very important to replace the exact same bolt type to guarantee safe operation of the clutch.

The shear bolt clutch offers simple, economical overload protection. The clutch disconnects the power source from the drivetrain when overload occurs. During disengagement, the design does not allow or generate damaging torque spikes or heat. After the operator replaces the easily accessible bolt, the machine can be restarted.

The clutch is most frequently used on machines where clutch activation is seldom observed like pick-ups (built-in), flywheel equipped machines (built-in) and stone crushers.

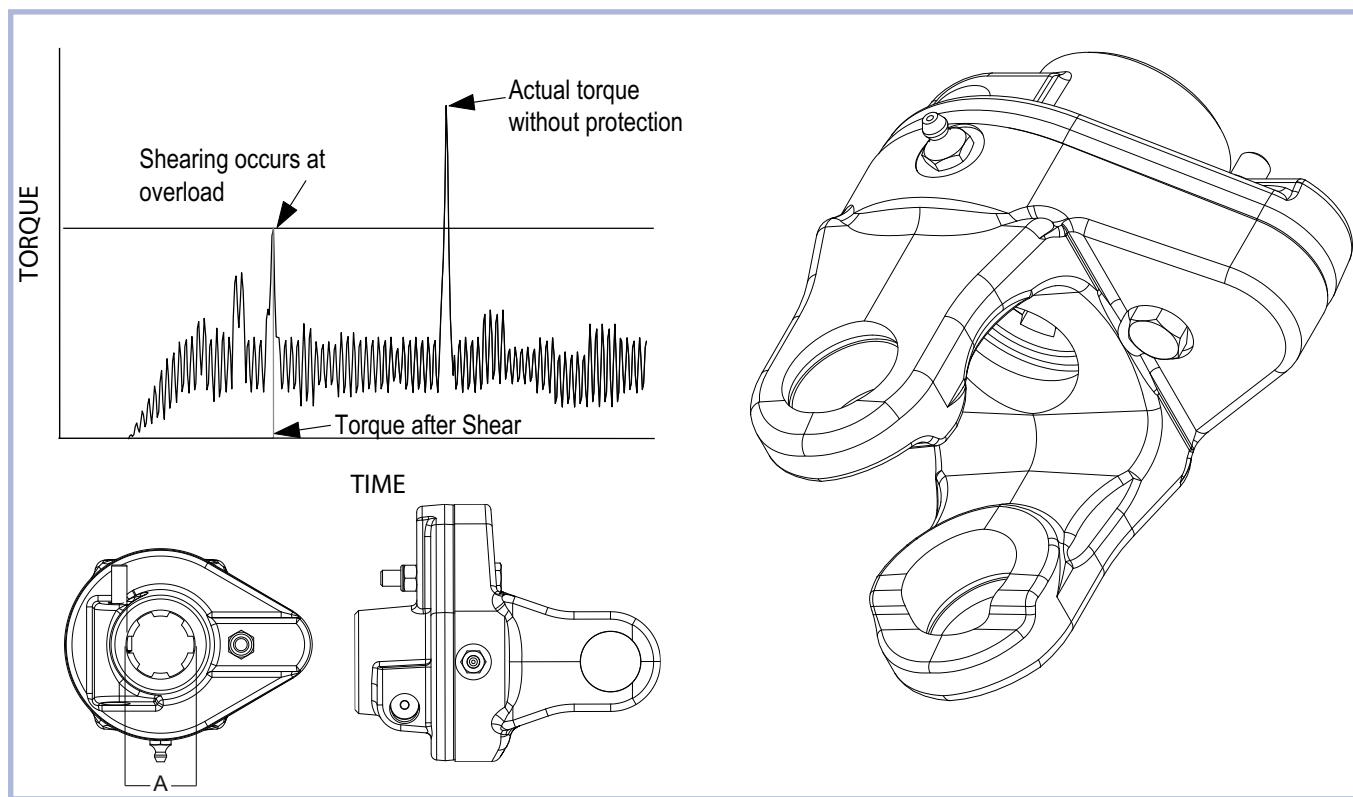

### Shear Bolt Clutch

Item Number	Series	Torque (Nm)	Dim. "A" Bore
580-8206-03	AB2 / AW20	900	1 3/8" x 6 Spl. QD
580-8406-18	AB4 / AW21	1600	1 3/8" x 6 Spl. QD
580-8406-19	AB4 / AW21	1860	1 3/8" x 6 Spl. QD
580-6506-19	AB5	1860	1 3/8" x 6 Spl. QD
580-7606-19	AW35	1860	1 3/8" x 6 Spl. QD
580-7606-20	AW35	2120	1 3/8" x 6 Spl. QD
580-7606-22	AW35	2920	1 3/8" x 6 Spl. QD
580-7906-22	AW36	2920	1 3/8" x 6 Spl. QD
580-7906-23	AW36	3330	1 3/8" x 6 Spl. QD
580-8606-22	AB6 / AW22	2920	1 3/8" x 6 Spl. QD
580-6828-24	AB8 / AW24	4180	1 3/4" x 6 Spl. QD
580-6806-24	AB8 / AW24	4180	1 3/8" x 6 Spl. QD


# Safety Clutches

## FRICITION CLUTCH

A friction clutch will operate as soon as the calibrated torque value is being exceeded. During operation of the clutch, the torque is transmitted without pulses. The clutch will stop slipping when the transmitted torque drops below the calibrated torque value. It is recommended to activate the clutch before the start of every season. Minimum clutch operation prevents overheating and excessive wear of the friction discs.

The friction clutch is indispensable in certain agricultural implement applications. The friction clutch is the only torque limiter to continuously transmit power while overloaded. This is valuable during start up of high inertia machines, as well as for leveling out torsional fluctuations due to high cyclical loads. During operation the clutch transmits limited power.

The clutch is most frequently used on high inertia machines like large square balers and mowers.

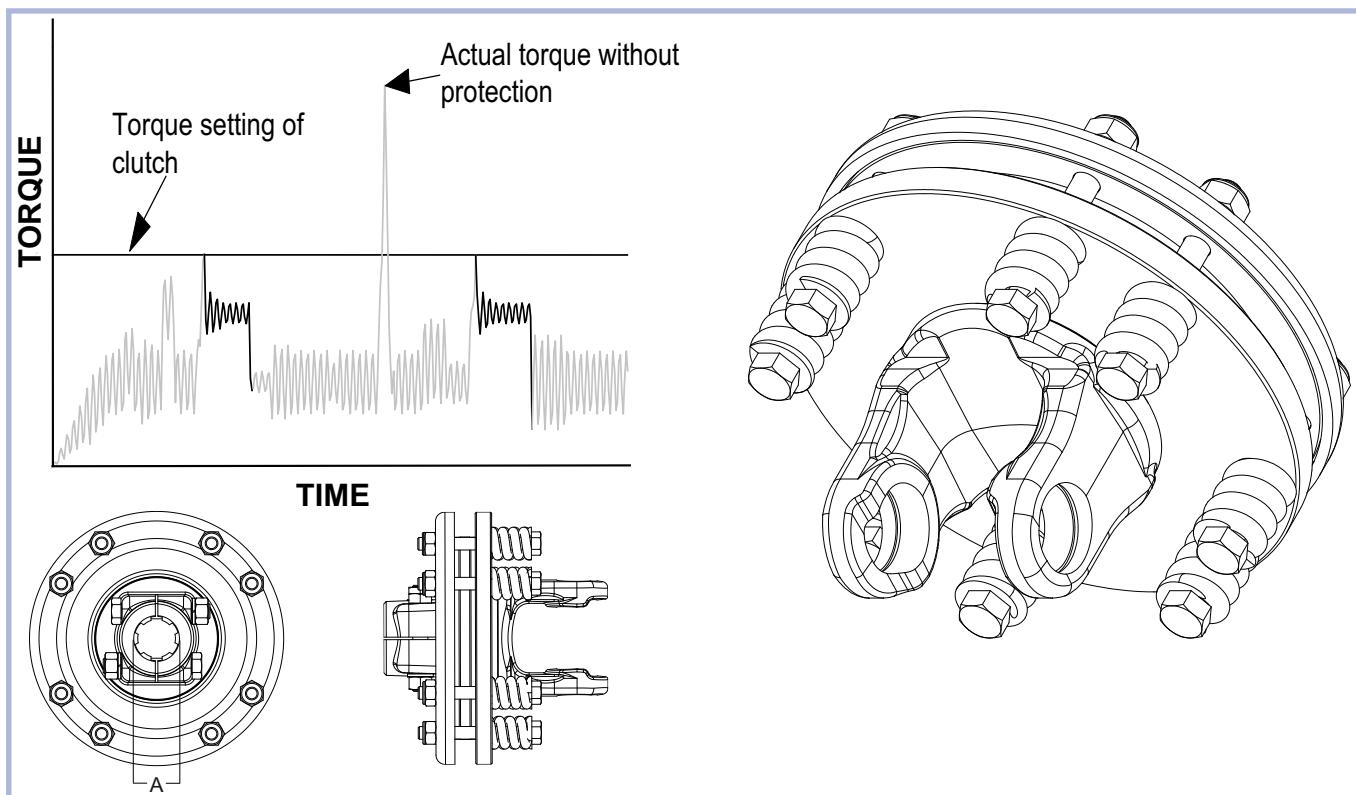

### Friction Clutch

Item Number	Series	Torque (Nm)	Dim. "A" Bore
560-8406-03	AB4 / AW21	900	1 3/8" x 6 Spl. QDSL
563-6506-03	AB5	900	1 3/8" x 6 Spl. CBI
563-6506-07	AB5	1250	1 3/8" x 6 Spl. CBI
563-7606-07	AW35	1250	1 3/8" x 6 Spl. CBI
563-7628-05	AW35	1500	1 3/4" x 6 Spl. CBI
563-7606-05	AW35	1500	1 3/8" x 6 Spl. CBI
563-7628-08	AW35	2000	1 3/4" x 6 Spl. CBI
563-7606-08	AW35	2000	1 3/8" x 6 Spl. CBI
563-8628-07	AB6 / AW22	1250	1 3/4" x 6 Spl. CBI
563-8606-07	AB6 / AW22	1250	1 3/8" x 6 Spl. CBI
563-8628-05	AB6 / AW22	1500	1 3/4" x 6 Spl. CBI
563-8606-05	AB6 / AW22	1500	1 3/8" x 6 Spl. CBI


Item Number	Series	Torque (Nm)	Dim. "A" Bore
563-7928-05	AW36	1500	1 3/4" x 6 Spl. CBI
563-7906-05	AW36	1500	1 3/8" x 6 Spl. CBI
563-7928-08	AW36	2000	1 3/4" x 6 Spl. CBI
563-7906-08	AW36	2000	1 3/8" x 6 Spl. CBI
563-6828-08	AB8 / AW24	2000	1 3/4" x 6 Spl. CBI
563-6806-08	AB8 / AW24	2000	1 3/8" x 6 Spl. CBI

# Safety Clutches

## VERRUNNING FRICTION CLUTCH

A friction clutch will operate as soon as the calibrated torque value is exceeded. During operation of the clutch, the torque is transmitted without pulses. The clutch will stop slipping when the transmitted torque drops below the calibrated torque value. The overrunning part of the clutch will operate when the operation of the driveshaft has halted. The free running direction or overrunning direction is dependent on the drive direction of the PTO drive shaft. An overrunning clutch with direction R will 'overrun' in the clockwise direction and an overrunning clutch with direction L will 'overrun' in the counter clockwise direction.

The clutch is most frequently used on high inertia machines like large square balers and mowers.

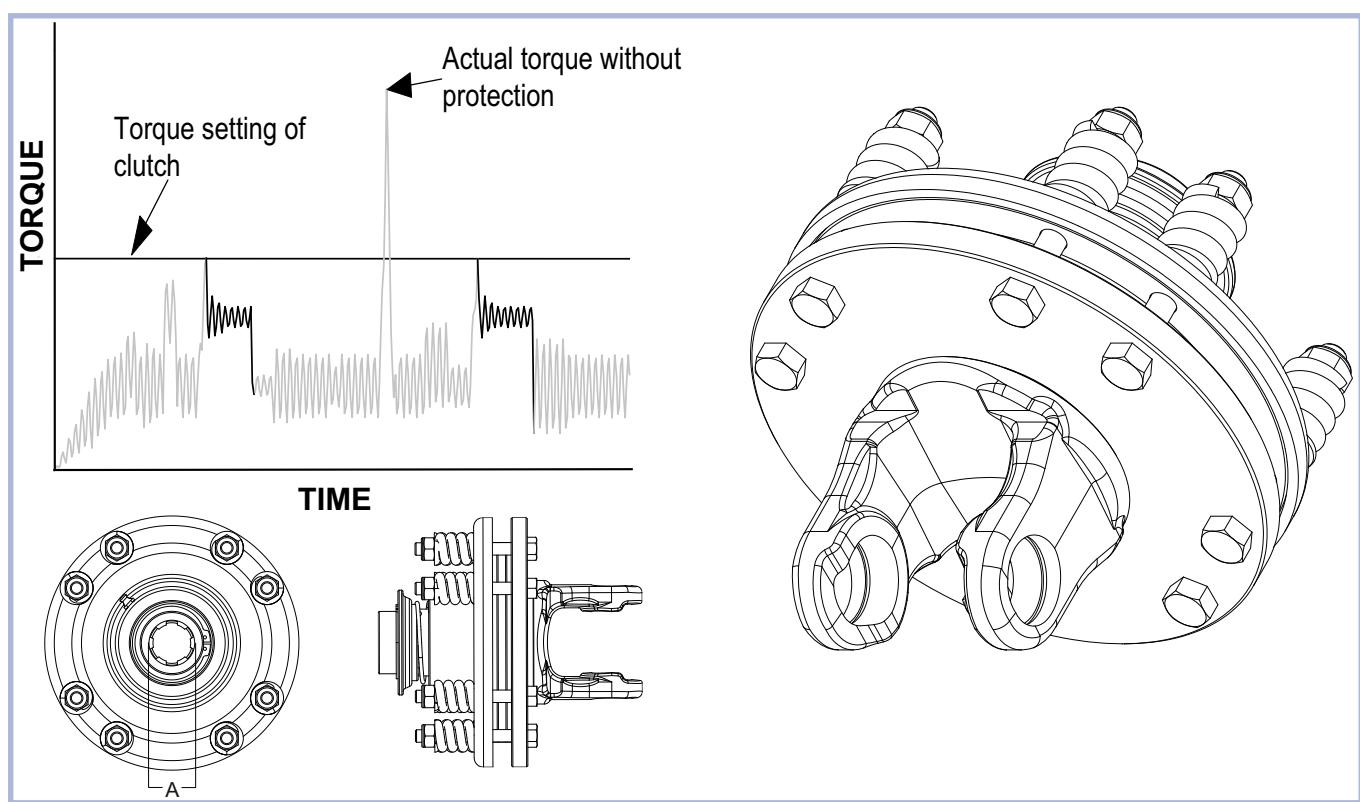

### Overrunning Friction Clutch

Item Number	Series	Torque (Nm)	Dim. "A" Bore
530-8406-06	AB4 / AW21	750	1 3/8" x 6 Spl. QDSL
530-8406-07	AB4 / AW21	1250	1 3/8" x 6 Spl. QDSL
530-7606-03	AW35	900	1 3/8" x 6 Spl. QDSL
530-7606-07	AW35	1250	1 3/8" x 6 Spl. QDSL
530-8606-07	AB6 / AW22	1250	1 3/8" x 6 Spl. QDSL







Weasler®

# PTO SPLINES





## DIMENSIONS & POWER RATING

## PTO Splines





1 1/8"-6

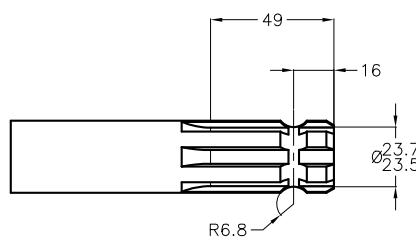





1 3/8"-6

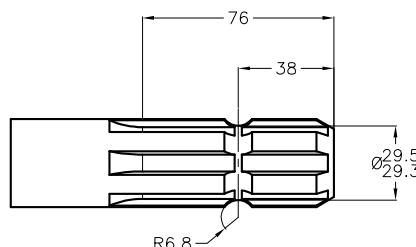

1 3/4"-6



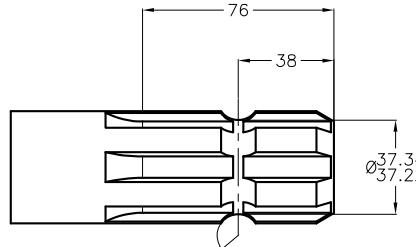



1 3/8"-21



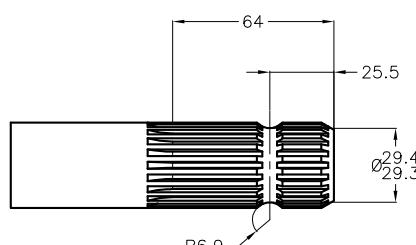



# PTO Splines





1 3/4"-20

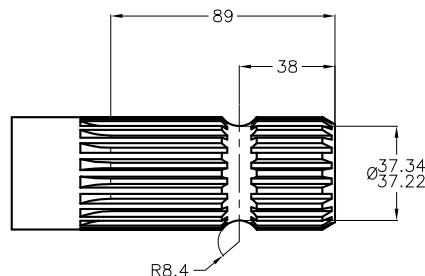





21x25-6

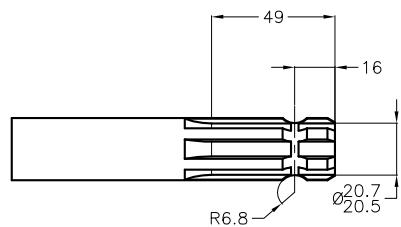

1"x7/8"-15

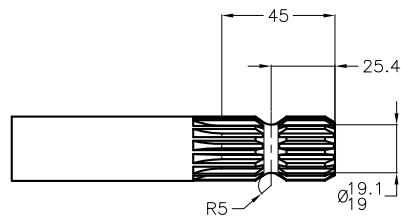

32x38-8

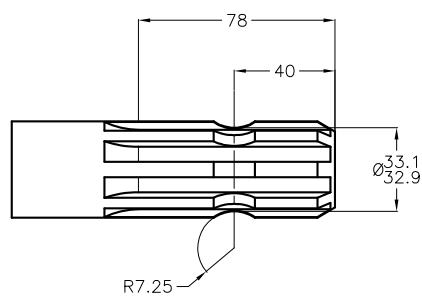

## Dimensions & Power Rating



### Universal joint - Dimensions and power rating

Series	Cross-kit	Profile tubes		Joint capacity										Safety guard	
				Dynamic								Static			
		540 rpm*				1.000 rpm*				Max. P-kit	Max. E-kit	Max.			
		Power P-kits	Power E-kits	Power P-kits	Power E-kits	Power P-kits	Power E-kits	Power P-kits	Power E-kits			No.			
D x A (mm)	D x A (mm)	D x A (mm)	kW*	HP*	kW*	HP*	kW*	HP*	kW*	Nm	Nm	Nm	No.		
AB1	22.0 x 54.0	26.5 x 3.4	32.5 x 2.5	11	15	14	19	17	23	22	342	398	1150	904-1000-***	
AB2	23.8 x 61.2	29.0 x 4.1	36.0 x 3.2	16	21	19	25	24	33	29	38	493	527	1700	
AB3	27.0 x 70.0	36.0 x 3.2	43.5 x 3.4	21	29	28	38	33	44	44	58	668	807	2000	
AB4	27.0 x 74.6	36.0 x 3.9	43.5 x 3.4	27	36	34	45	41	56	52	70	836	960	3400	
AB5	30.2 x 79.4	45.0 x 4.2	51.5 x 3.0	39	52	49	65	60	81	75	100	1212	1382	5300	
AB6	30.2 x 92.0	45.0 x 4.2	54.0 x 4.5	48	64	59	79	73	99	91	122	1483	1687	4300	
AB7N	34.9 x 94.0	45.0 x 5.4	54.0 x 4.5	59	79	70	94	91	122	108	145	1835	1993	5900	
AB8	34.9 x 106.5	54.0 x 4.5	63.0 x 4.1	75	100	90	120	115	154	138	185	2316	2553	6000	
AB9	41.0 x 108.0	54.0 x 4.9	63.0 x 4.1	89	120	113	151	138	185	173	232	2781	3206	7850	
AM77S	45.0 x 126.0	54.0 x 5.9	66.0 x 5.7	-	-	128	171	-	-	197	264	-	5084	12430	

D x A (mm)	kW* HP* kW* HP* kW* HP* kW* HP* Nm Nm Nm No.														
AW10	22.0 x 54.8	23.5 x 4.0	30.0 x 2.9	11	15	14	19	17	23	22	29	349	406	1150	904-2500-***
		23.5 x ----	30.0 x 2.9												
AW20	23.8 x 61.2	34.5 x 4.0	41.0 x 2.9	16	21	19	25	24	33	29	38	493	527	1700	904-2500-***
AW21	27.0 x 74.6	34.5 x 4.0	41.0 x 2.9	27	36	34	45	41	56	52	70	836	960	3400	904-2500-***
		39.5 x 4.5	48.0 x 3.8												
AW35	32.0 x 76.0	39.5 x 4.5	48.0 x 3.8	39	52	49	66	59	80	76	102	1197	1402	5300	904-3500-***

D x A (mm)	kW* HP* kW* HP* kW* HP* kW* HP* Nm Nm Nm No.														
AW35S	32.0 x 76.0	51.0 x ----	61.0 x 4.3	39	52	49	66	59	80	76	102	1197	1402	5300	904-3500-***
		51.0 x ----	61.0 x 4.3												
AW36	36.0 x 88.8	51.0 x ----	61.0 x 4.3	60	80	70	94	92	124	107	144	1864	1987	5900	904-3600-***
AW26	42.0 x 104.0	61.0 x 6.0	71.5 x 5.0	85	113	111	149	130	175	171	230	2628	3166	7850	904-4500-***

\* Applies to a universal joint at an angle of 5° and a life of 1.000 hours.

\*\*\* Length Lz (cm)

## Dimensions & Power Rating



### Wide-angle CV joint - Dimensions and power rating

Series	Cross-kit	Profile tubes	Joint capacity										Safety guard				
			Dynamic								Static						
			540 rpm*				1.000 rpm*				Max. P-kit	Max. E-kit	Max.				
			Power P-kits		Power E-kits		Power P-kits		Power E-kits								
			A x B (mm)	D x A (mm)	D x C (mm)	kW*	HP*	kW*	HP*	kW*	HP*	Nm	Nm	Nm	No.		
AB2-80°			22 x 61 24 x 76	29.5 x 4.2	36.0 x 3.2	16	21	19	25	24	33	29	38	493	527	1700	914-3000-***
AB4-80°			27 x 81.8	36.5 x 4.2	43.5 x 3.2	--	--	39	52	--	--	72	97	--	1186	2938	914-3100-***
AB6-80°			28.6 x 81.3 31.8 x 108.0	45.0 x 4.3	54.0 x 4.3	--	--	58	77	--	--	89	119	--	1491	4519	914-3200-***
AB7N-80°			31.8 x 81.3 31.8 x 109.2	45.0 x 5.6	54.0 x 4.3	58	77	77	103	89	119	118	158	1469	1638	5649	914-3300-***
AB8-80°			33.3 x 94.5 38.9 x 110.7	54.0 x 4.7	63.0 x 3.9	87	117	--	--	134	179	--	--	2260	--	7344	914-3400-***
AB9-80°			33.3 x 94.5 38.9 x 110.7	54.0 x 5.2	63.0 x 3.9	--	--	112	151	--	--	173	232	--	2712	7344	914-3400-***

	A x B (mm) D x C (mm)	D		A		kW*	HP*	kW*	HP*	kW*	HP*	kW*	HP*	Nm	Nm	Nm	No.
		D	D	A	A												
AW20-80°	22 x 61 24 x 76	35.0 x 4.2	41.0 x 2.7	16	21	19	25	24	33	29	38	493	527	1700	914-3000-***		
AW21-80°	27 x 81.8	35.0 x 4.2	41.0 x 2.7	--	--	39	52	--	--	72	97	--	1186	2938	914-3100-***		
AW35-80°	28.6 x 81.3 31.8 x 108.0	40.0 x 4.8	48.0 x 3.6	42	57	58	77	65	87	89	119	1356	1491	4519	914-3200-***		

	A x B (mm) D x C (mm)	D		A		kW*	HP*	kW*	HP*	kW*	HP*	kW*	HP*	Nm	Nm	Nm	No.
		D	D	A	A												
AW36-80°	31.8 x 81.3 31.8 x 109.2	51.5 x ---	61.0 x 4.0	58	77	77	103	89	119	118	158	1469	1638	5649	914-3300-***		

\* Applies to a wide-angle CV joint at an angle of 10° and a life of 1.000 hours.

\*\*\* Length Lz (cm)

*Quality fits. Every time.*

## **N O T E S**



**Weasler®**

**Weasler Engineering BV**

P.O. Box 266

6600 AG Wijchen

The Netherlands

Tel: +31-24-64 89 100

Fax: +31-24-64 89 109

E-mail: [sales@weasler.nl](mailto:sales@weasler.nl)

website: [www.weasler.com](http://www.weasler.com)